



XLC-25-KN-S Series
(Independent type)



XLC-25-KN Series
(Built-in type)



Features

- Constant power mode output with multiple stage selectable by ETS database
- Plastic housing with class II and PFC design
- Flicker free, complying with CE ErP directive
- Standby power consumption <0.5W
- Meet emergency lighting (EL) application
- KNX/EIB protocol, support KNX data secure
- Minimum dimming level 0.5%
- Function:operation hours,power consumption feedback, log/linear curve selection...etc
- 5 years warranty

Applications

- Recessed Light
- Down Light
- Panel Light
- Commercial Lighting
- Decorative Lighting
- KNX digital Lighting

GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

XLC-25-KN Series is a 25W with constant power output LED driver . It can operate from 100~305VAC and output current ranging between 300 mA to 1050 mA selectable by ETS database. The integrated KNX interface avoids using the complicated KNX-DALI gateway.Thanks to high efficiency up to 88%, it is able to operate for -25℃ ~85℃ case temperature under free air convection. XLC-25-KN is designed based on latest safety regulations, and provides more flexibility for LED Lighting application.

Model Encoding

XLC - 25 - H - KN

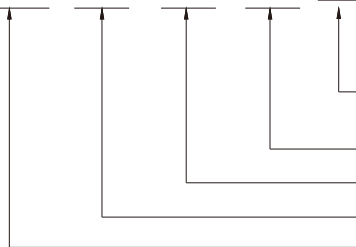

- Casing type: { Blank: without strain-relief (Built-in type)
S: with strain-relief (Independent type)
- Function options (Built-in KNX interface)
- Rated output voltage (H-type)
- Rated wattage
- Series name


Type	Function	Note
KN	Built-in KNX interface,with standby power consumption<0.5W	In stock

SPECIFICATION

MODEL		XLC-25-H-KN□			
OUTPUT	OPEN CIRCUIT VOLTAGE Note.2	60V			
	DEFAULT CURRENT	300mA			
	CURRENT ADJ. RANGE (BY ETS Database)	0.3~1.05A			
	CONSTANT CURRENT REGION Note.3	9~54V			
	RATED POWER Note.4	25W			
	CURRENT RIPPLE	<4%(@full load)			
	CURRENT TOLERANCE	±5%			
	DIMMING RANGE	0~100%			
	SETUP, RISE TIME Note.5	500ms, 100ms/230VAC, 1000ms, 100ms/115VAC			
INPUT	VOLTAGE RANGE	100~ 305VAC 141 ~ 400VDC			
	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)			
	TOTAL HARMONIC DISTORTION	THD<10%(@load ≥ 50%/230VAC; @load ≥ 75%/277VAC), THD<15%(@load ≥ 50%/115VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)			
	EFFICIENCY (Typ.) Note.6	88%			
	AC CURRENT	0.35A / 115VAC 0.18A / 230VAC 0.15A/277VAC			
	INRUSH CURRENT(Typ.)	COLD START 10A(twidth=100μs measured at 50% Ipeak) at 230VAC; Per NEMA 410			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	71 units (circuit breaker of type B) / 71 units (circuit breaker of type C) at 230VAC			
	LEAKAGE CURRENT	<0.75mA / 277VAC			
	STANDBY POWER CONSUMPTION Note.7	Standby power consumption<0.5W(Dimming off)			
	PROTECTION	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed		
		OVER TEMPERATURE	Stage 1: De-rating to 75% loading; Stage 2: De-rating to 50% loading. Recovers automatically after fault condition is removed.		
ENVIRONMENT	WORKING TEMP.	Tcase=-25 ~ 85℃ (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)			
	MAX. CASE TEMP.	Tcase=85℃			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-40 ~ +80℃, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 50℃)			
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes			
SAFETY & EMC	SAFETY STANDARDS	ENEC BS EN/EN61347-1, BS EN/EN61347-2-13(EL) appendix J suitable for emergency installations(DC input 176-280VDC), BS EN/EN62384; GB19510.14, GB19510.1, EAC TP TC 004 approved; Design refer to AS/NZS 61347-1, AS/NZS 61347-2-13;			
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC			
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25℃ / 70% RH			
	EMC EMISSION	Parameter	Standard	Test Level/Note	
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 17743	-----	
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 17743	-----	
		Harmonic Current	BS EN/EN61000-3-2 , GB17625.1	Class C @load≥50%	
		Voltage Flicker	BS EN/EN61000-3-3	-----	
		BS EN/EN61547			
	EMC IMMUNITY	Parameter	Standard	Test Level/Note	
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact	
		Radiated	BS EN/EN61000-4-3	Level 2	
		EFT/Burst	BS EN/EN61000-4-4	Level 2	
		Surge	BS EN/EN61000-4-5	Level3, 1KV/Line-Line	
		Conducted	BS EN/EN61000-4-6	Level 2	
		Magnetic Field	BS EN/EN61000-4-8	Level 2	
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	70% residual voltage for 10 period, 0% residual voltage for 0.5 periods	
OTHERS		KNX	Certified protocol		
	FLICKER Note.8	PstLM ≤ 1, SVM ≤ 0.4			
	MTBF	3949.8 K hrs min. Telcordia SR-332 (Bellcore) ; 338.5 Khrs min. MIL-HDBK-217F (25℃)			
	DIMENSION	147*40*32mm,107*40*32mm (L*W*H)			
	PACKING	141.6g; 60pcs/9.5Kg/0.58CUFT(for blank type); 160g; 50pcs/9Kg/0.57CUFT(for S-type)			
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25℃ of ambient temperature. 2. Output hiccups under no-load condition. 3. Please refer to "DRIVER METHODS OF LED MODULE". 4. De-rating may be need under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 5. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 6. Efficiency is measured at 500mA/50V output set by ETS database. 7. Standby power consumption is measured at 230VAC. 8. Flicker is measured at full load with LED modules. 9. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 10. For XLC(except -S) series: RCM is on a voluntary basis and meets relevant IEC or AS/NZS standards complying with AS/NZS 4417.1. For XLC-S series: RCM is on a voluntary basis. Non IC classification Independent LED control gear is not suitable for residential installations. 11.This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (C) point (or TMP, per DLC), is about 70℃ or less. 12. The ambient temperature de-rating of 3.5℃/1000m with fanless models and 5℃/1000m with fan models for operating altitude higher than 2000m(6500ft). 13. For more information, please contact with MEAN WELL sales. ※Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx				

BLOCK DIAGRAM

Fosc : 90KHz

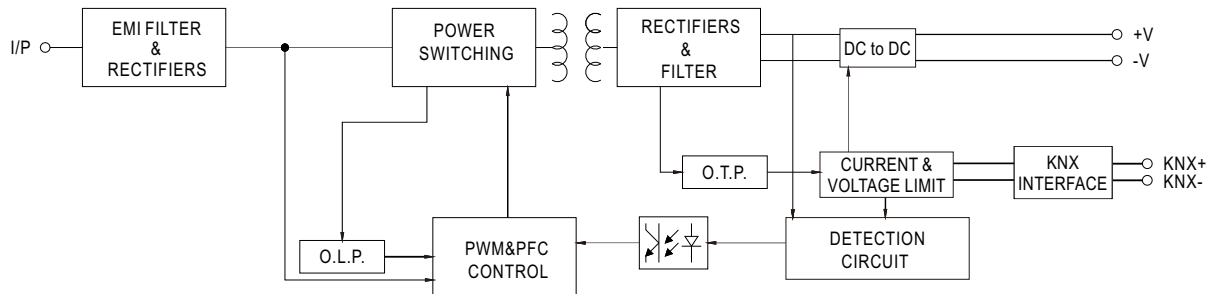


DRIVING METHODS OF LED MODULE

※ I-V Operating Area

◎ XLC-25-H-KN

For 25W application

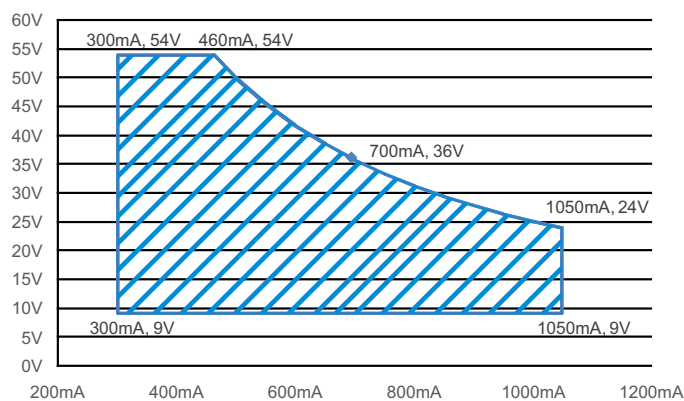

CONSTANT POWER TABLE

XLC-25-KN is a multiple-stage constant power driver, selection of output current through Database.

Vo	Io	Vo	Io
9~54V	300mA(Default)	9~36V	700mA
9~54V	350mA	9~33V	750mA
9~54V	400mA	9~31V	800mA
9~50V	450mA	9~29V	850mA
9~50V	500mA	9~28V	900mA
9~45V	550mA	9~26V	950mA
9~42V	600mA	9~25V	1000mA
9~38V	650mA	9~24V	1050mA


DIMMING OPERATION

※ KNX interface

- Apply KNX Bus cable between KNX+ and KNX-
- The application program(database) can be downloaded via Online Catalogs from ETS or via <http://www.meanwell.com/productCatalog.aspx>


Parametrization options	Description
Device Setting	•Select current level •Select model •Behavior bus power up
Parameter Setting	•Basic Setting •normal Dimmer, staircase light •switch function •relative dimming function •absolution dimming function •Feedback Setting •dimming value report •on/off state report •lamp failure report •Lock function
Scenes	•Learn scene •scene1~scene32
Automatic function	•Automatic function1~4
operating hours	•Counting of operating hours •Constant light output(CLO) •Life time pre-warning
Power consumption	•Voltage, current, power feedback •Energy consumption feedback
Temperature Measurement	•customize the alarm temperature •Send temperature report cyclically
Auto-dimming over time	•Optional gradient dimming
Correction characteristic	•Correction by lux measured value(lux)
Push Dim Port	•Push dim •AC monitor

※ CONSTANT LIGHT OUTPUT

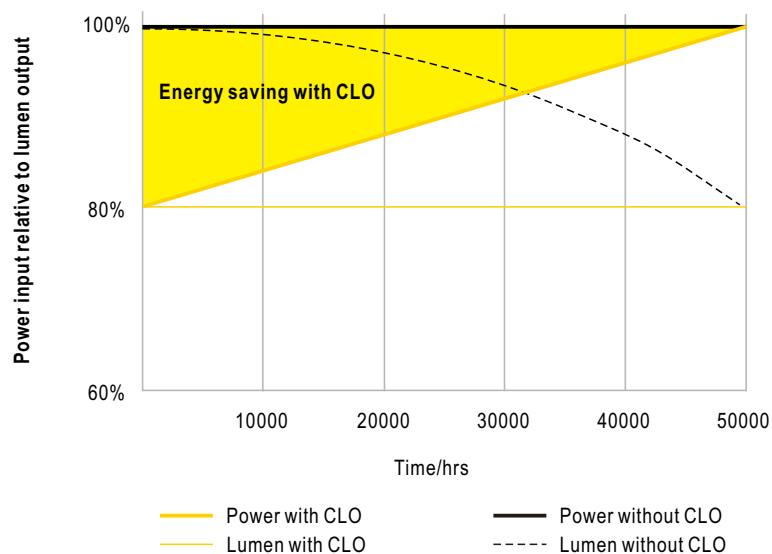


※ PUSH dimming or AC/DC input monitor(Primary side)

◎ PUSH dimming

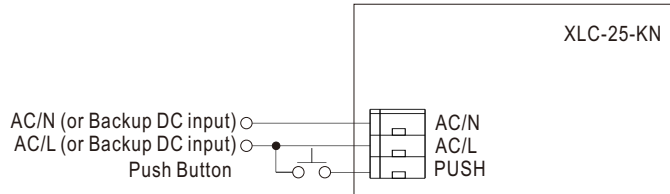


- KNX bus need to be connected when using PUSH Dimming
- The detailed function of PUSH dimming, please refer to the database.
- The maximum length of the cable between the push button and driver is 20 meters.
- The mechanical push button can be connected only between the PUSH terminal, as displayed in the diagram, and AC/L (in brown or black); It will not function properly if it is connected to AC/N.
- In case the PUSH dimming is set locally, up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button.
- In case the PUSH dimming is set independently via ETS, the number of drivers is done through group address and determined by the ETS project designer.

◎ AC/DC input monitor

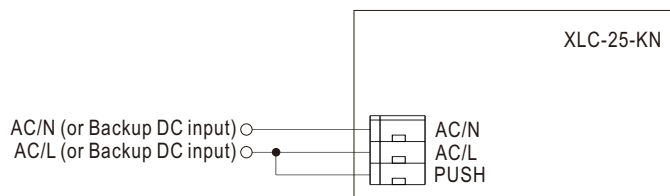


- KNX bus need to be connected when using AC/DC input monitor
- The detailed function of AC/DC input monitor(emergency lighting), please refer to the database and instruction manual.

OUTPUT LOAD vs TEMPERATURE

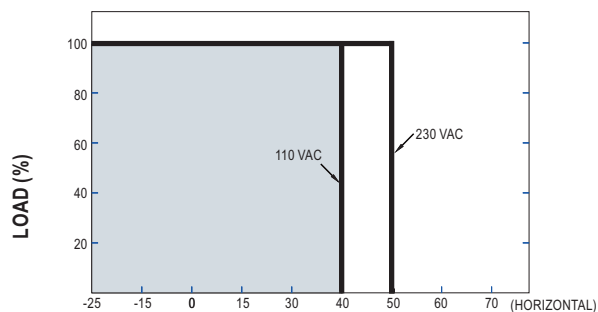


AMBIENT TEMPERATURE, Ta (°C)

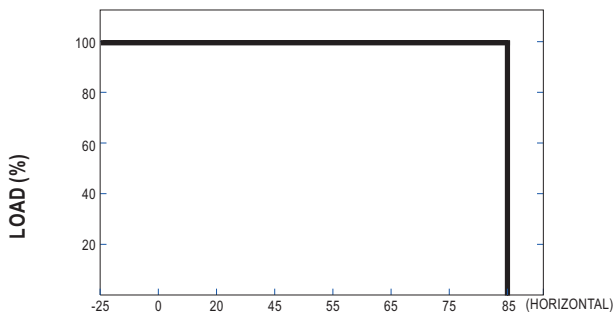

Tcase (°C)


STATIC CHARACTERISTIC

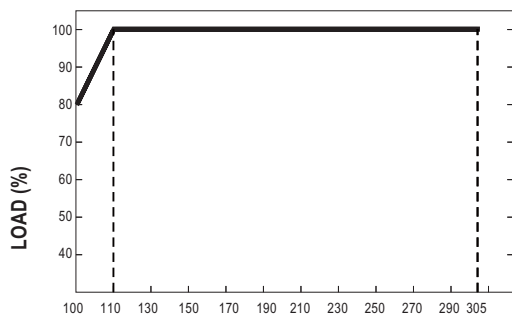

INPUT VOLTAGE (V) 60Hz



※ De-rating is needed under low input voltage.

LIFE TIME

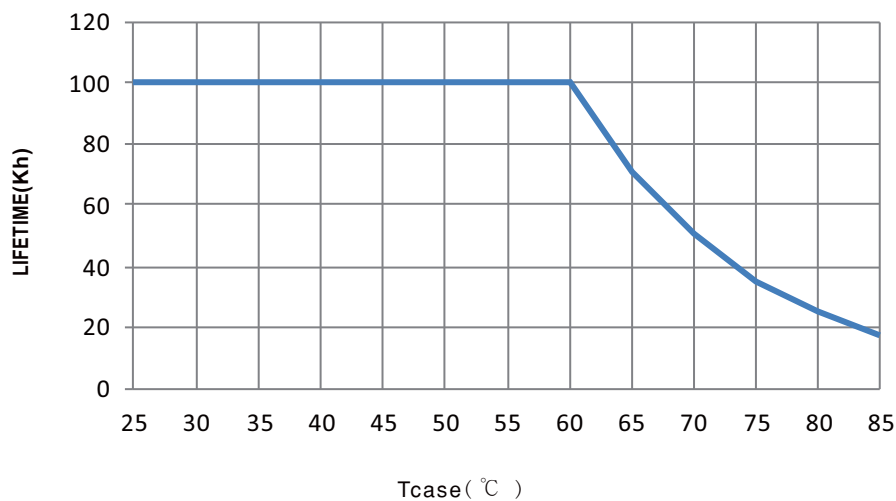



TOTAL HARMONIC DISTORTION (THD)

※ XLC-25-H-KN, T_{case} at 75°C

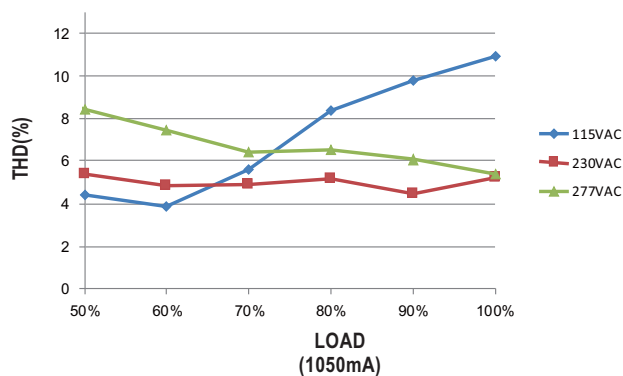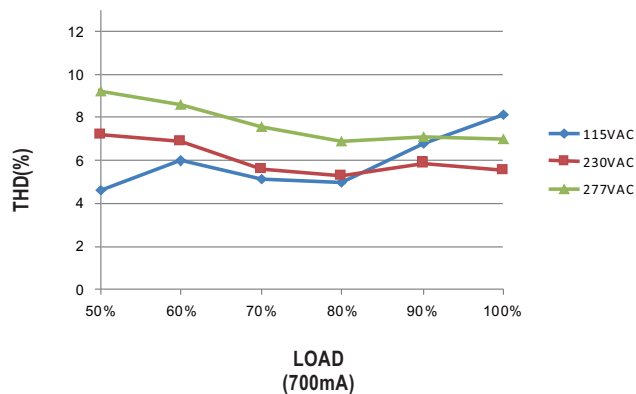

POWER FACTOR (PF) CHARACTERISTIC



※ XLC-25-H-KN, T_{case} at 75°C

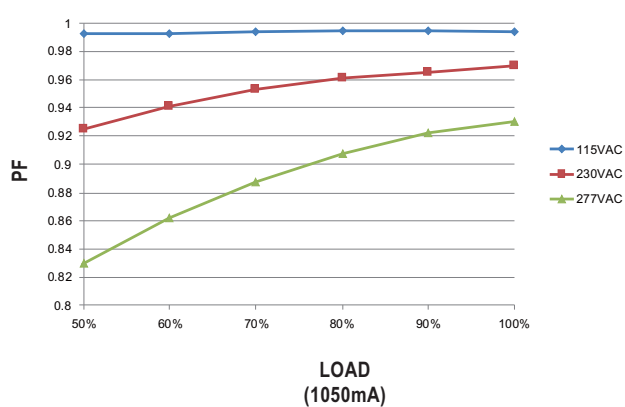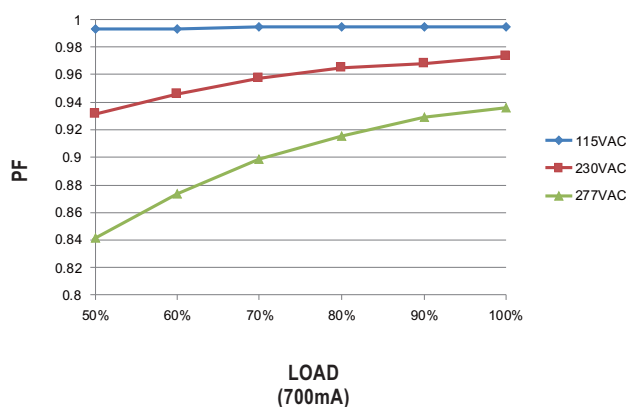

EFFICIENCY vs LOAD

XLC-25-KN series possess superior working efficiency that up to 88% can be reached in field applications.

※ XLC-25-H-KN, T_{case} at 75°C

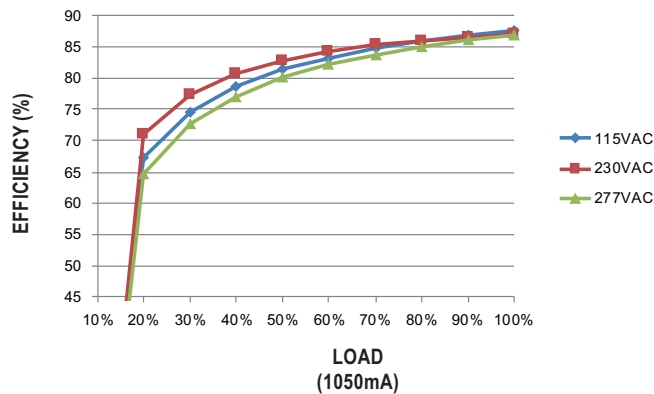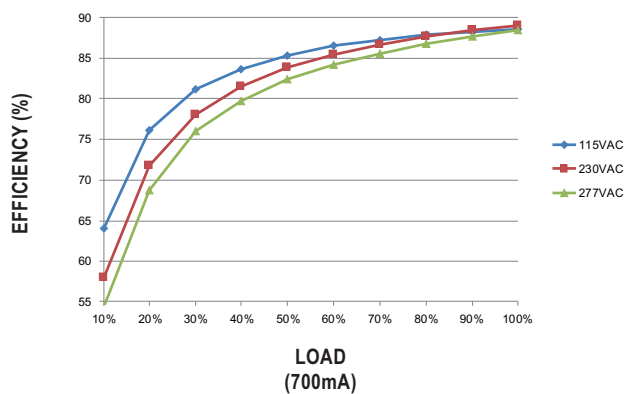


MECHANICAL SPECIFICATION

Case No.XLC-25

Unit:mm

Tolerance:±1

※ XLC-25-KN Built-in Type

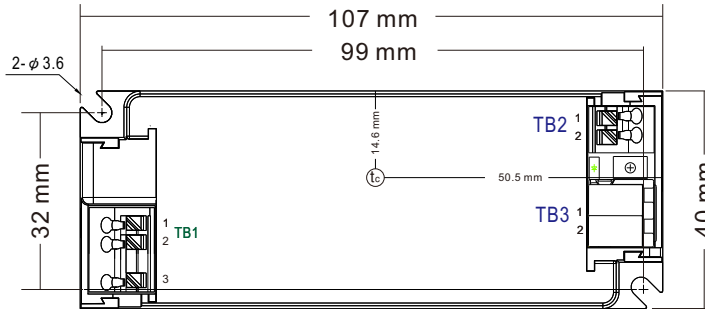

※ Terminal Pin No. Assignment(TB1)

Pin No.	Assignment
1	AC/N
2	AC/L
3	PUSH

※ Terminal Pin No. Assignment(TB2)


Pin No.	Assignment
1	+V
2	-V

※ Terminal Pin No. Assignment(TB3)

Pin No.	Assignment
1	KNX+
2	KNX-

TB1 wiring:

8-9mm



□ 0.5-1.50mm²



TB2 wiring:

8-9mm



□ 0.5-1.50mm²


Item	Order No.	Quantity(MOQ/1Bag)
Strain-relief cap	1**3XLC-SET	50pcs (2pcs 1 set)

※ XLC-25-H-KNS Independent Type

Case No.XLC-25-S

Unit:mm

Tolerance:±1

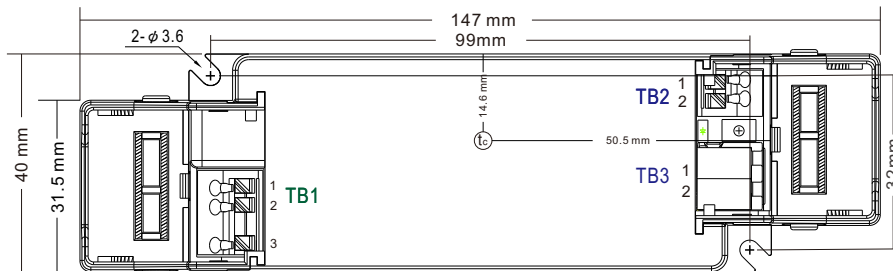

※ Terminal Pin No. Assignment(TB1)

Pin No.	Assignment
1	AC/N
2	AC/L
3	PUSH

※ Terminal Pin No. Assignment(TB2)


Pin No.	Assignment
1	+V
2	-V

※ Terminal Pin No. Assignment(TB3)

Pin No.	Assignment
1	KNX+
2	KNX-

TB1 wiring:

8-9mm



□ 0.75-1.5mm²



TB2 wiring:

8-9mm



□ 0.5-1.5mm²

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>