
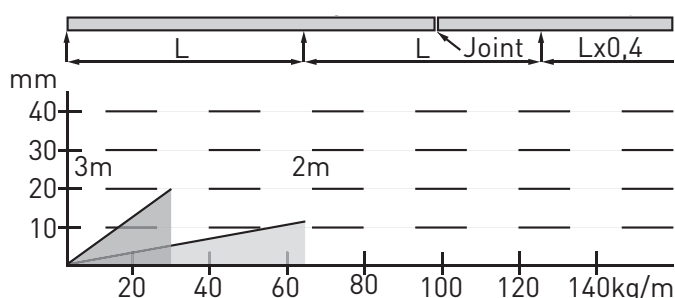


Cable ladder with lower weight!

We are now expanding our range of cable ladders with an additional model. Since many electricians suffer from lifting things above shoulder height, we have now developed a ladder with thinner material. With 30% less weight and a load capacity that is sufficient for most installations, there are only advantages.

The cable ladder can be installed indoors in environmental class C2

Width	Art.no (3m)	Art.no (6m)
200 mm	MP-102LS	MP-102LS6
300 mm	MP-103LS	MP-103LS6
400 mm	MP-104LS	MP-104LS6
500 mm	MP-105LS	MP-105LS6
600 mm	MP-106LS	MP-106LS6

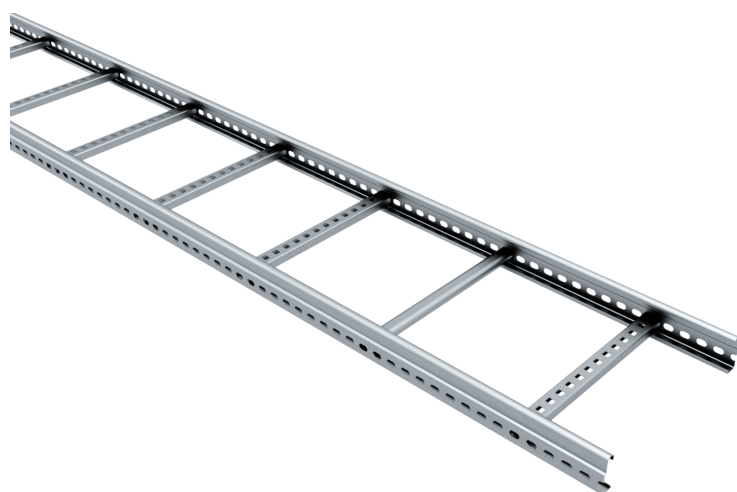

LS

Cable ladders with the side profile in this design are called LS, and the perforated side allows for the mounting of various accessories.

LS is available in two different lengths to meet different needs, such as transport in tight spaces or larger halls where longer cable ladders may be preferred.

If using a telecommunication channel in the cable ladder, it can be fixed under the edge of the side profile.

When using cables with a maximum diameter of 20 mm, up to 97% of the ladder's width can be utilized.

MPbolagen

MP bolagen Industri AB
Box 3, 574 21 Vetlanda
tfn 0383 76 36 00

info@mpbolagen.se
www.mpbolagen.se