


Vinyl

Aa Aa Aa Aa Aa Aa


Temperature rating: -40°C to 80°C

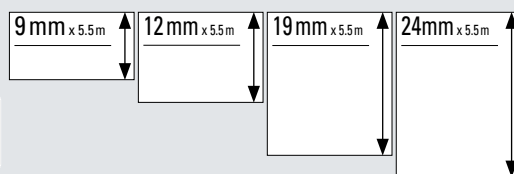

Permanent Polyester

Aa Aa Aa


Temperature rating: -40°C to 150°C*

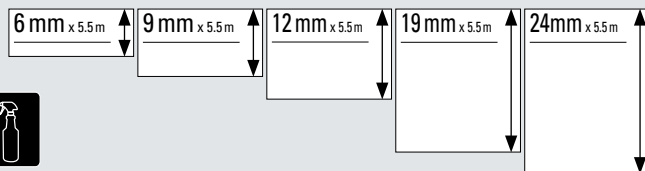

Flexible Nylon

Aa Aa


Temperature rating: -40°C to 60°C

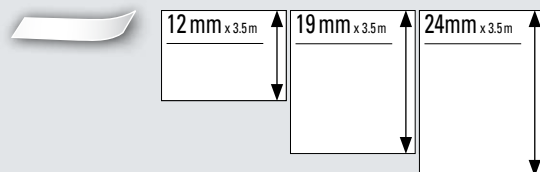

Heat-Shrink Tube

Aa Aa

Temperature rating: Up to 125°C

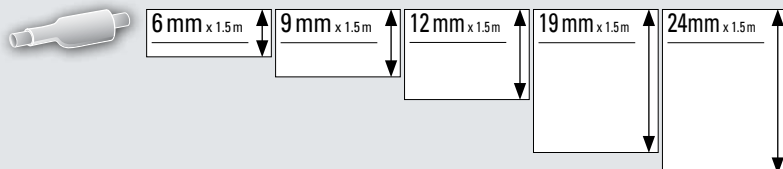

DYMO® nylon straps for Rhino

Flexible nylon tape specially designed for marking cables and wires. This tape has high adhesion and flexibility. Can also be used in environments where the belts are exposed to dirt and oil.

Temperature resistance: -18° to +120°C



DYMO® polyester tapes for Rhino

Permanent polyester can be flat, rough on a variety of very rough surfaces are used and is particularly resistant to solvents and chemicals. UL recognized to UL 969.

Temperature resistance: -18° to +120°C



Colour	6 mm	9 mm	12 mm	19 mm	24 mm	Price
ABC	-	-	18488	18489	1734524	xx,xx
ABC	-	-	18490	18491	1734525	xx,xx

Colour	6 mm	9 mm	12 mm	19 mm	24 mm	Price
ABC	1805442	18482	18483	18484	1734523	xx,xx
ABC	1805440	18508DMO	622289	622290	-	xx,xx

DYMO® heat shrink tubing for Rhino

Heat shrink tubing is a tack-free yet permanent polyolefin solution that allows you to identify and protect your wires and cables at the same time. The tubing is fire retardant and has a 3:1 shrink ratio. Meets the following standards MIL-M-8153, MIL-STD-202G, SAE-DTL-23053/5 (Class 1/3) & UL recognized to UL 224.

Temperature resistance: -55° C bis 135°C



Colour	6 mm	9 mm	12 mm	19 mm	24 mm	Price
ABC	18051	18053	18055	18057	1805443	xx,xx
ABC	18052	18054	18056	18058	1805444	xx,xx

DYMO® vinyl tapes for Rhino

Colored vinyl combines flexibility, a strong adhesive and high chemical resistance, making this label ideal for many applications where color is desired. UL recognized to UL 969.

Temperature resistance: -40°C to 80°C



Colour	6 mm	9 mm	12 mm	19 mm	24 mm	Price
ABC	-	18443	18444	18445	1805430	xx,xx
ABC	-	-	18432	18433	1805431	xx,xx
ABC	-	-	18435	18436	-	xx,xx
ABC	-	-	1805416	1805422	-	xx,xx
ABC	-	1805437	1805435	1805436	1805432	xx,xx
ABC	-	-	1805243	1805417	-	xx,xx
ABC	-	-	1805414	1805420	-	xx,xx



DYMO® RHINO Industrial Labels

For use with Rhino series

- IND Vinyl**
Ideal for both indoor and outdoor applications. Available in the widest range of colors that meet OSHA, ANSI and ISO colour standards.
- IND Permanent Polyester**
Professional polished finish ideal for panels, blocks, faceplates, shelves, bins, beams and more.
- IND Heat Shrink**
For high-end cable identification. A 3:1 shrink ratio helps ensure a secure fit on wires and cables. UL recognised as a component to UL 224, RoHS compliant, meets MIL-STD- 202G, MIL-81531 & SAE-DTL 23053/5 (Class 1&3).
- IND Flexible Nylon**
Tear-proof material for labelling wires, cables and rounded surfaces.

UL recognised component to UL 969. RoHS compliant.



Look out for DYMO® FSC Mix Certified Products

Certificate : SGSCH-COC-041289