


Industrial Heating Systems (IEC / ATEX)


SELECT YOUR CONNECTIONS KITS

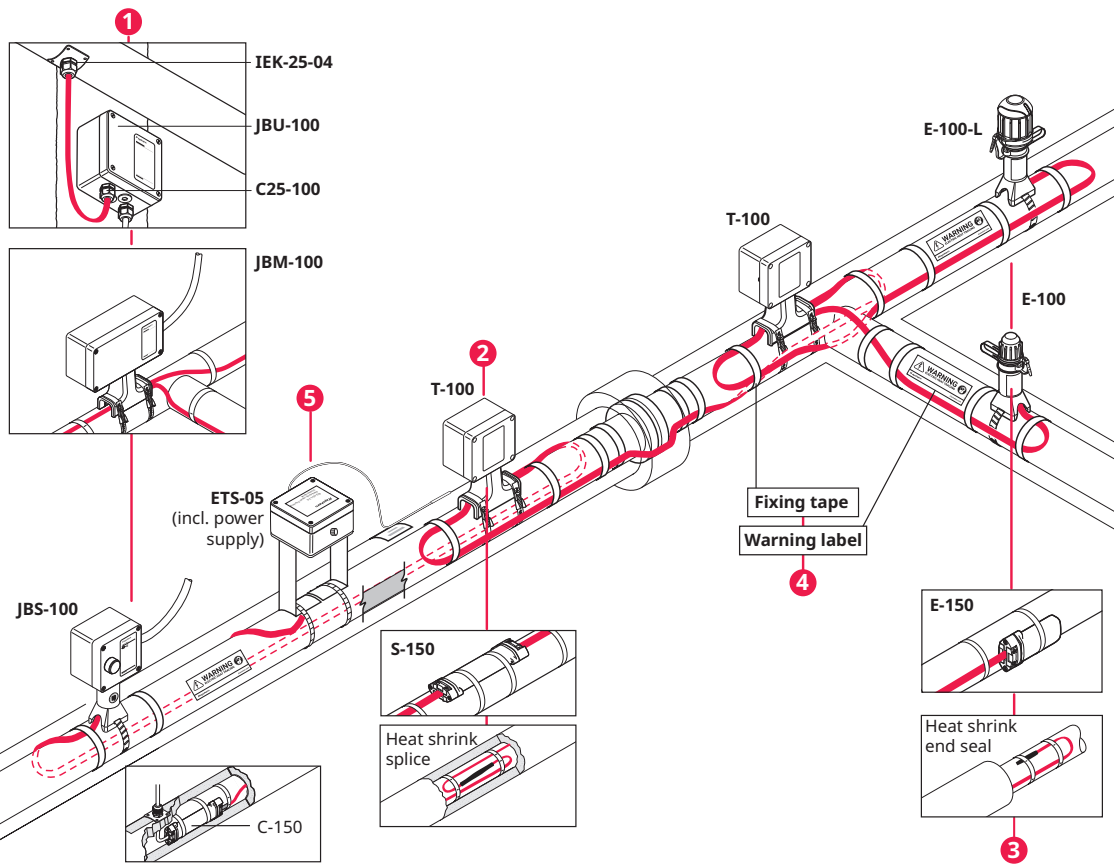

1	Power connections	Description
	Pipe-mounted junction box, for 1 circuit. Option: light, earthplate	JBS-100 (-E, -EP, -L-E, L-EP)
	Pipe-mounted junction box, for 3 circuits. Option: light, earthplate	JB-M-100 (-E, -EP, -L-E, L-EP)
	Modular junction box, for 3 circuits. Option: light, earthplate	JBU-100 (-E, -EP, -L-E, L-EP)
	Modular junction box with electronic thermostat, for 1 circuit. Option: light, earthplate, 199 or 499°C, alarm relay (-A)	ETS-05 (-L2-E, -L2-EP, -H2-E, H2-EP)
	Modular non hazardous junction box, for 1 circuit	JB-NH-2
	Modular non hazardous junction box, for 3 circuits	JB-NH-4
	Low profile power connection for 1 circuit	C-150-E
	Cold applied connection kit to modular junction box	C25-100
	Other power connections and kits	Check product catalogue
2	Splice/Tee connections	Description
	Pipe-mounted tee/splice box	T-100
	Low profile splice	S-150
	Heat shrink splice connection	S-20 (BTV, QTVR), S-40 (XTVR, HTV, VPL)
3	End seals	Description
	Pipe-mounted end seal, Option: light	E-100-E(-L)
	Low profile end seal	E-150
	Heat shrink end seal	E-20 (BTV, QTVR), E-40 (XTVR, HTV, VPL)
	Low profile non-hazardous end seal	E-02-AL (BSA)
	Low profile non-hazardous power connection/splice, end seal	CSE-05-DR (BSA)
4	Accessories	Description
	Glass fiber fixing tape. For (non-stainless) steel pipes and install >5°C	GT-66
	Glass fiber fixing tape. For stainless steel pipes, and install <5°C	GS-54
	Aluminium tape. Heat transfer aid	ATE-180
	Insulation entry kit, pipe-mounted	IEK-25-PIPE
	Insulation entry kit, mounted on cladding	IEK-25-04
	Support bracket	SB-100, SB-101, and other
	Warning label (1 per 5 m pipe), English	LAB-I-01
	Other labels and accessories	Check product catalogue

5 Controls	Description
Surface sensing thermostat, mechanical	Raystat EX-02
Surface sensing thermostat, electronic	ETS-05 (-L2-E, -L2-EP, -H2-E, H2-EP)
Field mounted electronic controller	Elexant 4010i
Field mounted electronic controller	Elexant 5010i
Ambient sensing thermostat, electronic	ETS-05 (-A2-E)
Panel mounted electronic controller	Elexant 4020i
Panel mounted electronic controller	NGC-30
Panel mounted electronic controller	NGC-40
Other controls available	Check product catalogue

Typical continuous operating temperature

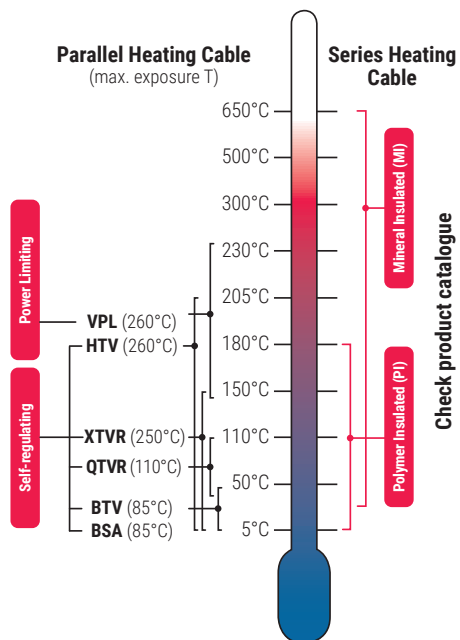

Non-Hazardous Self-Regulating Cable - BSA

- 65°C Continuous operating temperature
- 85°C maximum intermittent exposure (1000 h)
- Power output (at 10°C): 10, 23 W/m

Self-Regulating Cable - BTV

- 65°C Continuous operating temperature
- 85°C maximum intermittent exposure (1000 h)
- T-rating: T6
- Power output (at 10°C): 9 - 16 - 25 - 29 W/m

Self-Regulating Cable - QTVR

- 110°C Continuous operating temperature
- 110°C maximum intermittent exposure (1000 h)
- T-rating: T4
- Power output (at 10°C): 38 - 51 - 64 W/m

Self-Regulating Cable - XTVR

- 150°C Continuous operating temperature
- 250°C maximum intermittent exposure (2000 h)
- T-rating: T3 (20XTVR2-CT up to Max 240 VAC)
- Power output (at 10°C): 9 - 16 - 25 - 32 - 38 - 48 - 64 W/m

Self-Regulating Cable - HTV

- 205°C Continuous operating temperature
- 260°C maximum intermittent exposure (2000 h)
- T-rating: T3 (T2 for 20HTV)
- Power output (at 10°C): 9 - 16 - 25 - 32 - 38 - 48 - 64 - 92 W/m

Power Limiting Cable - VPL

- Continuous operating temperature up to 230°C (per design)
- Maximum intermittent exposure temperature: 260°C
- T- rating: per design
- Power output (at 10°C): 15 - 30 - 45 - 61 W/m

Europe, Middle East, Africa

Tel +32.16.213.502
info@chemelex.com

chemelex
excellence is everything

©2025 Chemelex. All Chemelex marks and logos are owned or licensed by Chemelex Europe GmbH or its affiliates. All other trademarks are the property of their respective owners. Chemelex reserves the right to change specifications without notice.

RAYCHEM-LC-EU1551-QuickReferenceSheetEMEA-EN-2504

Raychem Tracer Pyrotenax Nuheat

chemelex.com