



Direct Infrared Radiant Heater G-Cera



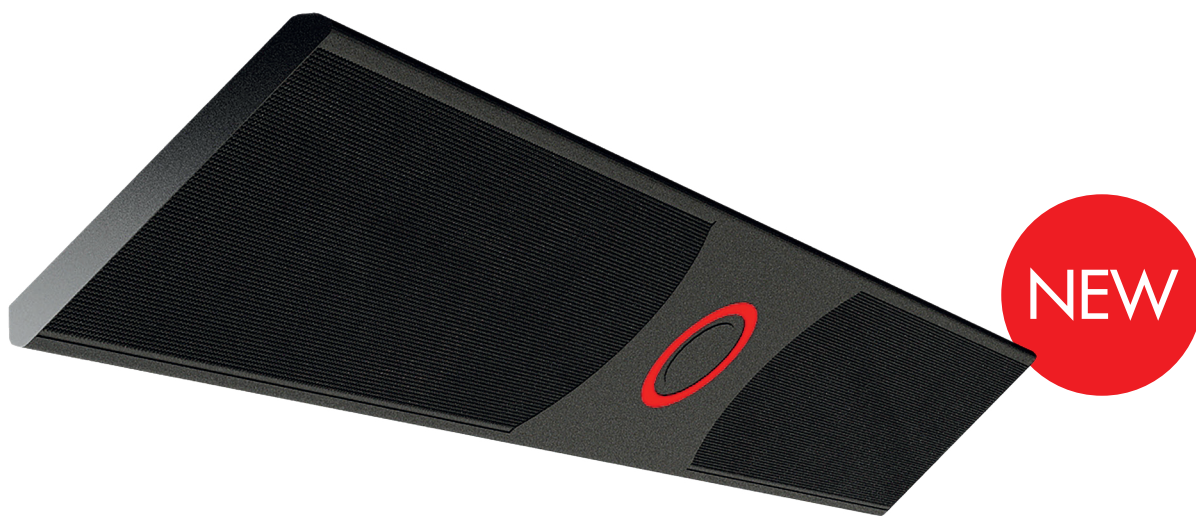


Installation for indoor and outdoor

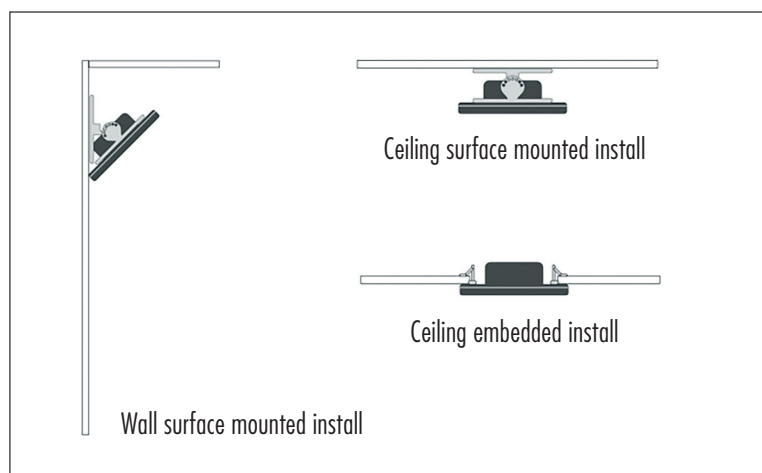

For a cozy warming experience and efficient heat distribution

Innovative technical solutions for material construction:

- The panel is a microcrystalline ceramic with a $\text{Li}_2\text{O-Al}_2\text{O}_3\text{-SiO}_2$ structure system.
- Designed with a double-chamber pipe insulation frame structure

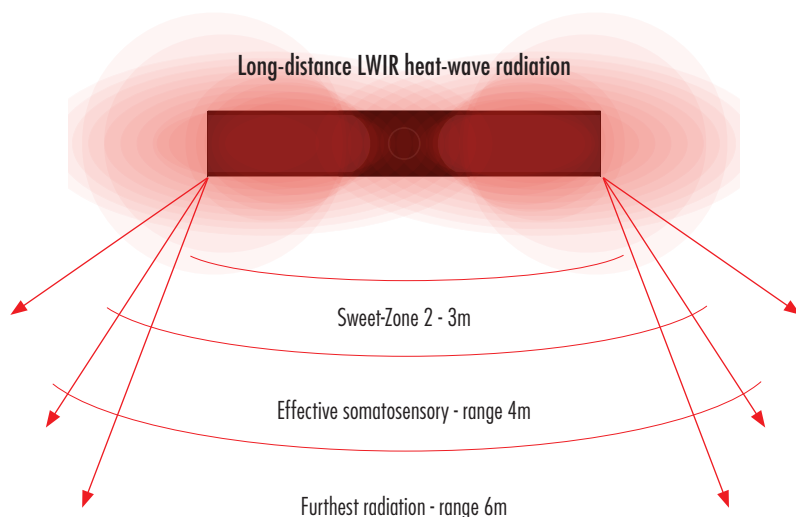

- Radar control
- E-type temperature sensor
- Remote control / App control



Length(mm)	Width (mm)	Thickness (mm)	Input (VAC)	Rated input (VAC)	Rated Heat Power	Working temperature	Suggested indoor area	Suggested outdoor area
1200	210	20	85 - 265V	230V - 50Hz	2400W	400C	max 40m ²	max 20m ²
660	210	20			1200W		max 20m ²	max 10m ²