




Pumping solutions for hygienic production processes

WANGEN VARIO TWIN NG

MAX.
DELIVERY
RATE
m³/h | 10
MAX.
PRESSURE
bar | 25
MAX.
PASSAGE
mm | 32

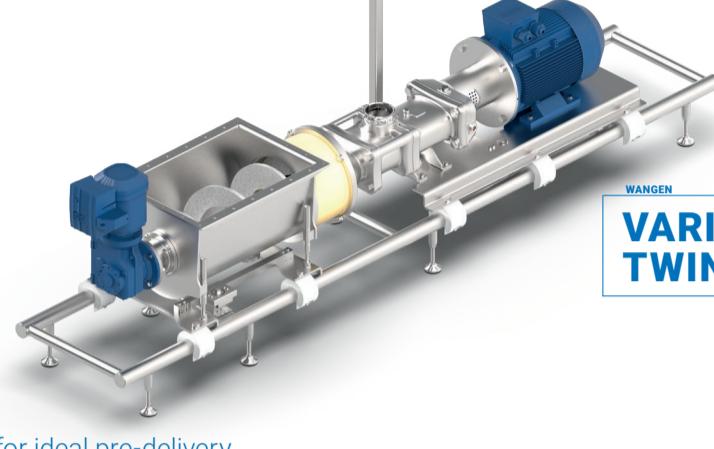

WANGEN
**VARIO
TWIN NG**

FEATURES

- Twin screw pump
- "Coreless" screw for ideal pre-delivery
- Feed unit for the gentle pumping of high-viscosity, non-free-flowing media

WANGEN KL-RF

MAX.
DELIVERY
RATE
m³/h | 26
MAX.
PRESSURE
bar | 48
MAX.
PASSAGE
mm | 81



WANGEN
KL-RF

FEATURES

- Hopper feed pump
- Capable of heated or cooled operation
- Long service life, gentle pumping

WANGEN TWIN NG

MAX.
DELIVERY
RATE
m³/h | 200
MAX.
PRESSURE
bar | 25
MAX.
PASSAGE
mm | 41



WANGEN KL-RL

MAX.
DELIVERY
RATE
m³/h | 26
MAX.
PRESSURE
bar | 48
MAX.
PASSAGE
mm | 82



FEATURES

- Hopper feed pump
- Low-maintenance, automatic operation is possible
- Long service life, wide viscosity range

Medium-specific, gentle on the product and reliable.



FEED MEDIA

- Confectionery products, such as chocolate, marzipan or waffle mixture
- Dairy products, such as cheese, milk or yoghurt
- Drinks, including fruit juice, beer or wine
- Syrup or similar high-viscosity media
- Meat, for example in the form of sausage meat or meat filling
- Meat substitute products
- Fruit, including apples, pears, raspberries
- Vegetables, such as broccoli, melons or bananas
- Bakery products, including biscuit mixture, all kinds of leavened dough, whole grain dough
- Ice cream, tofu, soya oil, butter etc.
- Creams, ointments, lotions, soap, shampoo, shower gels
- Paints, varnishes, adhesives, binding agents, glue




FEED MEDIA



The optimum pumping solution for every medium.

OUR PROMISE

- All kinds of media (lumpy, viscous, shear-sensitive or highly tempered etc.) are pumped to their destination with low pulsation
- Ease of cleaning and maintenance (Cleaning (CIP) and Sterilisation in Place (SIP))
- Exacting hygiene standards (EHEDG certification is possible)
- Spare parts & service
- Many years of experience and development

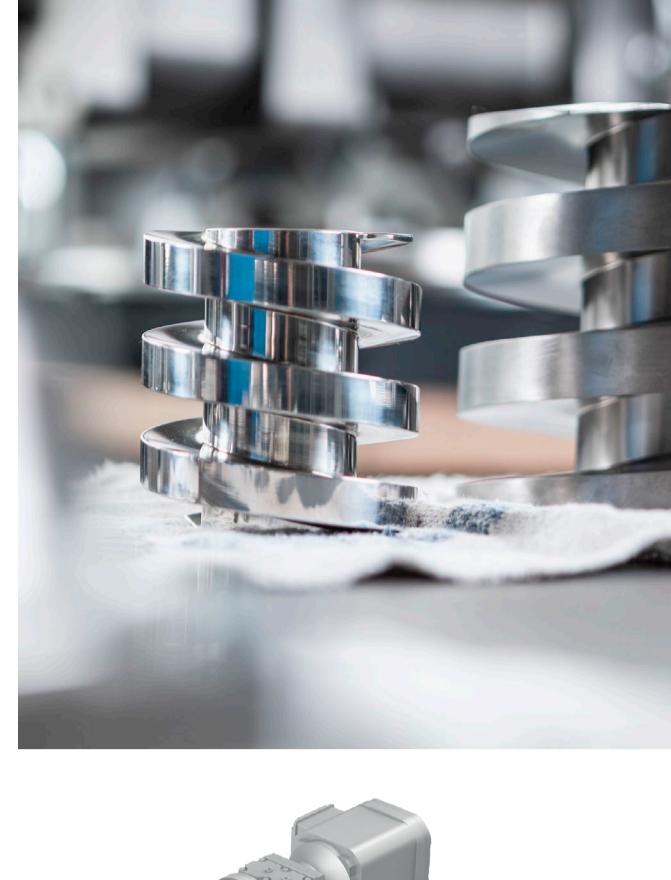

WANGEN KL-SL

MAX.
DELIVERY
RATE
m³/h | 50
MAX.
PRESSURE
bar | 24
MAX.
PASSAGE
mm | 88



FEATURES

- Self-priming pump
- Operates heated or cooled, over long distances and differences in height
- Low-pulsation, continuous pumping
- CIP

WANGEN HYLINE

MAX.
DELIVERY
RATE
m³/h | 3.9
MAX.
PRESSURE
bar | 24
MAX.
PASSAGE
mm | 24



FEATURES

- Progressing cavity pump
- For demanding, hygienic pumping and metering processes

WANGEN KB-SL

MAX.
DELIVERY
RATE
m³/h | 2.6
MAX.
PRESSURE
bar | 24
MAX.
PASSAGE
mm | 24



FEATURES

- Self-priming pump for the food industry
- Minimal dead space and stagnation space design
- Can be adapted with one or two tangentially inclined cleaning connections

WANGEN MX

MAX.
DELIVERY
RATE
m³/h | 64
MAX.
PRESSURE
bar | 80
MAX.
PASSAGE
mm | 76



FEATURES

- Self-priming pump for high-viscosity to set media with a high solids content
- With EvenWall® technology
- Available as an immersion pump

Pumpenfabrik Wangen GmbH
Simoniustrasse 17
88239 Wangen im Allgäu
Germany

Technical advice: +49 7522 997-0
Service hotline: +49 7522 997-997
Spare parts: +49 7522 997-896

Part of Atlas Copco Group

wangen.com

© 2025 Pumpenfabrik Wangen GmbH. Subject to errors and technical modifications. 07.2025 Nr. ED600