



DRAFTMAX

Downdraft and backdraft workbench
extracts fumes and dust effectively



DO YOU REMOVE WELDING FUMES AND GRINDING DUST EFFECTIVELY?

We do. Proper extraction and filtration of fumes and dust in a welding school or workshop significantly contributes to a better work environment. Whether you extract welding fumes at the source, through downdraft or backdraft workbenches, extraction hoods or a general ventilation and filtration system, you always need to be in control.

Plymovent has 40 years of experience, specialising in the extraction and filtration of welding fumes. We offer high-quality systems that remove welding fumes and dust directly from the breathing zone of the welder and keep the background concentration levels within the legal limits, in accordance with international guidelines.

All our extraction and filtration products are designed for the metalworking industry to protect the welders and people working nearby. The result: better work performance, increased productivity and less absence due to illness.

Plymovent's downdraft and backdraft workbench, DraftMax, is a safe and effective workplace. It is a combination of a workbench and an extraction/filtration system. The compact unit can be placed inside a welding booth, but also in a corner or connected to ductwork. It is suited for many applications, like welding, grinding and plasma cutting.

HOW DOES IT WORK?

The extraction system removes fumes and dust directly from the breathing zone of the welder through the working surface and/or optional backdraft panel. The backdraft kit is highly recommended if working with a heat source, like stainless steel. In this case fast-rising welding fumes can only be captured effectively by a downdraft and backdraft combination. The three-way spark arrester underneath the work surface ensures safety by preventing sparks from reaching the filter cartridges.

Inside the unit, filtration takes place through two oval filter cartridges with a total filter surface of 52 m². They cover a large filter surface, resulting in a long filter lifespan. This means less maintenance and it reduces all-over operational costs.

A HEPA kit can be added if recirculation is allowed (depending on local regulations). Recirculation reduces the need for ventilation with outside air. Expensively heated or cooled air stays in the workshop, reducing both general and technical costs and the impact of operations on the environment.

EASY TO OPERATE

The DraftMax was developed with user-friendliness in mind. Service and maintenance, like filter replacement and emptying the dust tray can be done from the front.

PLUG & PLAY MODELS

■ DraftMax Basic

This unit is recommended for light to moderate welding and grinding activities. With the large filter surface, the filter's efficiency is high and operational costs are low.

■ DraftMax Ultra

This unit is similar to the DraftMax Basic. In addition, cleaning starts automatically as soon as the fan is switched off. It also offers the possibility of an automatic start/stop device making the unit even easier to operate. This unit monitors the compressed air and pressure difference permanently to ensure optimum extraction.

SYSTEM SOLUTION

■ DraftMax Eco

This model features the integrated spark arrester, but no filter cartridges. DraftMax Eco is suited for ductwork. It has to be connected to an external fan and filtration system, such as Plymovent's SCS or MDB filtration unit.




FEATURES

- Safe: three-way spark arrester.
- Effective: powerful extraction including integrated fan.
- Efficient: large filter surface and long filter lifespan.
- Maintenance-friendly: can be carried out from the front.
- User-friendly operation.
- Low noise level: options down to 67 dB(A).
- Downdraft and optional backdraft for fast-rising fumes, such as welding fumes.

CODE COMPLIANT

The DraftMax Basic and Ultra units in combination with the optional HEPA kit are IFA W3 certified according to the European standard DIN EN ISO 15012-1 (2005). Welding fume class V3 confirms that certified DraftMax units are recommended for the separation of particles generated by welding of high-alloyed steel with a nickel and chromium content > 30%.

A combination of options can improve the extraction effectiveness of the DraftMax according to your needs. Due to local regulations some options are compulsory. For recommendations and advice, please contact Plymovent.

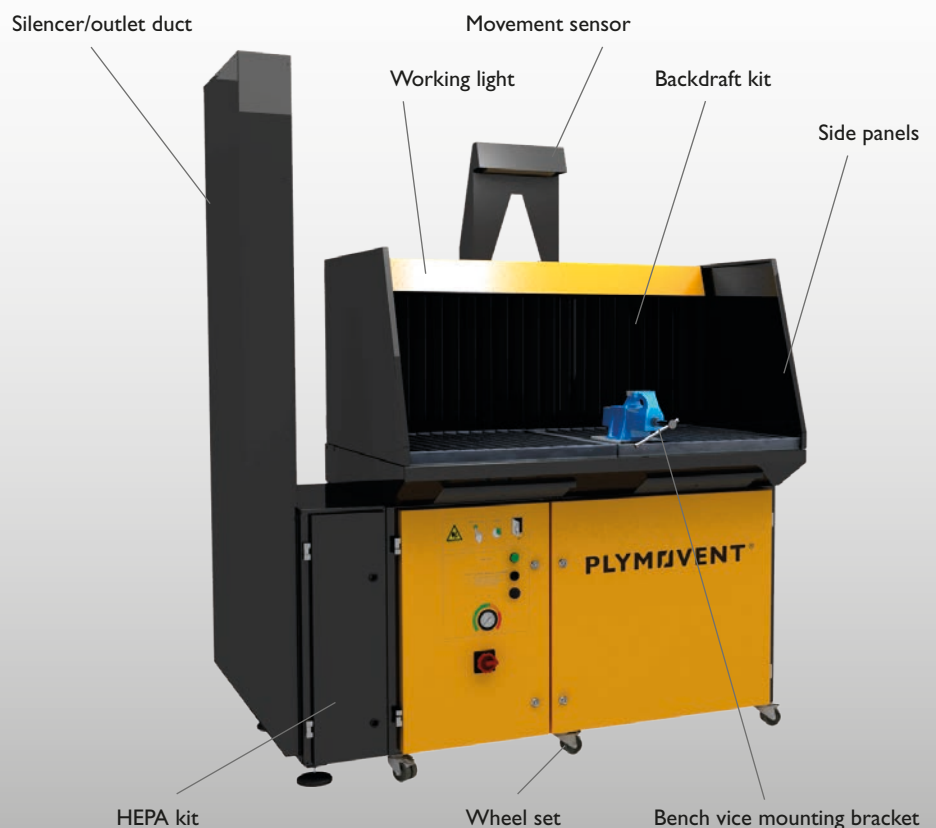

Options not shown: back panel, plasma cutting work grid, outlet connection plate, welding cable sensor and dust-free kit.



PLYMOVENT®

clean air at work

International Distributor Sales
Plymovent Group BV
Koraalstraat 9
1812 RK Alkmaar
The Netherlands

T +31 (0)72 5640 604
F +31 (0)72 5644 469
E export@plymovent.com

Your authorised Plymovent distributor:

PLYMOVENT OFFERS TOTAL SOLUTIONS FOR AIR CLEANING

For over 45 years Plymovent has gained market leading experience in the field of air cleaning. We not only have extensive knowledge of the extraction and filtration of welding fumes and oil mist in metalworking industries, we are also specialised in the removal of vehicle exhaust fumes.

*Plymovent cares about the air you breathe.
We offer products, systems and services which
ensure clean air at work, anywhere in the world.*

*We respect the environment and we deliver
high-quality products. Our expertise gained over
many years and our genuine commitment to
customer requirements enable us to provide
precisely the solutions you need.*