

# Earth-Rite® MULTIPOINT II

## Static Grounding System



Earth-Rite MULTIPOINT II Static Grounding System



To ground and monitor multiple items of equipment at points like multi drum loading stations and mixing stations, IBC loading stations and railcar loading gantries, a large number of conventional static grounding systems would be required to minimize the accumulation of static electricity. In addition to flammable liquid and gas operations, powder processing equipment that typically includes interconnected pipes, fluid bed dryers, hoppers and micronizers would require multiple grounding systems. With the Earth-Rite® MULTIPOINT II up to eight individual items of potentially isolated equipment can be ground monitored simultaneously with a single static grounding system.

The Earth-Rite MULTIPOINT II is an ATEX / IECEx / cCSAus certified static grounding system which indicates when equipment exceeds ground resistance levels outlined in recommended practice documents like IEC TS 60079-32-1 and NFPA 77.

The system consists of a hazardous area monitoring unit that contains eight pairs of red and green LED indicators that verify when the equipment at risk of static charge accumulation has a resistance of 10 Ohms or less to the plant's designated true earth grounding point.

For applications where ground monitoring indication is required at the point of operation (e.g. drum filling) local ground status indicator stations can be specified.

Each monitoring channel interfaces with it an individual volt free contact as standard. In addition to the 8 individual volt free contacts a group relay is provided so that multiple ground monitoring channels can be setup to provide a permissive / non-permissive condition to external equipment (e.g. PLCs, pumps, valves, sounders).


### Earth-Rite MULTIPOINT II applications include:

- > multiple railcar loading points
- > multiple drum / tote loading points
- > liquid / powder mixing and blending
- > powder conveying equipment
- > fluid bed dryers
- > silo / container filling and emptying
- > hoppers and dust collectors
- > powder micronizing, pulverising and grinding equipment

## Earth-Rite® MULTIPOINT II



The Earth-Rite MULTIPOINT II's monitoring unit contains 8 pairs of LED ground status indicators (red and green).

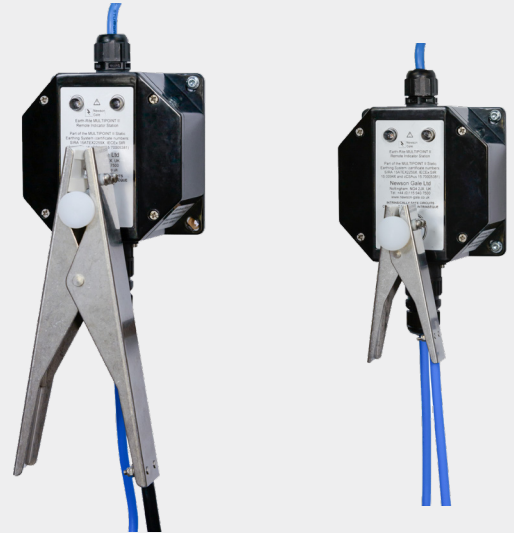

The Earth-Rite MULTIPOINT II's energy efficient remote indicator stations provide ground status indication for each individual channel. The attention grabbing high intensity GREEN LED pulses continuously when a positive ground connection is made.




The Earth-Rite MULTIPOINT II's 230 V/110 V AC power supply unit houses eleven (11) SP/DT volt free contacts. 8 of these interface with each monitored grounding channel, 2 provide the grouped channel function and 1 relay provides the fail-safe redundancy output function.




The Earth-Rite MULTIPOINT II's 4 way and 8 way marshalling junction boxes link the monitoring unit with the external ground connection points and external LED ground status remote indicator stations. The marshalling boxes can be supplied as GRP and stainless steel.

## Earth-Rite® MULTIPOINT II

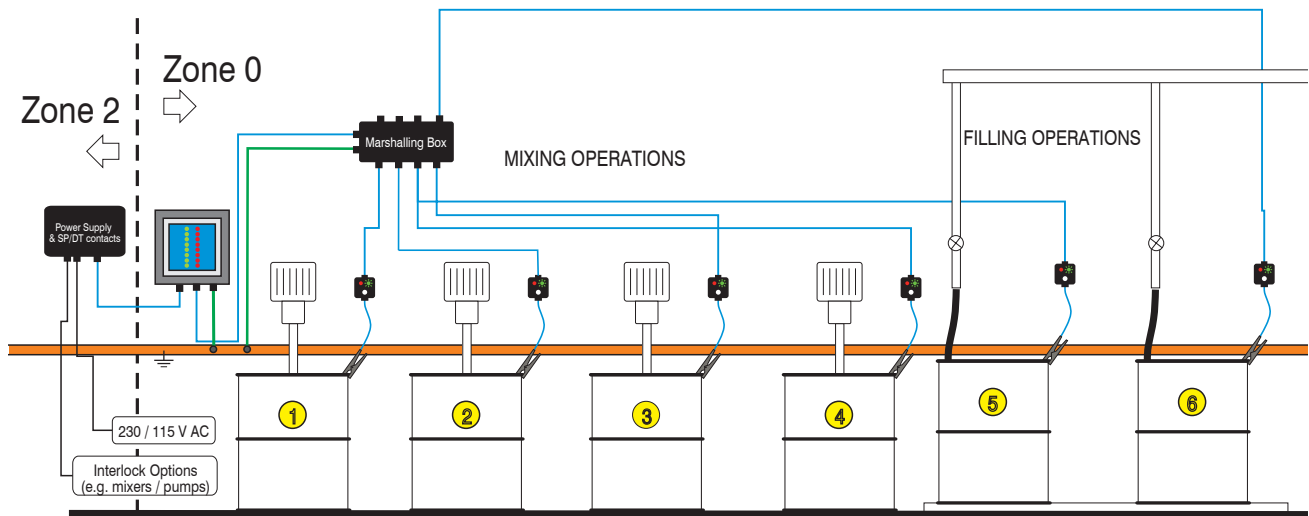

The Earth-Rite MULTIPOINT II's monitoring unit and power supply can be configured to ground and monitor a wide range of equipment. In this example the system is setup to ground four mixing stations (1 to 4) and two filling stations (5 and 6). Each mixer is interlocked with an individual relay corresponding to the equivalent ground monitoring channel. Channels 5 and 6 are grouped via the group relay so that if either drum is not grounded the pump feeding the filling station is shut down immediately, thereby mitigating the build up of static on the drums.

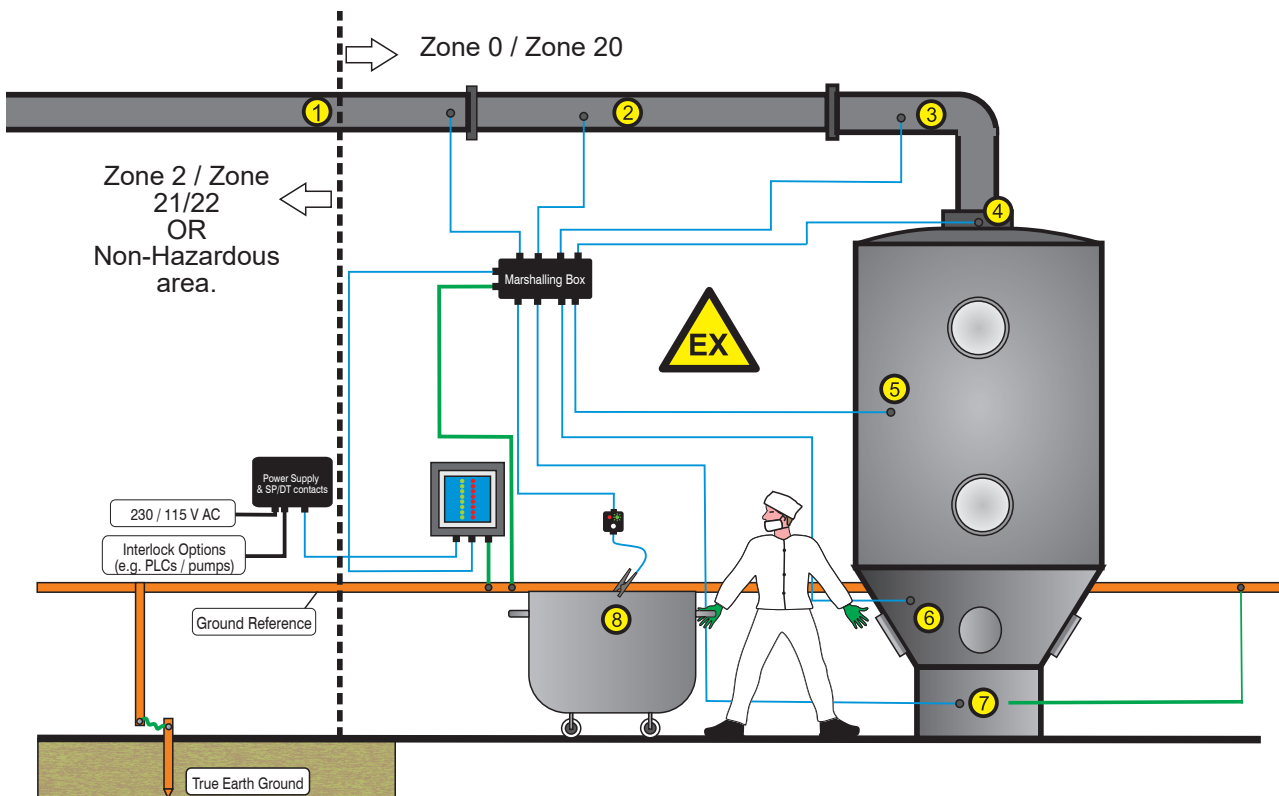

In this example the Earth-Rite MULTIPOINT II is configured to ground multiple interconnected components for a fluid bed dryer system. The marshalling box feeds seven channels out to seven permanent ground connection points [the connection points may be disconnected for routine cleaning, inspection and maintenance]. Channels 1 to 7 are grouped together to provide a single output contact controlling the flow of powder into the fluid bed dryer. Channel 8 utilises an external ground status LED remote indicator station/ clamp/cable to provide the operator with a visual confirmation that the mobile bin is grounded when filled.

## Earth-Rite® MULTIPOINT II

### Technical Specification

(with GRP power supply)

#### Monitoring unit

##### Zone 0/20 Installations

<b>Ambient Temperature Range</b>	-40°C to +60°C
<b>Ingress Protection</b>	IP 66
<b>Construction</b>	Stainless Steel 304
<b>Monitoring Circuit</b>	Intrinsically safe
<b>Monitoring Loop Resistance</b>	Nominally $\leq 10 \text{ Ohm}$ ( $\pm 10\%$ )
<b>Cable Entries</b>	3 x M20, 1 x M25

#### Power Supply Unit

##### Zone 2/21 Installations

<b>Power Supply</b>	115 V or 230 V AC, 50-60 Hz
<b>Current Rating</b>	200 mA
<b>Power Rating</b>	10 Watts
<b>Ambient Temperature Range</b>	-40°C to +60°C
<b>Ingress Protection</b>	IP 66
<b>Construction</b>	GRP with carbon loading
<b>Output to Monitoring Unit</b>	Intrinsically safe
<b>Output Channel Relay</b>	8 off Voltage free change over switch contacts
<b>Output Group Relay</b>	2 off Voltage free change over switch contacts
<b>Output Fault Relay</b>	1 off Voltage free change over switch contacts
<b>Relay Contact Rating</b>	240 V AC, 5 A, 500 VA max resistive 30 V DC, 2 A, 60 W max resistive
<b>Cable Entries</b>	12 x M20



#### Marshalling Junction Box

<b>Enclosure Material</b>	GRP with carbon loading
<b>Cable Entries</b>	8 Way - 10 x M20, 1 x M25 4 Way - 6 x M20, 1 x M25

#### Remote Indicator Station

##### Associated Apparatus - Zone 0/20 installation

<b>Enclosure Material</b>	GRP with carbon loading
<b>Cable Entries</b>	1x M20

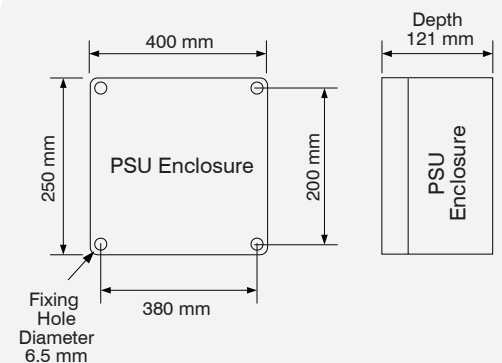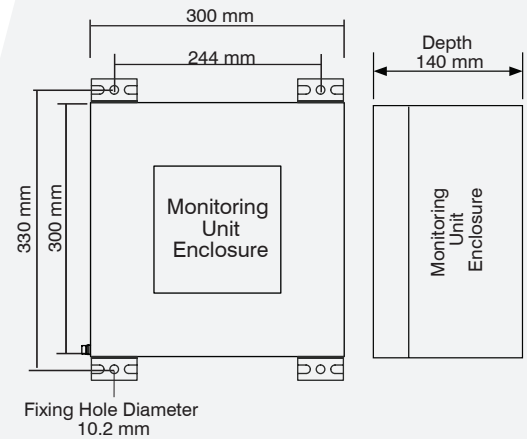

Product Description	Length	Height	Depth
8-Way Junction Box	259 mm	160 mm	91.4 mm
4-Way Junction Box	160 mm	160 mm	94 mm
Remote Indicator Station	122 mm	122 mm	76.2 mm
Junction Box with Stowage Pin	80 mm	76.2 mm	55.9 mm

For more detailed mechanical descriptions please refer to instruction manual

## Earth-Rite® MULTIPOINT II

### Technical Specification

(with stainless steel power supply)

#### Monitoring unit

##### Zone 0/20 Installations

<b>Ambient Temperature Range</b>	-40°C to +60°C
<b>Ingress Protection</b>	IP 66
<b>Construction</b>	Stainless Steel 304
<b>Monitoring Circuit</b>	Intrinsically safe
<b>Monitoring Loop Resistance</b>	Nominally $\leq 10 \text{ Ohm}$ ( $\pm 10\%$ )
<b>Cable Entries</b>	3 x M20, 1 x M25

#### Power Supply Unit

##### Zone 2/21 Installations

<b>Power Supply</b>	115 V or 230 V AC, 50-60 Hz
<b>Current Rating</b>	200 mA
<b>Power Rating</b>	10 Watts
<b>Ambient Temperature Range</b>	-40°C to +60°C
<b>Ingress Protection</b>	IP 66
<b>Construction</b>	Stainless Steel 304
<b>Output to Monitoring Unit</b>	Intrinsically safe
<b>Output Channel Relay</b>	8 off Voltage free change over switch contacts
<b>Output Group Relay</b>	2 off Voltage free change over switch contacts
<b>Output Fault Relay</b>	1 off Voltage free change over switch contacts
<b>Relay Contact Rating</b>	240 V AC, 5 A, 500 VA max resistive 30 V DC, 2 A, 60 W max resistive
<b>Cable Entries</b>	12 x M20



#### Marshalling Junction Box

<b>Enclosure Material</b>	Stainless Steel 304
<b>Cable Entries</b>	8 Way - 10 x M20, 1 x M25 4 Way - 6 x M20, 1 x M25

#### Remote Indicator Station

##### Associated Apparatus - Zone 0/20 installation

<b>Enclosure Material</b>	Stainless Steel 304
<b>Cable Entries</b>	1x M20

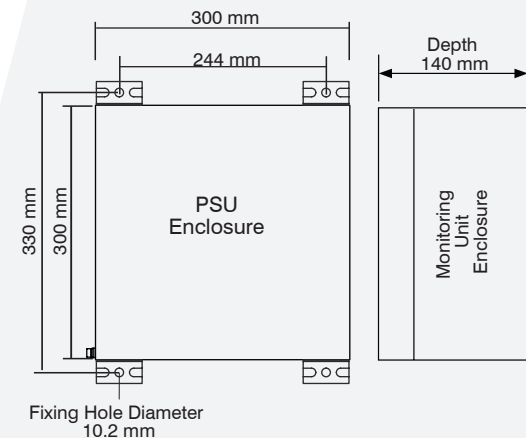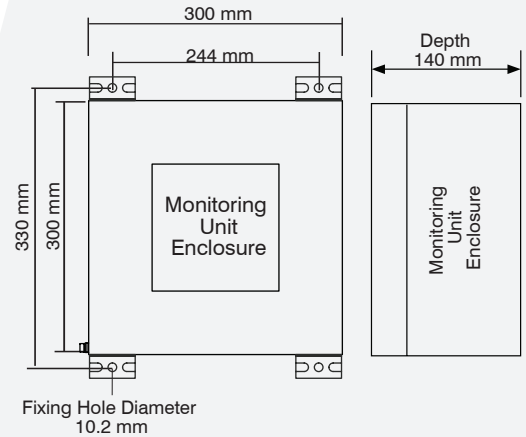

Product Description	Length	Height	Depth
8-Way Junction Box	300 mm	200 mm	81 mm
4-Way Junction Box	150 mm	150 mm	81 mm
Remote Indicator Station	150 mm	150 mm	81 mm
Junction Box with Stowage Pin	150 mm	150 mm	81 mm

For more detailed mechanical descriptions please refer to instruction manual

## Earth-Rite® MULTIPOINT II

### Hazardous Area Certification

#### Monitoring Unit

Europe / International:

North America Version Available:

##### IECEx

Ex ia IIC T4 Ga  
 Ex ia IIIC T135°C Da  
 Ta = -40°C to +60°C  
 IECEx EXV 19.0062X  
 IECEx Certifying Body: ExVeritas

##### ATEX

Ex II 1GD  
 Ex ia IIC T4 Ga  
 Ex ia IIIC T135°C Da  
 Ta = -40°C to +60°C  
 ExVeritas 19ATEX0546X  
 ATEX Notified Body: ExVeritas

##### NEC 500 / CEC (Class & Division)

Suitable for use In  
 Class I, Div. 2, Groups A, B, C, D  
 Class II, Div. 1, Groups E, F, G  
 Class III, Div. 1  
 Provides intrinsically safe output for  
 Class I, Div. 1, Groups A, B, C, D;  
 Class II, Div. 1, Groups E, F, G  
 Class III, Div. 1;  
 When installed per Control Dwg;  
 X MPII Q15152  
 Ta = -40°C to +60°C (-40°F to +140°F)

OSHA recognised NRTL: CSA  
 CSA 15.70005381

##### NEC 505 & 506 (Class & Zoning)

Class I, Zone 2, AEx nA[ia Ga] nC IIC T4 Gc  
 (Gas & vapour)  
 Class II, Zone 21, AEx tb IIIC T65°C Db  
 (Combustible Dusts)

##### CEC Section 18 (Class & Zoning)

Ex nA[ia Ga] nC IIC T4 Gc  
 Ex tb IIIC T65°C Db

#### Power Supply Unit

Europe / International:

North America Version Available:

##### IECEx

Ex ec[ia Ga] nC IIC T4 Gc  
 Ex tb IIIC T65°C Db  
 Ta = -40°C to +60°C  
 IECEx EXV 19.0062X  
 IECEx Certifying Body: ExVeritas

##### ATEX

Ex II 3(1)G  
 II 2D  
 Ex ec[ia Ga] nC IIC T4 Gc  
 Ex tb IIIC T65°C Db  
 Ta = -40°C to +60°C  
 ExVeritas 19ATEX0546X  
 ATEX Notified Body: ExVeritas

##### NEC 500 / CEC (Class & Division)

Suitable for use In  
 Class I, Div. 2, Groups A, B, C, D  
 Class II, Div. 1, Groups E, F, G  
 Class III, Div. 1  
 Provides intrinsically safe output for  
 Class I, Div. 1, Groups A, B, C, D;  
 Class II, Div. 1, Groups E, F, G  
 Class III, Div. 1;  
 When installed per Control Dwg;  
 X MPII Q15152  
 Ta = -40°C to +60°C (-40°F to +140°F)

OSHA recognised NRTL: CSA  
 CSA 15.70005381

##### NEC 505 & 506 (Class & Zoning)

Class I, Zone 2, AEx nA[ia Ga] nC IIC T4 Gc  
 (Gas & vapour)  
 Class II, Zone 21, AEx tb IIIC T65°C Db  
 (Combustible Dusts)

##### CEC Section 18 (Class & Zoning)

Ex nA[ia Ga] nC IIC T4 Gc  
 Ex tb IIIC T65°C Db

### Additional Certification

EMC Tested:

 to EN 61000-6-2, EN 61000-6-3  
 FCC - Part 15

## System Options

### 2-Pole Surface Mountable connector

With this assembly operators tasked with earthing mobile process equipment will have a dedicated earthing point to attach the easy to use screw thread connector. The 'plug and play' connector can interface with all Newson Gale 2 core systems to provide earth monitoring capability on a wide range of mobile processes and equipment where generic earthing clamps cannot be used.

The conical shape design aids in the reduction of powder deposit build up over time and aids in clean down operations.

- > Made using Stainless Steel 304 with Viton O-Rings
- > IP 66
- > -40°C to 60°C
- > Various lengths of straight or spiral Hytrel cable available.
- > IECEx Ex h Certification:

Ex h IIC T6 Ga  
Ex h IIIC T85°C Da  
Ta = -40°C to +60°C  
IECEx EXV 20.0033



#### Copyright Notice

The website and its content is copyright of Newson Gale Ltd © 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- you may print or download to a local hard disk extracts for your personal and noncommercial use only
- you may copy the content to individual third parties for their personal use, but only if you acknowledge the website as the source of the material

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

#### Right to change

This document provides general information only and may be subject to change at any time without notice. All information, representations, links or other messages may be changed by Newson Gale at any time without prior notice or explanation.

Newson Gale is not obliged to remove any outdated information from its content or to expressly mark it as being outdated. Please seek the advice of professionals as necessary regarding the evaluation of any content.

#### Disclaimer of liability

The information provided in this Datasheet is provided by Newson Gale without any representations or warranties, expressed or implied, as to its accuracy or completeness. The liability of Newson Gale for any expenses, losses or actions incurred whatsoever by the recipient as a result of the use of this Datasheet shall be excluded.