



Deuschmann
your ticket to all buses

Gateway & Protocol Converter

UNIGATE *FALCON*

FOCUS ON SKILL



EtherCAT®

EtherNet/IP®

CANopen®

ETHERNET TCP/IP

Modbus

PROFI[®]
BUS

PROFI[®]
NET

- > New processor generation
- > New operating concept
- > Available without housing
- > Compact design
- > Fast data exchange
- > Designed & manufactured in Germany



Deutschmann Automation

Cam Controls | Fieldbus Gateways | Industrial Ethernet Products

Deutschmann Automation

The fast way to Industrial Ethernet

Deutschmann Automation, the specialist for industrial data communication, is a medium-sized German company located near Frankfurt.

The company designs and manufactures innovative network components for the sector of industrial data communication in the Industry 4.0 environment. Various series of Fieldbus and Industrial Ethernet gateways, and embedded solutions as well as development tools are offered under the brand name UNIGATE®.

A special feature of the UNIGATE® Gateway series is Brand labeling. With the customized design Deutschmann Automation not only gives you the opportunity to pre-configure the device and choose different housing colors, you can also apply your own logo.

In 2016 Deutschmann, who became known with cam controls, celebrated its 40th birthday.



Michael M. Reiter, General Manager Marketing and Sales, says: „Today, our company stands for innovative strength in the development of new network components and solutions for a wide range of applications - while at the same time providing consistency in our product range and comprehensive customer support“.

UNIGATE



FALCON

-focus on skill

Contents

What sets us apart	06
UNIGATE FALCON - general overview	08
UNIGATE FALCON - technical data	12
UNIGATE FALCON Embedded - general overview (without housing)	14
UNIGATE FALCON Embedded - technical data (without housing)	16
UNIGATE FALCON Embedded - different versions (without housing)	18


01

What sets us apart

Configuring or programming - Choose your own way

Configuration via web interface

The configuration of the UNIGATE® FALCON modules is done comfortably via web interface over the Ethernet interface.

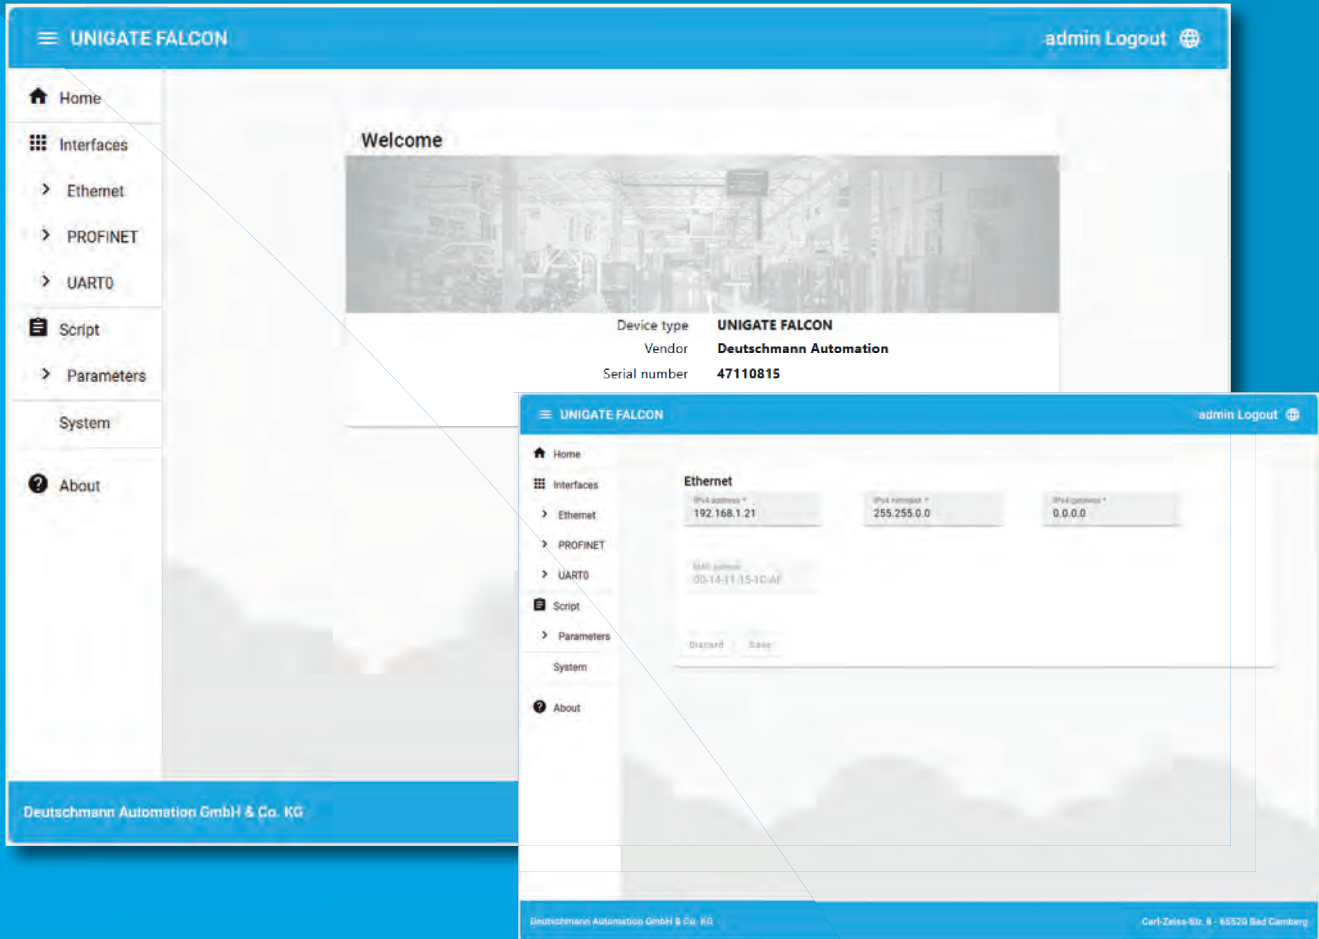


Protocol Developer - Flexibility via Deutschmann Script language

More complex applications, which cannot be presented via a pure configuration can be programmed via the Deutschmann Script language.

Free programming is possible with the Protocol Developer IDE and the easy-to-learn Deutschmann Script language developed by Deutschmann Automation.

It allows the emulation of proprietary protocols as well as the implementation of standard protocols. Simple scripts can be processed in a few microseconds. Script debugging is done via USB interface, so no additional debugging hardware is required.

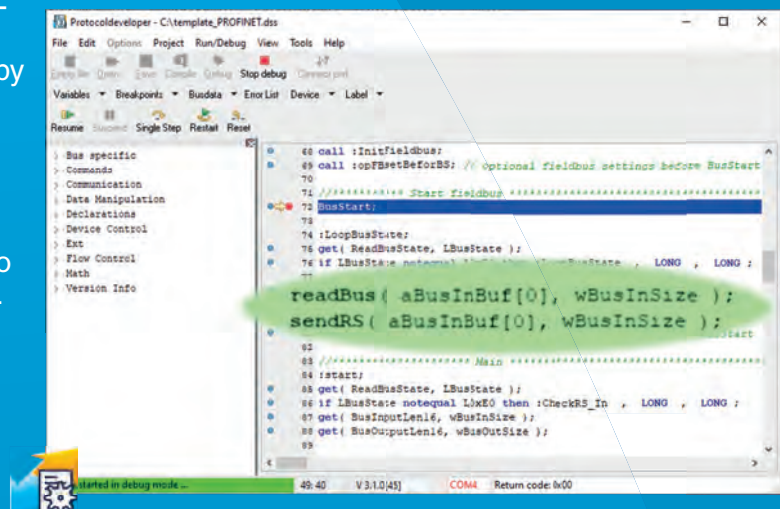

Script example in the Protocol Developer

02

overview

UNIGATE

FALCON

General overview



UNIGATE FALCON

General overview

FUTURE PROOF GATEWAY

Compact housing - High data throughput - Fast data transfer



The new UNIGATE FALCON protocol converter/gateway series connects devices such as automation components with the desired Industrial Ethernet or fieldbus. In addition to the respective Industrial Ethernet or fieldbus interface, further interfaces are available, such as the serial interfaces RS232/RS422/RS485; Ethernet interface and a CAN interface (CANopen/CAN-FD/ CAN 2.0A/ CAN 2.0B).


UNIGATE FALCON is available as an extremely compact DIN-rail device measuring 25 mm x 95 mm x 95 mm {W x H x D}.

The device is configured using a web interface via Ethernet. As an alternative to device configuration, UNIGATE FALCON can also be freely programmed using Deutschmann Automation's proven script language (mix of Basic & Pascal) and the Protocol Developer software. The script can be debugged via the μ USB interface. The cycle time of the script could be accelerated by a factor of 50 to 80 by using the latest processor technology.

This means that the data can be routed through the UNIGATE faster overall and is therefore available for retrieval at the respective interfaces more quickly.

Another feature is the integrated service functions, which can be called up via a button. A hardware reset or factory reset, for example, can be carried out without additional equipment.

- RS232, RS485 and RS422 on board
- The RS485 mode enables multi-drop communication (e. g. data acquisition from multiple nodes)
- Software controlled line termination (via configuration or button control)
- Same structure on the serial side in all variants
- The Ethernet or fieldbus side corresponds to the standards or the standard market versions
- Adaptation of the terminal device firmware is not necessary
- Modern, compact DIN-rail module
 - Uniform dimension across the entire family
- Also available as embedded module
- Wide voltage range from 10 to 33 VDC
- Built-in isolation on the industrial Ethernet and Fieldbus interfaces
- Configuration of the module via web interface over the Ethernet interface
- Configuration of the module via web interface
- Support of various serial protocols
 - Modbus RTU Master/Slave
 - Modbus ASCII Master/Slave
 - 3964(R) protocol
 - Generic protocol (e.g. ASCII communication)
- Script programming
 - E. E.g. for emulating proprietary protocols
 - Free programming via the Deutschmann Script Language (mix of Basic & Pascal) Protocol Developer software
 - Fast script processing
 - Script debugging via μ USB interface

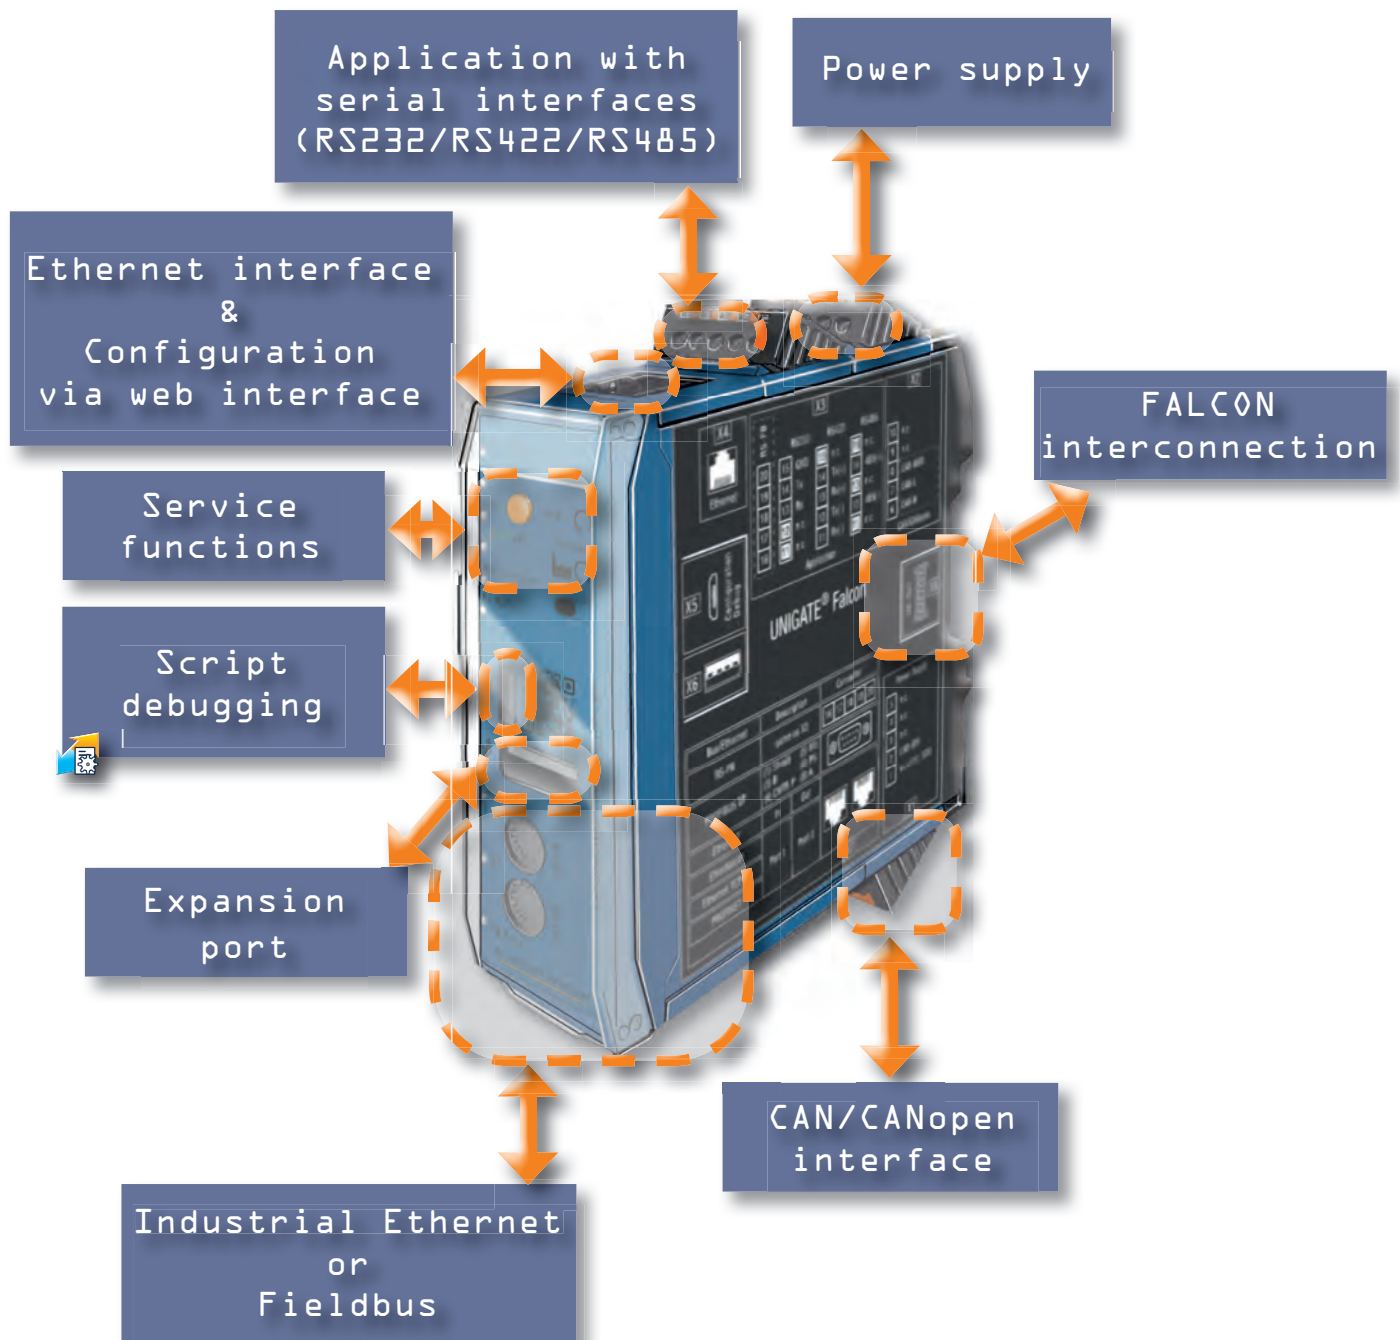

UNIGATE FALCON

Technical overview

UNIGATE FALCON PRO - PROFIBUS-DP



■ PROFIBUS interface

- Complete PROFIBUS-DP slave interface
- Automatic baud rate detection (96 Kbit/s - 12 Mbit/s)
- Supports DPV0 and DPV1
- Isolated 9-pin D-sub connection
- PROFIBUS address adjustable via rotary switch
- Max. 244 bytes input and 244 output data, max. 488 bytes in total

■ Additional functions and interfaces

UNIGATE FALCON PRO - EtherCAT



■ EtherCAT interface

- Supports CoE (CANopen over EtherCAT)
- 100 Mbit/s full duplex
- Isolated EtherCAT interface with 2x RJ45 connection (IN and OUT)
- Generic XML file (with configuration)
- Up to 1024 bytes input and 1024 bytes output data

■ Additional functions and interfaces

UNIGATE FALCON PRO PROFINET 2Port



■ PROFINET interface

- PROFINET device interface, conformance class B, real time communication (RT)
Note: Can also be operated in IRT network
- Max. 1024 bytes input- and 1024 bytes output data
- Cyclical- and acyclical data exchange
- 100 Mbit/s
- FTP-Server and Web server
- System redundancy (S2) and media redundancy protocol (MRP)
- PROFINET configuration via GSDML file
- Isolated 2x RJ45 connection (integrated 2 port switch)

■ Additional functions and interfaces

Additional functions and interfaces

■ UART application interface

- RS232/RS422/RS485 on board
- Transmission rate max. 6 MBaud

■ Ethernet interface

- Configuration via web interface
- Isolated 1x RJ connection
 - TCP/IP socket interface

■ CAN interface

- CANopen
- CAN Layer 2 (CAN 2.0A/CAN 2.0B)
- CAN-FD

■ Service menu

- Functions via push-button
 - Reset
 - Factory reset
 - Termination serial interfaces

PRO: Activation via chargeable activation code

UNIGATE FALCON - technical data


Protocols	<i>configurable</i>	Modbus RTU Master/Slave, Modbus ASCII Master/Slave, 3964(R); SSI Generic (e.g. ASCII communication)
	<i>more protocols via Script</i>	Customized protocols can be created via Script
Max. stations		31 (with RS485/422)
Baud rates		UART up to 6 MBaud
Physical standards		RS232/422/485; Ethernet; CAN (CANopen/CAN-FD/CAN 2.0A/CAN 2.0B)
Modbus commands		0x01 Read Coils, 0x02 Read Discrete Inputs, 0x03 Read Holding Registers, 0x04 Read Input Registers, 0x05 Write Single Coil, Write Single Register, 0x0F Write Multiple Coils, 0x10 Write Multiple Registers, Customized commands can be created.
Technical Details DINrail		Standard
Weight	approx. 105 g	
Dimensions (W x H x D)	25 mm x 95 mm x 95 mm	
Protection class	IP20	Protection against foreign bodies & water to IEC 529 (DIN 40050)
Housing material	Polyamide	
Installation position	Any	
Location	Switch cabinet	
Mounting	DIN rail	EN 50022
Certifications		
CE	2014/30/EU	EN61000-6-2 Immunity EN55011 class A Emission
RoHS		RoHS II Directive 2011/65/EU
REACH	downstream user	
Electrical Characteristics		
External power supply	10..33 V DC	
Hardware Characteristics		
Short-circuit protection	Yes	
Galvanic isolation on subnetwork	Yes	
Environmental Characteristics		
Operating temperature	-25°C (non condensing) up to +70°C	
Storage temperature	-40°C ... +100°C	
Relative humidity	0% - 95% non condensing	
Immunity and emission for industrial environment		
Electrostatic discharge	+/- 4 kV	EN 61000-4-2
Electro magnetic RF fields	10 V/m 80 MHz - 1 GHz 3 V/m 1,4 GHz - 2,0 GHz 1 V/m 2,0 GHz - 2,7 GHz	EN 61000-4-3
Fast Transients	+/- 1 kV	EN 61000-4-4
Surge protection	+/- 1 kV	EN 61000-4-5
RF conducted interference	10 V/rms	EN 61000-4-6
Emission (at 10 m)	40 dB 30 MHz - 230 MHz 47 db 30 MHz - 1 GHz	CISPR 16-2-3

UNIGATE FALCON Embedded

General overview

WITHOUT HOUSING

High data throughput - Fast data transfer

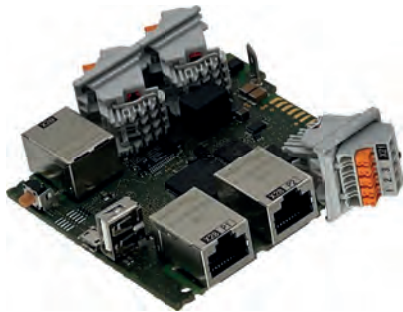

The new UNIGATE FALCON Protocol Converter/Gateway series is also available as an embedded version measuring 25 mm x 95 mm x 95 mm (L x W x H). Mounting via 4 mounting holes Ø 3,0 mm. The range of functions is identical to the DIN rail device.

UNIGATE Falcon is based on ARM Cortex-M processor technology, which ensures significantly higher data throughput compared to the previous generation. The transfer rates of the serial interface are about ten times faster in RS485/422 mode.

The device is configured using a web interface via Ethernet. As an alternative to device configuration, UNIGATE FALCON can also be freely programmed using Deutschmann Automation's proven script language (mix of Basic & Pascal) and the Protocol Developer software. The script can be debugged via the µUSB interface. The cycle time of the script could be accelerated by a factor of 50 to 80 by using the latest processor technology.


This means that the data can be routed through the UNIGATE faster overall and is therefore available for retrieval at the respective interfaces more quickly.

Another feature is the integrated service functions, which can be called up via a button. A hardware reset or factory reset, for example, can be carried out without additional equipment.

- RS232, RS485 and RS422 on board
- The RS485 mode enables multi-drop communication (e. g. data acquisition from multiple nodes)
- Software controlled line termination (via configuration or button control)
- Same structure on the serial side in all variants
- The Ethernet or fieldbus side corresponds to the standards or the standard market versions
- Adaptation of the terminal device firmware is not necessary
- Modern, compact DIN-rail module
 - Uniform dimension across the entire family
- Also available as embedded module
- Wide voltage range from 10 to 33 VDC
- Built-in isolation on the industrial Ethernet and Fieldbus interfaces
- Configuration of the module via web interface over the Ethernet interface
- Configuration of the module via web interface
- Support of various serial protocols
 - Modbus RTU Master/Slave
 - Modbus ASCII Master/Slave
 - 3964(R) protocol
 - Generic protocol (e.g. ASCII communication)
- Script programming
 - E. E.g. for emulating proprietary protocols
 - Free programming via the Deutschmann Script Language (mix of Basic & Pascal) Protocol Developer software
 - Fast script processing
 - Script debugging via µUSB interface

UNIGATE FALCON Embedded - SETUP


Structure

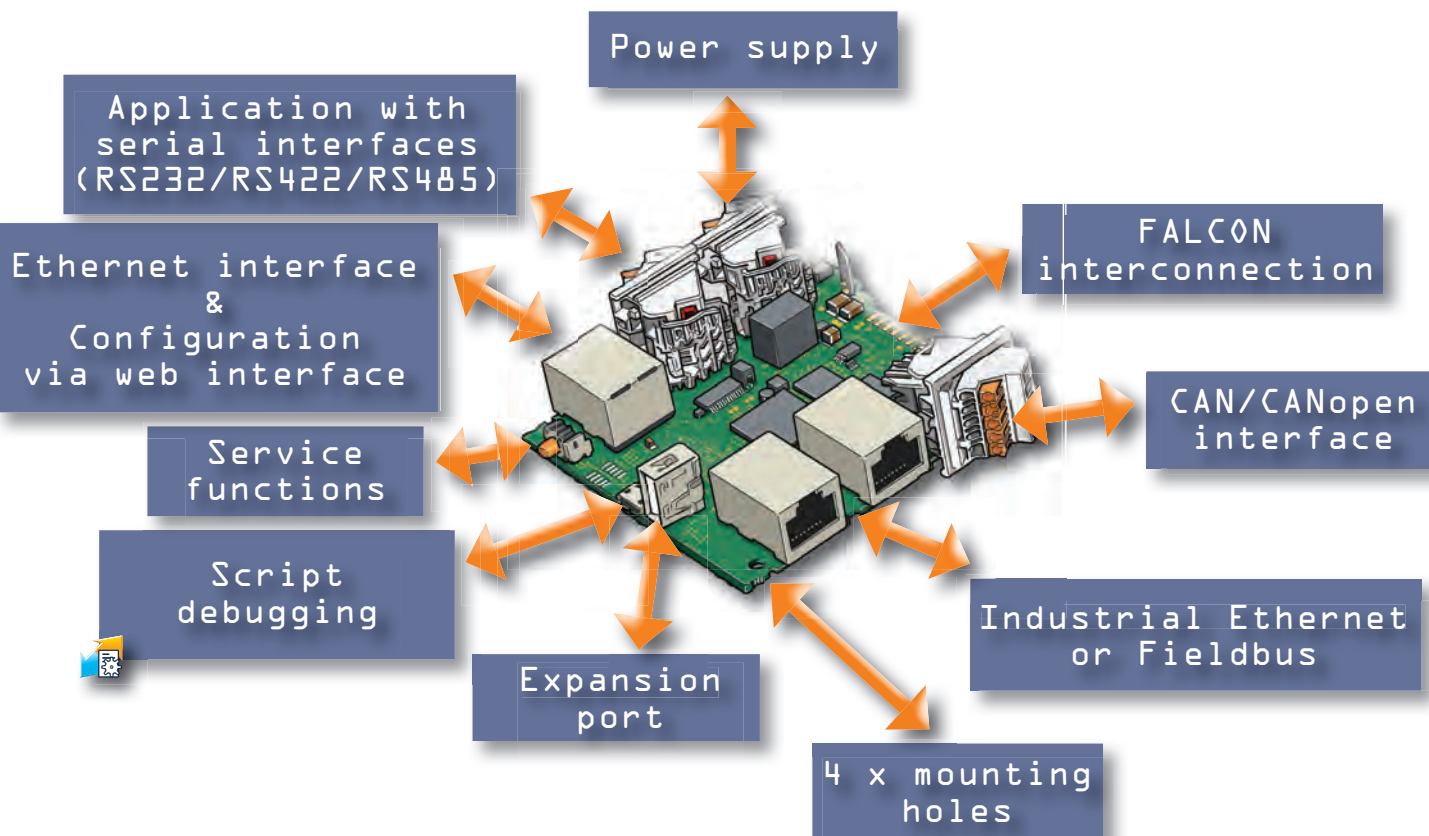

Application Example

■ Task

- Any Industrial Ethernet or fieldbus interface for your own device
- Integrated solution
- Without re-designing your own electronics
- No use of an external Protocol Converter or Gateway

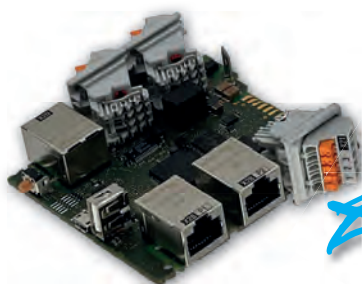

■ Solution

- Finished module without housing
- Mounting via 4 mounting holes $\varnothing 3.0$ mm
- No re-design of your own electronics
- Functional scope identical to DIN rail module



UNIGATE FALCON Embedded

Technical overview

UNIGATE FALCON PRO EM1 - PROFIBUS-DP



■ PROFIBUS interface

- Complete PROFIBUS-DP slave interface
- Automatic baud rate detection (96 Kbit/s - 12 Mbit/s)
- Supports DPV0 and DPV1
- Isolated 9-pin D-sub connection
- PROFIBUS address adjustable via rotary switch
- Max. 244 bytes input and 244 output data, max. 488 bytes in total

■ Additional functions and interfaces

UNIGATE FALCON PRO EM1- EtherCAT



■ EtherCAT interface

- Supports CoE (CANopen over EtherCAT)
- 100 Mbit/s full duplex
- Isolated EtherCAT interface with 2x RJ45 connection (IN and OUT)
- Generic XML file (with configuration)
- Up to 1024 bytes input and 1024 bytes output data

■ Additional functions and interfaces

UNIGATE FALCON PRO EM1 - PROFINET



■ PROFINET interface

- PROFINET device interface, conformance class B, real time communication (RT)
Note: Can also be operated in IRT network
- Max. 1024 bytes input- and 1024 bytes output data
- Cyclical- and acyclical data exchange
- 100 Mbit/s
- FTP-Server and Web server
- System redundancy (S2) and media redundancy protocol (MRP)
- PROFINET configuration via GSDML file
- Isolated 2x RJ45 connection (integrated 2 port switch)

■ Additional functions and interfaces

Additional functions and interfaces

■ UART application interface

- RS232/RS422/RS485 on board
- Transmission rate max. 6 MBaud

■ Ethernet interface

- Configuration via web interface
- Isolated 1x RJ connection
 - TCP/IP socket interface

■ CAN interface

- CANopen
- CAN Layer 2 (CAN 2.0A/CAN 2.0B)
- CAN-FD

■ Service menu

- Functions via push-button
 - Reset
 - Factory reset
 - Termination serial interfaces

PRO: Activation via chargeable activation code

UNIGATE FALCON Embedded - technical data

Protocols	<i>configurable</i>	Modbus RTU Master/Slave, Modbus ASCII Master/Slave, 3964(R); SSI Generic (e.g. ASCII communication)
	<i>more protocols via Script</i>	Customized protocols can be created via Script
Max. stations		31 (with RS485/422)
Baud rates		UART up to 6 MBaud
Physical standards		RS232/422/485; Ethernet; CAN (CANopen/CAN-FD/CAN 2.0A/CAN 2.0B)
Modbus commands		0x01 Read Coils, 0x02 Read Discrete Inputs, 0x03 Read Holding Registers, 0x04 Read Input Registers, 0x05 Write Single Coil, Write Single Register, 0x0F Write Multiple Coils, 0x10 Write Multiple Registers, Customized commands can be created.
Technical Details Embedded		Information
Weight	approx. 47 g up to 68 g	Depending on version
Dimensions (W x H x D)	95 mm x 25 mm x 84 mm	Depending on version
Housing material	without housing	
Installation position	Any	
Location	Any	
Mounting	Via 4 mounting holes Ø 3,0mm	EN 50022
Certifications		
CE	2014/30/EU	EN61000-6-2 Immunity EN55011 class A Emission
RoHS		RoHS II Directive 2011/65/EU
REACH	downstream user	
Electrical Characteristics		
External power supply	10..33 V DC	
Hardware Characteristics		
Short-circuit protection	Yes	
Galvanic isolation on subnetwork	Yes	
Environmental Characteristics		
Operating temperature	-25°C (non condensing) up to +70°C	
Storage temperature	-40°C ... +100°C	
Relative humidity	0% - 95% non condensing	
Immunity and emission for industrial environment		
Electrostatic discharge	+/- 4 kV	EN 61000-4-2
Electro magnetic RF fields	10 V/m 80 MHz - 1 GHz 3 V/m 1,4 GHz - 2,0 GHz 1 V/m 2,0 GHz - 2,7 GHz	EN 61000-4-3
Fast Transients	+/- 1 kV	EN 61000-4-4
Surge protection	+/- 1 kV	EN 61000-4-5
RF conducted interference	10 V/rms	EN 61000-4-6
Emission (at 10 m)	40 dB 30 MHz - 230 MHz 47 db 30 MHz - 1 GHz	CISPR 16-2-3

UNIGATE FALCON Embedded

Push-in spring connection

UNIGATE FALCON PRO EM2 - PROFIBUS-DP



on request



■ PROFIBUS interface

- Complete PROFIBUS-DP slave interface
- Automatic baud rate detection (96 Kbit/s - 12 Mbit/s)
- Supports DPV0 and DPV1
- Isolated 9-pin D-sub connection
- PROFIBUS address adjustable via rotary switch
- Max. 244 bytes input and 244 output data, max. 488 bytes in total

■ Additional functions and interfaces

UNIGATE FALCON PRO EM2- EtherCAT



on request




■ EtherCAT interface

- Supports CoE (CANopen over EtherCAT)
- 100 Mbit/s full duplex
- Isolated EtherCAT interface with 2x RJ45 connection (IN and OUT)
- Generic XML file (with configuration)
- Up to 1024 bytes input and 1024 bytes output data

■ Additional functions and interfaces

UNIGATE FALCON PRO EM2 - PROFINET



on request



■ PROFINET interface

- PROFINET device interface, conformance class B, real time communication (RT)
Note: Can also be operated in IRT network
- Max. 1024 bytes input- and 1024 bytes output data
- Cyclical- and acyclical data exchange
- 100 Mbit/s
- FTP-Server and Web server
- System redundancy (S2) and media redundancy protocol (MRP)
- PROFINET configuration via GSDML file
- Isolated 2x RJ45 connection (integrated 2 port switch)

■ Additional functions and interfaces

Additional functions and interfaces

■ UART application interface

- RS232/RS422/RS485 on board
- Transmission rate max. 6 MBaud

■ Ethernet interface

- Configuration via web interface
- Isolated 1x RJ connection
 - TCP/IP socket interface

■ CAN interface

- CANopen
- CAN Layer 2 (CAN 2.0A/CAN 2.0B)
- CAN-FD

■ Service menu

- Functions via push-button
 - Reset
 - Factory reset
 - Termination serial interfaces

PRO: Activation via chargeable activation code

UNIGATE FALCON Embedded

Without connector

UNIGATE FALCON PRO EM3 - PROFIBUS-DP



on request



■ PROFIBUS interface

- Complete PROFIBUS-DP slave interface
- Automatic baud rate detection (96 Kbit/s - 12 Mbit/s)
- Supports DPV0 and DPV1
- Isolated 9-pin D-sub connection
- PROFIBUS address adjustable via rotary switch
- Max. 244 bytes input and 244 output data, max. 488 bytes in total

■ Additional functions and interfaces

UNIGATE FALCON PRO EM3- EtherCAT



on request



■ EtherCAT interface

- Supports CoE (CANopen over EtherCAT)
- 100 Mbit/s full duplex
- Isolated EtherCAT interface with 2x RJ45 connection (IN and OUT)
- Generic XML file (with configuration)
- Up to 1024 bytes input and 1024 bytes output data

■ Additional functions and interfaces

UNIGATE FALCON PRO EM3 - PROFINET



on request



■ PROFINET interface

- PROFINET device interface, conformance class B, real time communication (RT)
Note: Can also be operated in IRT network
- Max. 1024 bytes input- and 1024 bytes output data
- Cyclical- and acyclical data exchange
- 100 Mbit/s
- FTP-Server and Web server
- System redundancy (S2) and media redundancy protocol (MRP)
- PROFINET configuration via GSDML file
- Isolated 2x RJ45 connection (integrated 2 port switch)

■ Additional functions and interfaces

Additional functions and interfaces

■ UART application interface

- RS232/RS422/RS485 on board
- Transmission rate max. 6 MBaud

■ Ethernet interface

- Configuration via web interface
- Isolated 1x RJ connection
 - TCP/IP socket interface

■ CAN interface

- CANopen
- CAN Layer 2 (CAN 2.0A/CAN 2.0B)
- CAN-FD

■ Service menu

- Functions via push-button
 - Reset
 - Factory reset
 - Termination serial interfaces

¹PRO: Activation via chargeable activation code



Deuschmann Automation GmbH & Co. KG
Carl-Zeiss-Straße 8 | 65520 Bad Camberg | Germany
Tel.: +49 6434 9433-0
info@deuschmann.de | www.deuschmann.com

Technik wiki: wiki.deuschmann.de



@deuschmann_DE



Deuschmann Automation