



Customized displays and seamless integration

Advanced machine information

The **RMQ-Titan Advanced Indicator** delivers clear, intuitive visual guidance to communicate machine status, process stages, and operational progress. It offers comprehensive customization capabilities, enabling users to create up to 24 tailored visual displays that incorporate a wide range of colors, text, graphics, and sensor data, all through an intuitive configuration tool. It is designed to fit a standard 22.5 mm mounting hole, consistent with our RMQ-Titan M22 pushbuttons, allowing for efficient installation on control cabinet doors, enclosures, or machinery, and ensuring a uniform appearance and user experience. The IP66 and IP69 protection ratings ensure reliable performance in diverse environments.



Reliable data flow for reduced downtime

The RMQ-Titan Advanced Indicator helps operators monitor performance, optimize uptime, and reduce maintenance time for their machines.



Powering Business Worldwide

Suitable for many applications

The RMQ-Titan Advanced Indicator delivers decentralized status notifications for complex machinery on the shop floor, facilitating faster maintenance interventions, minimizing troubleshooting time, and improving machine utilization.


Furthermore, it is well-suited to low-complexity machines that do not incorporate PLCs.

The Advanced Indicator is also highly effective for specialised outdoor vehicles, such as those used for asphalt repair or sewer maintenance, by supplying operators with critical operational data outside the vehicle cabin.

Additionally, it supports auxiliary equipment including cooling, mixing, and packaging units, by displaying essential information such as temperature, pressure, and error alerts.



Product Overview

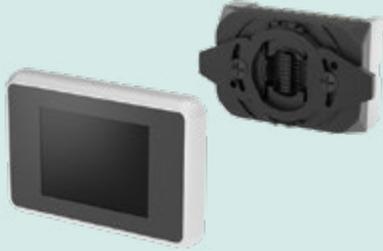

Description

RMQ-Titan Advanced Indicator

- Display, 2" TFT, 22.5 mm mounting hole, IP66, IP69, UL 508 Type 3R, 4X, 12, 13
- Control module Hardwired, 6 digital input + 2 configurable input (digital / 0-10V / 0-20mA / 4-20mA)
USB-C interface for configuration
 $U_e = 12-24\text{ V DC}$, IP20, -25° to $+55^\circ\text{C}$

Model code

(Article number)

M22-AI-8I
(EP-401626)



Surface mounting enclosure

- IP66, IP69
- 1 mounting hole for the RMQ-Titan Advanced Indicator

M22-I1-AI
(EP-401628)



Easy configuration via PC and USB-C cable

The RMQ-Titan Advanced Indicator is easy to configure with our free software and uses a USB-C cable for fast data transfer to a PC.



For more information, visit Eaton.com/advancedindicator

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges
Switzerland
Eaton.com

Electrical Sector
Eaton Industries GmbH
Hein-Moeller-Str. 7-11
53115 Bonn / Germany

© 2025 Eaton
All Rights Reserved
Publication No.: FL047016EN
October 2025

The products, information and prices contained in this document are subject to change. The same is true for any errors or omissions. Only the order confirmation and the technical documentation received from Eaton are binding. Photos and illustrations are indicative only and do not serve as proof of any appearance or functionality. Their use in any form must be approved in advance by Eaton. The same applies for brand names (in particular Eaton, Moeller, Cutler-Hammer, Cooper and Bussmann). Eaton's terms of sale, as published on Eaton's websites and included with order confirmations received from Eaton, apply.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

EATON
Powering Business Worldwide

Follow us on social media to get the latest product and support information.

