




**Pioneering Wear Protection** 



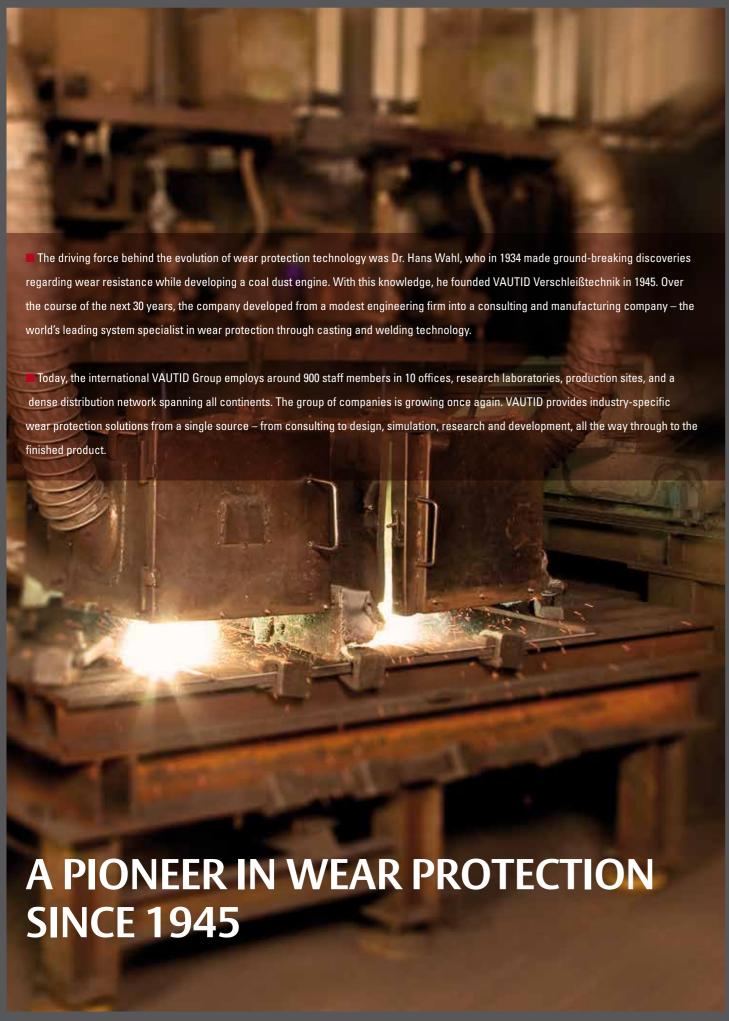

Only machines and industrial systems that operate efficiently can generate profits. Continuous, low-maintenance operations and a long service life ensure sustainable business success. The road to prosperity is made possible through innovative VAUTID wear protection in casting and welding technology.

VAUTID for manufacturers and end users. VAUTID system solutions are designed for original industrial plant equipment and process engineering machinery as well as the subsequent protection and regeneration of elements exposed to wear. VAUTID plans, develops and manufactures comprehensive wear protection solutions. Custom-tailored VAUTID concepts are perfectly aligned in terms of technology and economy and ensure reliable, profitable production.

VAUTID continues to set the standard: V100 has been the #1 product in the industry in metal-based wear protection for over 65 years.

#### Consistent performance and return on investment with VAUTID

VAUTID consulting and design. Our goal is to develop the best solutions for reducing wear in original equipment operation and maintenance of systems and machines. To achieve this goal, VAUTID engineers analyze your requirements, prepare a fail-safe diagnosis and design a custom solution for protecting wear-exposed parts. The right VAUTID materials are selected to ensure optimum protection against wear, corrosion or heat. VAUTID uses its expertise to cut wear costs and maximize the service life of the equipment.



The founder and pioneer of metal-based wear protection was Dr. Hans Wahl



VAUTID grew out of research. With the development of the coal dust engine, Dr. Wahl also helped further the concept of wear protection



With its international focus on all major markets, innovative spirit and "Made in Germany" attention to detail, VAUTID guarantees each customer top-of-the-line system solutions and materials that are not just ahead of their time but that ensure perfect quality on the spot.

VAUTID research and development. To ensure maximum wear protection, VAUTID focuses all of its strengths on developing leading, innovative, metallurgic and constructive solutions to wear problems. In the VAUTID wear laboratory, a wide variety of structural tests, strength tests, and analyses (such as FEM) are conducted. By using 3D-CAD designs, model building, and simulated solidification, VAUTID innovations are prepared for market faster and more reliably. By cooperating with universities and institutions and participating in government-backed research projects, VAUTID can incorporate cutting-edge knowledge to ensure a long service life and profitable operation.

VAUTID training sessions, seminars, conferences, and scientific lectures are a perfect complement to the VAUTID catalog of innovative products and solutions. Customers benefit from the latest wear expertise, which they can implement right away into their daily routines.

#### Proven a million times over and continuously developed


VAUTID production. As a specialist in comprehensive wear protection, VAUTID produces all of its materials in accordance with high VAUTID quality standards in its own production facilities. Here, special raw materials, careful attention to detail, and cutting-edge process engineering are combined with the expertise and commitment of our staff to produce VAUTID premium products. With the ongoing expansion of further production sites, VAUTID will be able to deliver even more highly customized solutions faster than ever before.

## **VAUTID** quality assurance

VAUTID has been ISO 9002 certified since 1993 and ISO 9001 certified since 1996. All VAUTID deposition welding materials, composite wear plates, and casting products are developed, tested and produced in accordance with these strict quality requirements. This guarantees a consistently high standard for all VAUTID premium products.



VAUTID wear research laboratory: Quality control

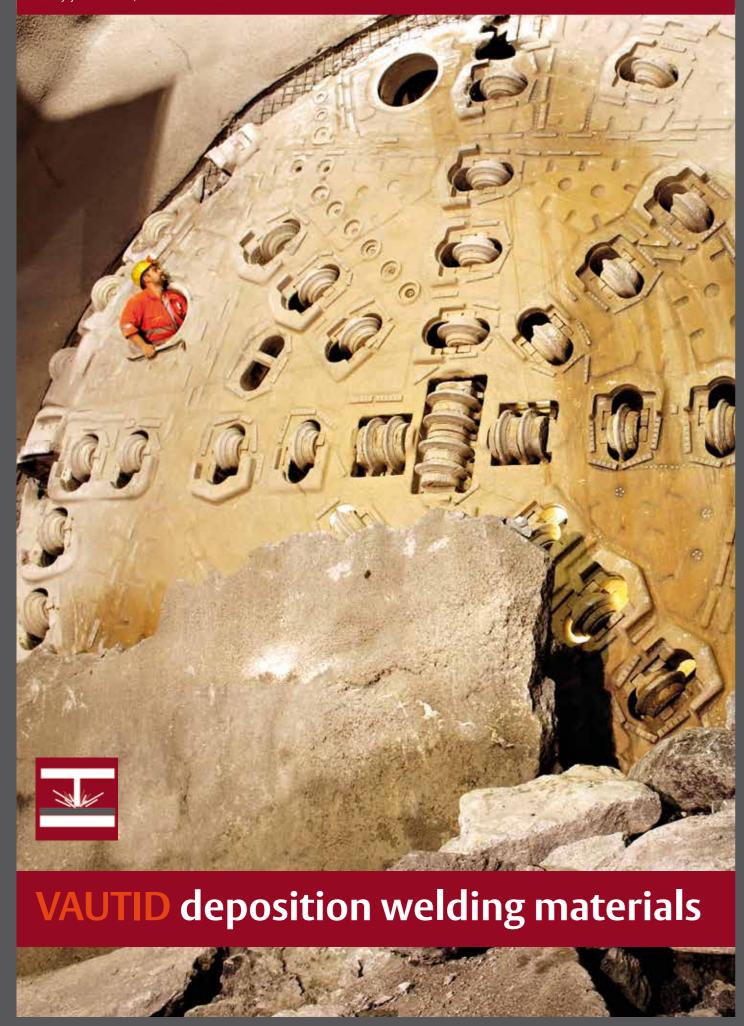


The unique VAUTID product portfolio ranges from wearproof deposition welding materials to composite wear plates to casting products – all offering first-rate protection for wear-susceptible parts in continuous abrasive operations.

Advantages. VAUTID deposition welding materials can be applied quickly and are an especially efficient solution to a variety of wear problems on site. In order to meet every requirement in every field of application perfectly, VAUTID deposition welding materials are available in a variety of material types, alloys and qualities, including hardfacing welding materials, rust-free auxiliary welding materials, auxiliary repair welding materials and special materials. These materials are available as stick electrodes or tubular wire

**VAUTID** deposition welding materials can be applied universally and in a short amount of time. They provide long-lasting, cost-efficient protection for high wearand-tear parts.

VAUTID deposition welding materials offer cost-efficient, lasting protection

Fields of application. Typical applications for VAUTID deposition welding materials include coating of mixing tools, hardfacing of excavator teeth, powder deposition welding of fan blades, hardfacing of bucket chain excavators and sinter crushers.

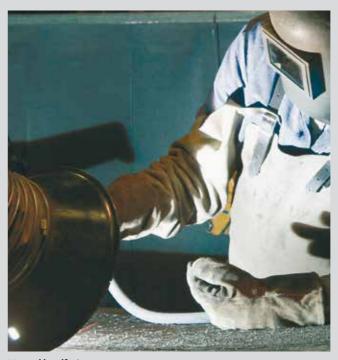



**VAUTID** tubular wire

# VAUTID hardfacing welding programme on iron base

Forms of stress	Applications	VAUTID Type	Form	Alloy type	Hardness Vickers HV 30	Hardness Rockwell HRC
Advantasi	buffer layers, rails, parts for chemical industry, joint welding	VAUTID 18/8/6	stick electrode tubular wire	X15CrNiMn1886	200 400*	40*
Corresion Temperature	buffer layers, rails, parts for chemical industry, for materials difficult to weld	VAUTID 30/9 (29/9)	stick electrode tubular wire	X10CrNi309	210	
	build-up and buffer layers, idlers	VAUTID 30	stick electrode tubular wire	low alloyed Fe, Cr, Si, Mn	300	30
Akrasios Impact	crushing heads, hammers for crushers, crushing jaws	VAUTID 50 (beta)	stick electrode tubular wire	high alloyed Fe, Cr, C, Mn	220 520*	10 50*
Corrosion Temperature	crushing heads, hammers for crushers, crushing jaws	VAUTID 60 (gamma)	tubular wire	high alloyed Fe, Cr, C, Mn	220 450*	10 45*
Abrasion Impact	crushing jaws, dredger teeth	VAUTID 40 (alpha)	stick electrode tubular wire	high alloyed Fe, Cr, C, Mo	600	54
Corrosion	sealing surfaces, impact bars, hammers for crushers	VAUTID 70 (delta)	stick electrode tubular wire	high alloyed Fe, Cr, C, Ti	650	57
	cone crushers, pick ham- mers, dredger teeth	VAUTID 80	tubular wire	high alloyed Fe, Cr, C, Mo	600	54
	top layer for hammers, excavator teeth, mixing blades	VAUTID 143	stick electrode tubular wire	high alloyed Fe, Cr, C, Nb	800	63
Abrasios Impact	screws, scrapers, mixer blades, chainwheels, top layer for teeth tips, crusher jaws	VAUTID 100	stick electrode tubular wire	high alloyed Fe, Cr, C	750	62
Lerresson lemperature	screws, dredging bucket front edges, sieves, stirrer blades, top layer for teeth tips and crushing rolls	VAUTID 100 Mo	tubular wire	high alloyed Fe, Cr, C, Mo	750	62
	conveyor screws, bucket teeth, crusher jaws, grin- ding rollers	VAUTID 105	tubular wire	high alloyed Fe, Cr, B	800	63
	hammers for crushers, punching tools, shearing blades, drill heads	VAUTID 110	stick electrode	high alloyed Fe, Cr, C, Mo, V	690	59
	screws, gravel pumps,- bunbury mixers	VAUTID 150	stick electrode tubular wire	high alloyed Fe, Cr, C, B	880	66

# **VAUTID** hardfacing welding programme on iron base


Forms of stress	Applications	VAUTID Type	Form	Alloy type	Hardness Vickers HV 30	Hardness Rockwell HRC
Abrasion Impact	sinter bars, coke pushers	VAUTID 100 T	stick electrode tubular wire	high alloyed Fe, Cr, C	750	62
Corresion Temperature	sinter crushers and bars	VAUTID 145	stick electrode tubular wire	high alloyed Fe, Cr, C, Mo, Nb, W, V	850	65
	furnace top bell facing, hot dust ducts, screens, sinter crushers, mixer components	VAUTID 146 Mining (VAUTID 176)	tubular wire	high alloyed Fe, Cr, C, V, Nb, B	850	65
	furnace top bell facing, hot dust ducts, screens, sinter crushers	VAUTID 147	stick electrode tubular wire	high alloyed Fe, Cr, C, Si, B	850	65
Abrasion Impact  O Temperature	mixer components for parts attacked by corrosion	VAUTID 100 C (VAUTID 100 K)	stick electrode tubular wire	high alloyed Fe, Cr, C, Ni, Mo	450	45

\*cold hardened \*cold hardened

# VAUTID hardfacing programme on tungsten carbide base

Forms of stress	Applications	VAUTID Type	Form	Alloy type	Hardness Vickers HV 30
Arrania Ingast	scrapers, edges of augers, hammers, drill bits, cutting tools, impact bars	VAUTID Ultra 303 (Ultra III)	coated wire	W2C in nickel matrix	matrix: 500 HV W2C-grain: 2000 HV
Common temperatur	scrapers, edges of augers, hammers, drill bits, cutting tools, impact bars	VAUTID Ultra 305 (Ultra V)	tubular wire	W2C in nickel matrix	matrix: 600 HV W2C-grain: 2000 HV
Abrasion Impact	edges of augers, rock drills, mixer blades	VAUTID Ultra 301 (Ultra I)	filled rod	W2C in iron matrix	matrix: 600 HV W2C-grain: 2000 HV
Corresion Temperature	scrapers, plough shares, grinding segments	VAUTID V Ultra 302 (Ultra II)	stick electrode	W2C in iron matrix	matrix: 850 HV W2C-grain: 2000 HV
	scrapers, plough shares, grinding segments	VAUTID V Ultra 304 (Ultra IV)	tubular wire	W2C in iron matrix	matrix: 850 HV W2C-grain: 2000 HV

VAUTID ■ DEPOSITION WELDING MATERIALS ■ 10 I 11

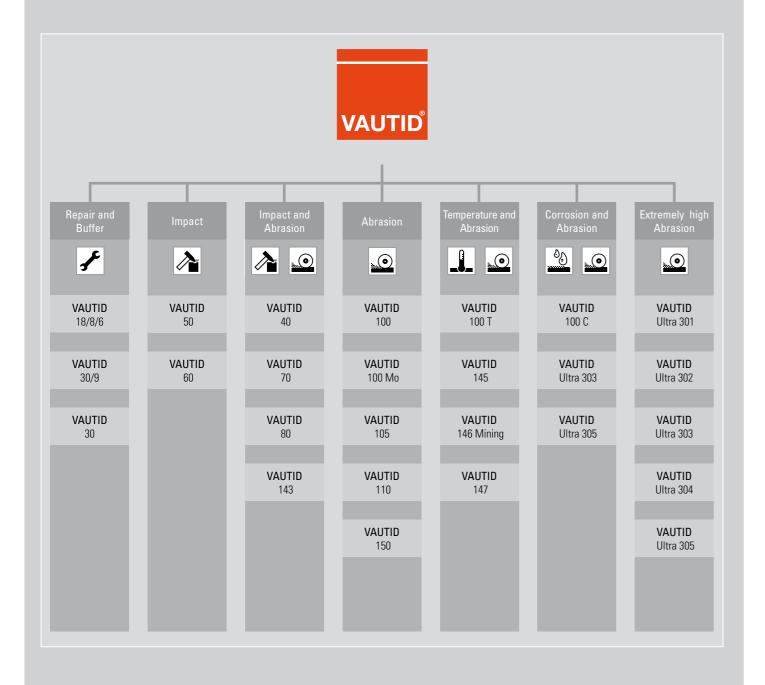





VAUTID hardfacing material as stick electrodes


VAUTID hardfacing material as tubular wire



VAUTID tubular wire production



VAUTID tubular wire (barrels)

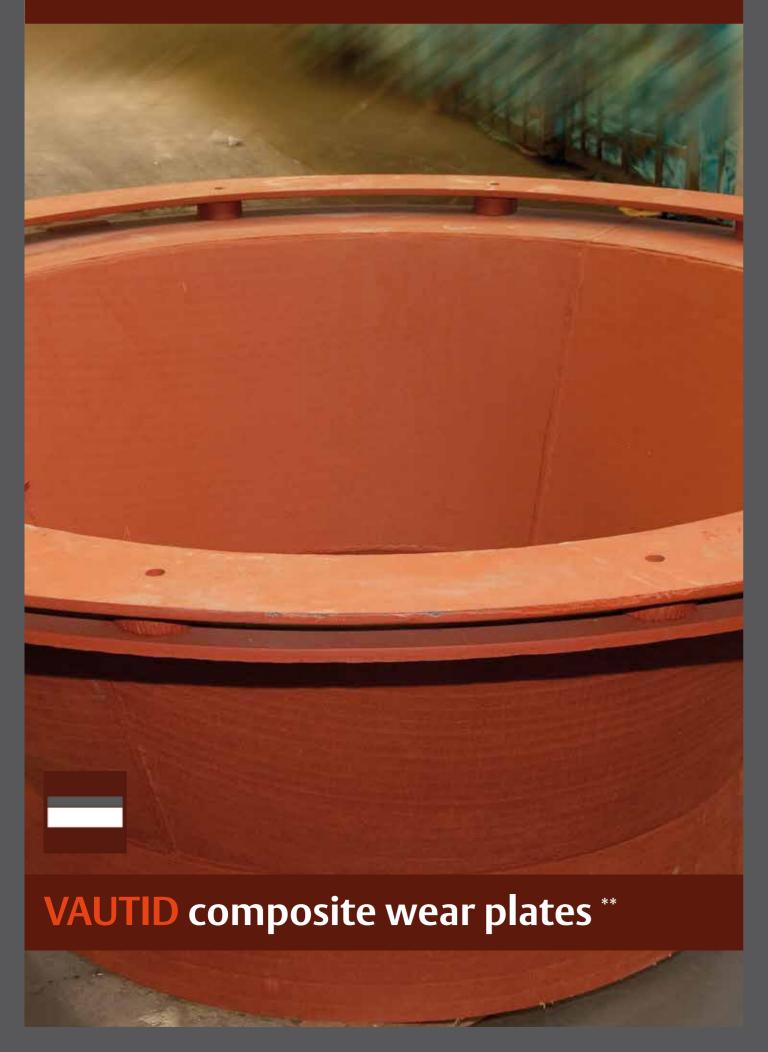

VAUTID products employ efficient technologies to help extend the service life of system and machine parts subject to heavy loads. Universal composite wear plates provide robust wear protection and ensure low wear costs over the long term.

Advantages. VAUTID composite wear plates are wear-proof and long-lasting. The hard-surface layer can be made to suit the specific application. The plates are also easily installed through back-side welding or bolting. Composite plates are available in a variety of dimensions and qualities. Plates can be cut to size to conform to drawings and heated or cooled to attain the desired shape – for extremely cost-effective and fast wear solutions in a wide variety of applications and industries.

With its extensive product portfolio designed for a wide variety of individual wear issues, VAUTID is the world's leading specialist in comprehensive wear protection.

VAUTID composite wear plates can be individually installed and are extremely long-lasting

**Fields of application.** VAUTID composite wear plates are used where wear protection is desired as a self-supporting structure on large surface areas with no supporting substructure. They guarantee maximum operational reliability, even under high mechanical load. Sample applications include strainers, hopper linings, vibration conveyors, fan impellers, casings, mixers, cyclone separators, and sifters.

\*\* VAUTID VVP Composite Wear Plates in India shall be sold by our JV company M/s. VAUTID SHAH HARDFACE Pvt. Ltd. only, however you may send your valuable enquiries to VAUTID INDIA as well.







VAUTID wear plate

## **VAUTID** wear plates – available forms and shapes

#### 1. Standard sheets and thicknesses (mm)

#### Coated surface

2.400 x 1.150 2.900 x 1.400 from 3+3 from 5+3 to 25+5/20+10 to 25+5/20+10

Corrosion resistant steels (e.g. 1.4301...)

#### Base materials

Steels (e.g. 1.0038, 1.0570)
Fine grain steels (e.g. 1.89 ...)
Hot steels (e.g. 1.7335 ...)
Heat resistant steels (e.g. 1.4878 ...)



# 3. Plates cut to size

from 50 x 50 mm
square boring from 4 x 4 mm
circular boring from Ø 3 mm
tear shape boring from Ø 3 mm
slots from 1.5 mm



#### 4. Formed plates

Simple cold forming is possible only with VAUTID wear plates because of their low dilution between weld deposit and base material.

The smallest cold-rolled diameter is 400 mm.



2. Special sizes

Up to largest sizes of 1.900 x 3.900 mm

from 6+4 to 25+5/

20+10 mm

#### 5. Installation-ready fabrications

- Pipes from 400 mm Ø
- Screens with different perforations
- Chutes
- Cyclones
- Elbows
- Troughs
- Distribution chutes
- Ventilators etc.



## **VAUTID** wear plates \*\*

#### Qualities of VAUTID wear plates

#### Weld deposit analyses

VAUTID wear plates are produced in the following qualities Hardness according to DIN 32525-4


Qualities	Hard materials	Binderphase	Binderalloys	Hardness in Vickers	Applications
VAUTID 100	Chromium Carbides	Fe/Austenite	Mn	pure weld deposit ca. 700 HV 10	linings of ventilators, separators, cyclones, linings of mills in the cement and coal industry, screens in the iron and steel industry
VAUTID 100T	Chromium Carbides	Fe/Austenite	Ni, Mn	pure weld deposit ca. 700 HV 10	linings of fans for operating temperatures up to 550 °C, screens in the iron and steel industry for operating temperatures up to 550 °C
VAUTID 130	Chromium + Boron carbides	Fe/Austenite	B, Mn	pure weld deposit ca. 750 HV 10	security and safe plates
VAUTID 143	Chromium + Niobium carbides	Fe/Austenite	Mn	pure weld deposit ca. 750 HV 10	chutes for open pit mining equipment, conveyor chutes, ventilators
VAUTID 145	Chromium Nb, W, V carbides	Fe/Austenite	B,Mn	pure weld deposit ca. 820 HV 10	hot gas ventilators, hot screens for temperatures up to 750 °C, hot dust pipes and bell linings
VAUTID 146- Mining	Chromium Nb, V, V-carbides	Fe-base Austenite	В	pure weld deposit ca. 940 HV 10	chutes, sieves, fans, fan housings, grids, discharge, tables, bell linings, separators, converters, etc.
VAUTID 147	Chromium carbides	Fe/Austenite	B, Mn	pure weld deposit ca. 900 HV 10	hot gas ventilators, hot screens for temperatures up to 800 ° C, hot dust pipes and bell linings
VAUTID 150	Chromium + Chromium car- bides	Fe/Austenite	B, Mn	pure weld deposit ca. 750 HV 10	pipework in the cement industry, dust and ash pipes with very smooth surface


\*\* VAUTID VVP Composite Wear Plates in India shall be sold by our JV company M/s. VAUTID SHAH HARDFACE Pvt. Ltd. only, however you may send your valuable enquiries to VAUTID INDIA as well.



VAUTID wear plates

VAUTID ■ COMPOSITE WEAR PLATES ■ 16 I 17

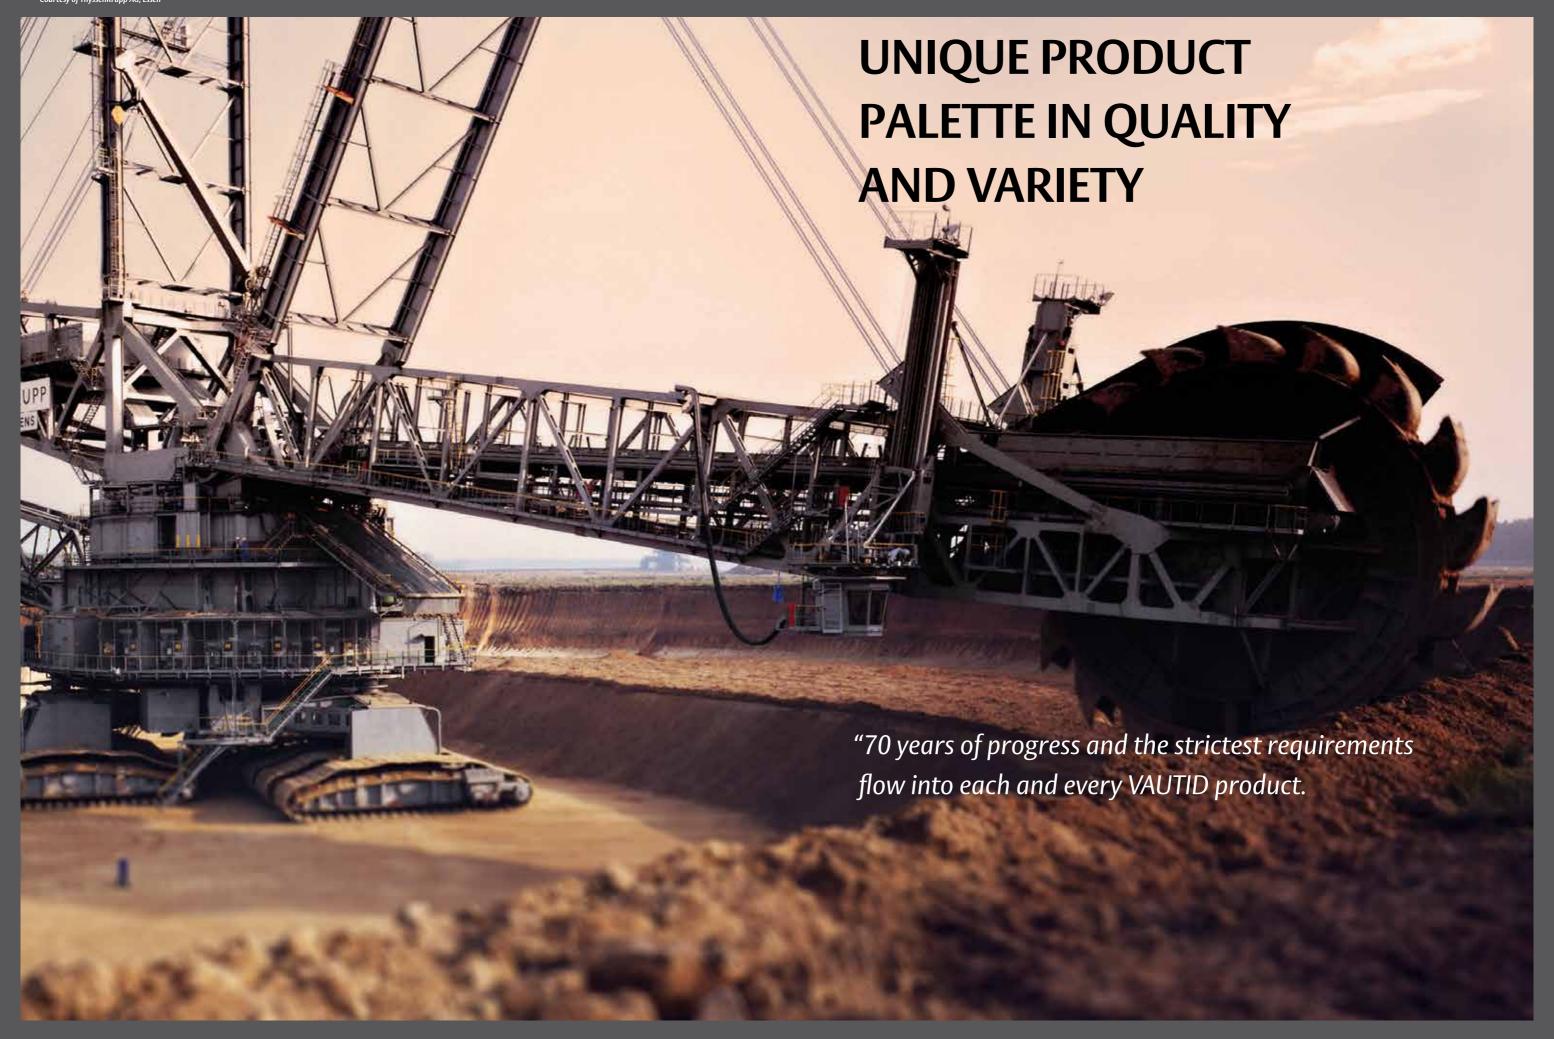

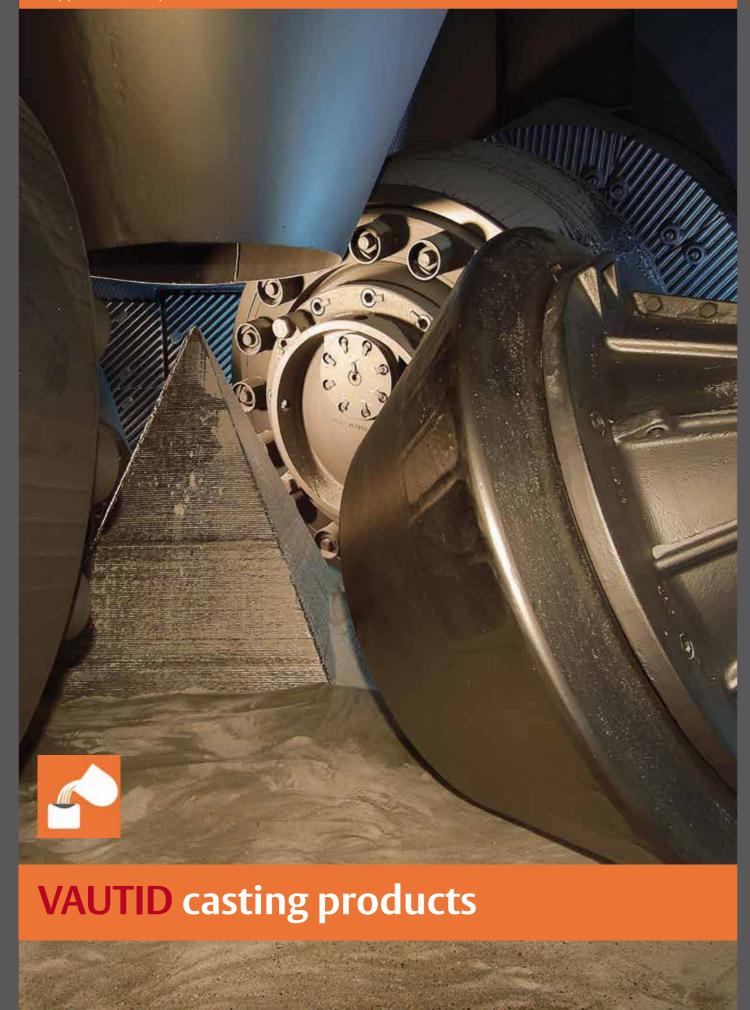

VAUTID offers a custom-tailored and cost-efficient solution for every requirement. Casting products are manufactured in accordance with customer needs using a wide variety of materials and casting methods. Optimized geometry combined with additional wear protection is a valuable asset in many applications.

Advantages. VAUTID casting components represent the most cost-efficient method of wear prevention for mass production. Casting products can range in weight from 2 to 30,000 kg depending on the field of application and the type of material. Applications include sand casting, ceramic or Croning molds or lost foam casting. Models, computer simulations and extensive analyses ensure the optimal quality of each component. VAUTID casting products can also be machined directly in the plant to the desired level of precision.

Highly wear-resistant
VAUTID components
offer the most advanced
wear protection for both
original and replacement
equipment from an
innovation leader.

VAUTID casting provides cost-efficient wear protection for series parts

**Fields of application.** VAUTID hard casting offers highly streamlined production and high-quality wear protection through strict VAUTID quality controls and is ideal for use in a wide variety of industries that contain mechanical processes like crushing, mixing, conveyance, storage, agglomeration, and separation.

#### **VAUTID** foundries

VAUTID is an experienced partner in component manufacturing for high carbon and stainless steel casting. VAUTID casting products are manufactured and processed in accordance with customer specifications.



VAUTID casting process



VAUTID wear resisting casting for the concrete industry

#### **VAUTID** foundries

#### **Moulding lines**

moulding line	600 x 700 mm	green sand
moulding line	1.100 x 1.200 mm	furan resin sand
moulding line	2.000 x 3.000 mm	furan resin sand
moulding line	2.000 x 4.000 mm	furan resin sand
jolt sqeeze pinlift moulding	1.100 x 1.200 mm	green-/furan resin sand
hand moulding	max. 4.000 x 5.000 mm	furan resin sand
lost foam	2.000 x 2.000 mm	sand

#### **Melting furnaces**

500 – 10.000 kg	capacity
300 – 3.500 kg/h	melt capacity

#### **Materials**

- 1. Non-alloyed cast steel for general applications (DIN EN 10293)
- 2. Low-alloyed cast steel for general applications (DIN EN 10293)
- 3. Heat resistant cast steel for pressure vessels (DIN EN 10213)
- 4. Tough and hard cast steel
- 5. Austenitic manganese steel
- 6. Heat-resistant cast iron (DIN EN 10295)
- 7. Stainless cast steel (SEW 410, DIN EN 10213)
- 8. Chilled iron (DIN EN 12513)
- 9. VAUTID Chilled iron
- 10. Ceramic composite casting

#### **Moulding process**

# Individual and mass production of castings with the following moulding processes

- Green sand
- CO<sub>2</sub> sand
- Furan sand
- Lost Foam
- Hotbox (croning)Lost-wax process
- CAD

#### Continual use of CAD supported development and production possibilities for the pattern shop

- Design: 2D/3D-CATIA V 5, Solidworks
- Moulding fill simulation: Flow cast
- Solidification simulation: Solid cast
- Rapid Prototyping: Selective laser sintering (SLS)

Pattern shop

# Manufacture of patterns in own pattern shop out of

- Metal
- Wood
- \_. . . . .
- Polystyrol

#### Plastics

. ..,..,...

### Quality control

Lot sizes

1 to 150.000/a

**Casting weights** 

2 - 30.000 kg

#### **Testing possibilities**

- Verify of dimensional accuracy

- Own heat treatment at all locations

tests at all locations

- VAUTID wear-test lab


- Own lab for melting analysis and material

- Chemical Analysis
- Hardness (HB, HRC, HV)
- Microstructure
- Tensile strength
- Elongation
- Impact bending strength
- Magnetic powder testing method
- Ultrasonic testing
- Wear tests
- Calcination test
- Destroying test

## Applications casting products, special mechanical engineering, recycling



Bi-metal hammer

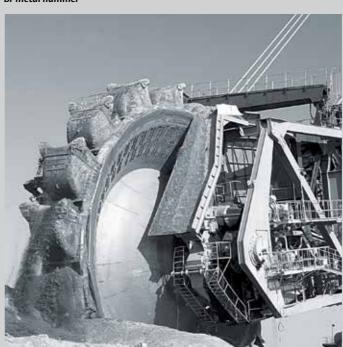

Crawler elements on excavator for open pit mining



ate bars in waste incineration



Glass recycling; impact crusher for crushing of ceramics

# **VAUTID Material Program, Casting Products**

Material Program			Mechanical Pro							
VAUTID Materials	Tensile strength	Yield strength	Enlongation after	Hardness acc.	KV	Temperature	Condition of delivery	Weldability	Applications	Forms of stress
	N/mm²	N/mm² min.	fracture (Lo=5d) min.	HB (HRC)	ISO-V Trial J min.	°C				
n-alloyed cast steel for general	applications (DIN EN 1	0293)								
VAUTID GE200 – 1.0420	300 – 530		25	130 – 140	27	RT	N	good	for mechanical engineering and steel structural work	Anner Legel
VAUTID GE240 – 1.0446	450 — 600	240	22	140 – 170	27	RT	N	good		<u> </u>
VAUTID GE300 – 1.0558	520 – 670	300	18	150 – 190	31	RT	N	_		Ceresies Temperature
v-alloyed cast steel for general	applications (DIN EN 1	0293)							· · ·	
VAUTID G17Mn5 – 1.1131	450 – 600	240	24	130 – 190	27 / 70	-40 / RT	QΤ	good	for pressure vessel	
VAUTID G28Mn6 – 1.1165	520 – 870	260 - 550	10 – 18	150 – 190	27 – 35	RT	N, QT1, QT2	good	for mechanical and plant engineering	Alminis linguet
/AUTID G26CrMo4 – 1.7221	550 - 850	300 – 550	10 – 16	160 – 250	18 – 40	RT	QT1, QT2	preheating + after heat treatment	for mechanical and plant engineering	Commin Temperature
/AUTID G34CrMo 4 – 1.7230	620 - 980	330 - 650	10 – 12	180 – 250	16 – 35	RT	QT1, QT2	preheating + after heat treatment	for mechanical and plant engineering	Cervaies Temperature
/AUTID G42CrMo4 – 1.7231	650 — 1.000	350 – 700	10 – 12	190 – 290	16 – 31	RT	QT1, QT2	preheating + after heat treatment	for mechanical and plant engineering	
at resistant cast steel for pressu	re vessel (DIN EN 1021	3)								
VAUTID GP240 GH – 1.0619	420 – 600	240	22	120 – 190	27 – 40	RT	N, QT	good	for pressure vessel	Anus Input
AUTID G17CrMo5-5 – 1.7357	490 – 690	315	20	140 – 200	27	RT	QΤ	preheating + after heat treatment	for turbins, pressure vessel, steam boiler	Depart   Dep
AUTID GXCrNi 13-4 – 1.4317	760 – 960	550	15	220 – 280	27	RT	QΤ	preheating + after heat treatment	for pressure vessel	Coroulas Temperature
gh and hard cast steel										Abrains lapact
UTID GS55NiCrMoV7 – 1.2714	-	-	-	min. 42 HRC	-	-	ΩT	limited	for hammer in the size reduction technics	Abrasian Impact
UTID GX37CrMoV5-1 – 1.2343	-	-	-	min. 48 HRC	-	-	ΩT	limited	for hammer in the size reduction technics	Etemen September
stenitic manganese steel										from to
VAUTID M12 – 1.3403	-	-	-	-	-	=	AT	good	for crusher jaw, crushing cone	Abrailes bayer
VAUTID M18-3	-	-	-	-	-	-	AT	good	for crusher jaw, crushing cone	Abrasise Supert Abrasis Supert
VAUTID M20-3	-	-	-	-	-	-	AT	good	for crusher jaw, crushing cone	Correios Temperature Correios Temperature
at resistant cast iron (DIN EN 10	295)									
VAUTID H – 1.4729	-	-	-	max. 300	-	-	Wb4 / 800 - 850	preheating + stress relieve heat treatment	for industrial furnace engineering up to 850 ° C on air	
VAUTID H – 1.4743	-	-	-	d	-	-	G	preheating + stress relieve heat treatment	for industrial furnace engineering up to 900 °C on air	from to
VAUTID H – 1.4776	-	-	-	d	-	-	G	preheating + coolant in furnace	for industrial furnace engineering up to 1.150 °C on air	
VAUTID H – 1.4777	-	-	-	d	-	-	G	preheating + coolant in furnace	for stirring teeth up to 1.100 °C on air	
VAUTID H – 1.4823	min. 550	min. 250	3	d	-	-	G	good	for industrial furnace engineering up to 1.100 °C on air	Carrosian Temperature Cerrosian Temperature
VAUTID H – 1.4825	min. 450	min. 230	15	-	-	-	G	good	for industrial furnace engineering up to 900 $^{\circ}\text{C}$ on air	
VAUTID H – 1.4826	min. 450	min. 230	8	-	-	-	G	good	for industrial furnace engineering up to 950 $^{\circ}\text{C}$ on air	
VAUTID H – 1.4837	min. 450	min. 220	6	-	-	-	G	good	for industrial furnace engineering up to 1.150 °C on air	
VAUTID H – 1.4848	min. 450	min. 220	8	-	-	-	G	good	for industrial furnace engineering, petroleum and natural gas plants up to 1.100°C on air	
inless cast steel (SEW 410, DIN	EN 10213)									
VAUTID K – 1.4086	-	-	-	260 – 330	-	-	G	preheating + coolant in furnace	for food technique, chemical industry	
VAUTID K – 1.4308	440 – 640	200	30	-	60	RT	AT	good	for accessories, mechanical engineering	
VAUTID K – 1.4312	-	-	-	-	-	-	AT	good	for pump construction	
VAUTID K – 1.4313	540 — 800	355 – 500	16 – 18	-	40 – 45	RT	AT	good	for pressure vessel	Ansate laget
VAUTID K – 1.4404	490 — 690	190	40	-	-	RT	AT	good	for pressure vessel	America Support  Commission Temperature
VAUTID K – 1.4464	-	-	-	230 – 300	-	-	G	preheating + heat treatment	for chemical industry, flue gas desulfurization	Correction Temperature
VAUTID K – 1.4517	650 - 850	480	22	-	50	RT	AT	good	for pressure vessel, chemical industry	
VAUTID K – 1.4529	440 – 460	180	20	-	60	RT	AT	good	for pressure vessel	
VAUTID K – 1.4552	440 – 460	200	25	-	40	RT	AT	good	for pressure vessel, chemical industry	
	440 – 660	210	25	_	40	RT	AT	good	for pressure vessel, chemical industry	
\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	VAUTID GE200 – 1.0420  VAUTID GE200 – 1.0446  VAUTID GE300 – 1.0558  W-alloyed cast steel for general  VAUTID G17Mn5 – 1.1131  VAUTID G28Mn6 – 1.1165  VAUTID G26CrMo4 – 1.7221  VAUTID G34CrMo4 – 1.7230  VAUTID G42CrMo4 – 1.7231  VAUTID G77CrMo5 – 1.7357  VAUTID G77CrMo5 – 1.7357  VAUTID G77CrMo5 – 1.7357  VAUTID GS55NiCrMoV7 – 1.2714  AUTID GX37CrMoV5 – 1 – 1.2343  VAUTID M12 – 1.3403  VAUTID M12 – 1.3403  VAUTID M12 – 1.3403  VAUTID M12 – 1.3403  VAUTID M12 – 1.4743  VAUTID H – 1.4729  VAUTID H – 1.4743  VAUTID H – 1.4777  VAUTID H – 1.4825  VAUTID H – 1.4826  VAUTID H – 1.4837  VAUTID H – 1.4848  VAUTID H – 1.4848  VAUTID K – 1.4312  VAUTID K – 1.4313  VAUTID K – 1.4404  VAUTID K – 1.4404  VAUTID K – 1.4464  VAUTID K – 1.4517  VAUTID K – 1.4529	N/mm²  VAUTID GE200 – 1.0420 300 – 530  VAUTID GE240 – 1.0446 450 – 600  VAUTID GE300 – 1.0558 520 – 670  W-alloyed cast steel for general applications (DIN EN 1  VAUTID G17Mn5 – 1.1131 450 – 600  VAUTID G28Mn6 – 1.1165 520 – 870  VAUTID G28CrMo4 – 1.7221 550 – 850  VAUTID G34CrMo 4 – 1.7231 650 – 1.000  VAUTID G34CrMo4 – 1.7231 650 – 1.000  VAUTID G77CrMo5-5 – 1.7357 490 – 690  VAUTID G77CrMo5-5 – 1.7357 490 – 690  VAUTID GX7CrNi 13-4 – 1.4317 760 – 960  VAUTID M12 – 1.3403 –  VAUTID M12 – 1.3403 –  VAUTID M18-3 –  VAUTID M18-3 –  VAUTID M19-3 –  VAUTID H – 1.4743 –  VAUTID H – 1.4825 min. 450  VAUTID H – 1.4826 min. 450  VAUTID H – 1.4826 min. 450  VAUTID H – 1.4848 min. 450  VAUTID K – 1.4308 440 – 640  VAUTID K – 1.4308 440 – 640  VAUTID K – 1.4303 540 – 800  VAUTID K – 1.4303 540 – 900  VAUTID K – 1.4308 440 – 640  VAUTID K – 1.4308 440 – 640  VAUTID K – 1.4313 540 – 800  VAUTID K – 1.4404 490 – 690  VAUTID K – 1.4529 440 – 460	N/mm² N/mm² min.  Non-alloyed cast steel for general applications (DIN EN 10293)  VAUTID GE200 – 1.0420 300 – 530 200  VAUTID GE240 – 1.0446 450 – 600 240  VAUTID GE300 – 1.0558 520 – 670 300  W-alloyed cast steel for general applications (DIN EN 10293)  VAUTID G17Mn5 – 1.1131 450 – 600 240  VAUTID G28Mn6 – 1.1165 520 – 870 260 – 550  VAUTID G26CrMo4 – 1.7221 550 – 850 300 – 550  VAUTID G34CrMo 4 – 1.7230 620 – 880 330 – 650  VAUTID G42CrMo4 – 1.7231 650 – 1.000 350 – 700  val resistant cast steel for pressure vessel (DIN EN 10213)  VAUTID GP240 GH – 1.0619 420 – 600 240  VAUTID G77 Mo5-5 – 1.7357 490 – 690 315  VAUTID GX57CrMo4 – 1.2714 – –  AUTID GX37CrMo45-1 – 1.2343 – – –  VAUTID M12 – 1.3403 – – –  VAUTID M12 – 1.3403 – – –  VAUTID M12 – 1.3403 – – – VAUTID M12 – 1.3403 – – – VAUTID M12 – 1.3403 – – – VAUTID M12 – 1.3403 – – – – VAUTID M12 – 1.3403 – – – – VAUTID M12 – 1.3403 – – – – – – – – – – – – – – – – – – –	N/mm²   N/mm² min.   fracture (Lo=5d) min.   m-alloyed cast steel for general applications (DIN EN 10293)	N/mm²   N/mm²   N/mm²   min.   fracture (Lo=5d) min.   HB (HRC)	N/mm²   N/mm²   N/mm² min.   fracture (La-5d) min.   HB (HRC)   ISO-V Trial J min.	Nimer   Nimer   Nimer   Nimer   Nimer   Institute (Lo-Sid) min.   HB (HRC)   150-V Trial J min.   *C	Nimer   Nime	All marker   All	No.     No.     No.     No.     No.   No

 $RT = room\ temperature,\ N = normalising,\ G = as\ cast,\ QT,\ QT1,\ QT2 = quenched\ and\ tempered,\ AT = solution\ annealing$ 

VAUTID ■ CASTING PRODUCTS ■ 24125

	Material Program			Mechanica	al Properties b)					
No.	VAUTID Materials	Tensile strength	Crushing	E-Modul [kN/	Hardness	Fracture toughness	Machinability	Condition of delivery	Weldability	Applications
		N/mm²	strength N/mm²	mm²]	(HRC)	Kic [kN/mm²]				
7. VAUTIO	Materials for recycling industry									
1	VAUTID R1	-	-	-	min. 52	-	-	QΤ	limited	for impact crusher
2	VAUTID R2	-	-	-	min. 55	-	-	QΤ	limited	for impact crusher
3	VAUTID R3	-	-	-	min.55	-	-	QΤ	limited	for impact crusher, rotary crusher
4	VAUTID R4	-	-	-	min. 42	-	-	QΤ	limited	scrap metal crusher and shredders
9. VAUTIE	O Chilled iron (DIN EN 12513)									
1	GJN-HV520 - 0.9620	_	_	_	approx. 52	_	_	G	not allowed	abrasion stressed castings
·	+similar Ni-Hard 1)				арргох. 32			Ü	not unovou	สมาสิงโอกิ จิน 6556น อินจินกฤช
2	GJN-HV600(XCr18) - 0.9645	_	_	_	approx. 55	_	_	G/hardened	not allowed	abrasion and impact stressed castings
2	(similar Ni-Hard 4)				арргох. 33			dynardened	not anowed	abrasion and impact successed casungs
IO. VAUTI	D chilled iron (own developments)									
1	VAUTID W3	450 - 800	620 - 750	165 – 180	approx. 58	-	no	G	not allowed	for linings, mixer tools
3	VAUTID W4	450 - 800	620 - 750	165 – 180	approx. 52	-	no	G	not allowed	for linings, mixer tools
5	VAUTID W7	600 – 1.000	2.800 - 3.200	158 – 190	approx. 59	25 – 31	yes	hardened	not allowed	for pump elements, hammer
6	VAUTID W72	600 - 1.000	2.800 - 3200	158 – 190	approx. 59	25 – 31	yes	hardened	not allowed	for pump elements, hammer
7	VAUTID W72H	600 - 1.000	2.800 - 3.200	158 – 190	approx. 59	25 – 31	yes	hardened	not allowed	for impact bars, hammer
8	VAUTID W73	600 - 1.000	2.800 - 3.200	158 – 190	approx. 59	25 – 31	no	hardened	not allowed	for impact bars, hammer
12	VAUTID W78A	600 - 1.000	2.800 - 3.200	158 – 190	approx. 62	-	no	hardened	not allowed	for impact bars, linings
16	VAUTID W100	450 - 800	1.800 - 2.800	150 – 170	approx. 59	25 – 31	no	G	not allowed	for brick industry

## **Applications Casting Products**

# Crushing



Sinter breaker star steel industry



further material developments according to customer requirements b) Mechanical Properties are refence values depending of geometry and cross section of components



Hammer for rock crushing



Impact bars for crushers

#### Mixing



Mixer blade for planet mixer



Mixing tools for double-shaft mixer

#### Conveying

G = as cast



VAUTID S-tube

# **VAUTID GROUP.** Maintaining a Local Presence Worldwide.



VAUTID INDIA Private Ltd. Pune (India)
VAUTID INDIA Private Ltd. Pune (India)
VAUTID-SHAH HARDFACE Mumbai (India)
VAUTID (Shanghai) Wear Resistent Material Trading Co. Ltd. (P.R. China)
VAUTID & HUIFENG (Wuhu) Ltd. Wear Resistent Material Co Ltd. Wuhu (P.R. China)
VAUTID & YAOYU (Zhangjiagang) Wear Resistant Material Co. Ltd. (P.R. China)
VAUTID ARABIA Coating and Treatment of Metals LLC Ras Al Khaimah (U.A.E.)
VAUTID GmbH Rep. Office Indonesia Jakarta (Indonesia)

Reliability through strong partnership. The VAUTID GROUP is represented by subsidiaries and agencies in over 40 countries. VAUTID employees and distribution specialists worldwide are committed to employing the highest standards in pursuing a common goal: developing custom system solutions for excellent wear protection.

VAUTID GROUP Brunnwiesenstraße 5 D-73760 Ostfildern-Ruit Po.Box 4110 D-73744 Ostfildern-Ruit Phone: +49 711 4404-0 Fax: +49 711 4420-39 vautid@vautid.com www.vautid.com