



RK ROSE+KRIEGER

A Phoenix Mecano Company

EMS – stainless steel mounting system

A fresh approach connection
to technology



EMS – stainless steel mounting system

A fresh approach to stainless steel connection technology

Smart stainless steel mounting system (EMS) for frame structures in the food industry and in clean rooms

Stainless steel is the material standard for installations in clean rooms, for filling, packaging and conveying systems in the food industry and for all areas which are at risk from corrosion. As a specialist for niche products for these fields, we have now developed stainless steel connection elements which can be used in conjunction with special clamping technology to assemble and disassemble frame structures made from square or round tubing in the common size 40 quickly, reliably and without the need for specialist knowledge.



Video
EMS How it works




Product benefits:

- Straightforward** – assembly without the need for specialist knowledge, using just one tool
- Quick** – considerable time savings thanks to assembly of pre-fabricated modules without reworking
- Flexible** – easy to assemble/disassemble and reusable
- Stable** – high-strength internal clamping mechanism
- Versatile** – available for round tubing and square tubing
- Available** – all components in stock and available for delivery
- With corrosion protection** – all individual parts made of stainless steel
- Sustainable** – suitable for mono-material recycling

Functional illustration


Stainless steel mounting system round:

By screwing in the threaded pins, the inner clamping mechanism is moved in parallel and a friction-locked tube connection is created, which is distributed over four contact points.

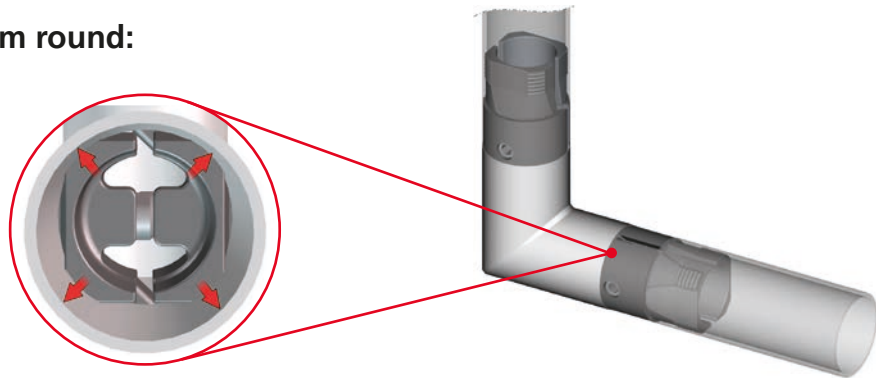

Stainless steel mounting system square:

By screwing in the grub screws, the internal mechanism is moved diagonally across an inclined plane, creating a friction-locked. The tube connection is distributed over four contact surfaces.

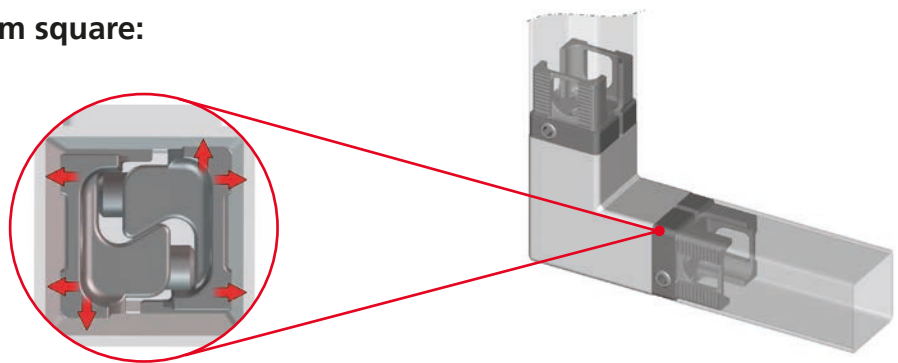

Technical data

Basic information / mechanical properties


- Stainless steel Elements EMS 1.4301 / 1.4308

Loads

Attention!

The data in the chart do not ensure a guarantee of quality or a warrant characteristic of our products. These are nonbinding standard values which might be not reached in individual cases due to the temperature or surface finish of the clamping profile.

Adh. force [N]: static pull

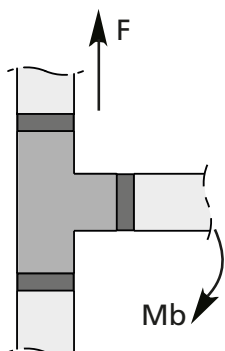

Bending moment Mb [Nm]

Version	Including static safety factor $v = 2$		Tightening torque of the clamping screws
	F [N]	Mb [Nm]	Nm
round	1568	77	15
square	1097	63	15

EMS – stainless steel mounting system

Overview

EMS round tube connectors



EMS WIT R 40



EMS WI R 40



EMS WIE R 40



EMS KI R 40




EMS FI R 40

Note:
The adjustable foot is not included
and must be ordered separately.




EMS WIT R 40

Code No.	Type	m [g]
11403653305	WIT R 40	1145

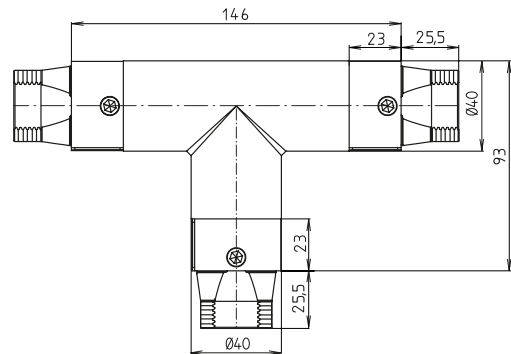


EMS WI R 40

Code No.	Type	m [g]
11403651305	WI R 40	780

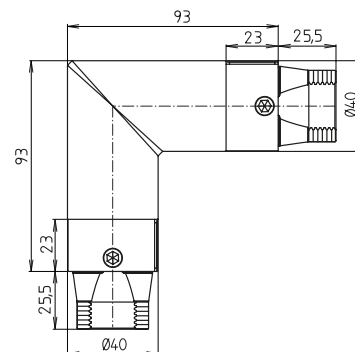

EMS WIE R 40

Code No.	Type	m [g]
11403652305	WIE R 40	1120

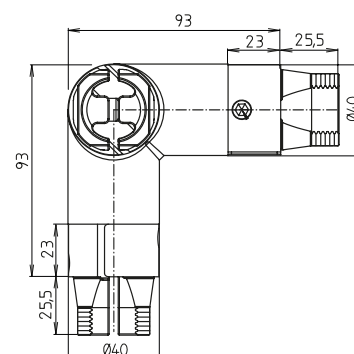


EMS – stainless steel mounting system




EMS KI R 40

Code No.	Type	m [g]
10403650305	KI R 40	1500

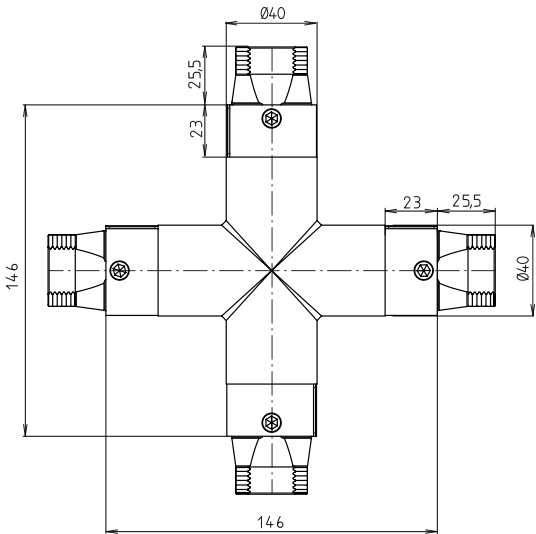

EMS FI R 40

Code No.	Type	m [g]
10403655305	FI R 40	548

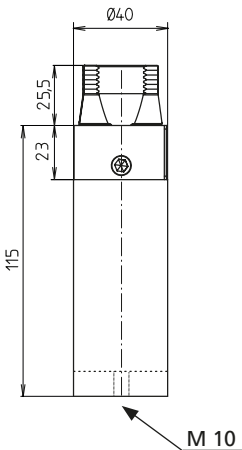

Note:
The adjustable foot is not included
and must be ordered separately.

Accessories

EMS round tube connectors



Stainless steel tube


Code No.	Type	m [g/m]
8040022	40x2	1870



every length is possible
max. 6000 mm


Notice:

Due to the manufacturing process, there may be differences in the gloss level of the tubes.




Screw-in adjustable foot stainless steel with vibration damper

Code No.	Type	m [g]
90603	M 10	152

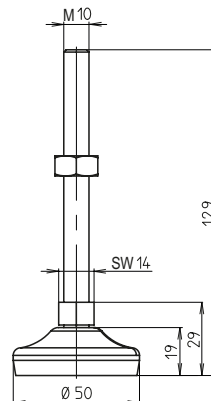

EMS connector R 40

Code No.	Type	m [g]
13403656305	Verb R 40	298



Overview

EMS square tube connectors



EMS WIT V 40



EMS WI V 40



EMS WIE V 40



EMS KI V 40




EMS FI V 40

Note:
The adjustable foot is not included
and must be ordered separately.




EMS WIT V 40

Code No.	Type	m [g]
11403643305	WIT V 40	1002

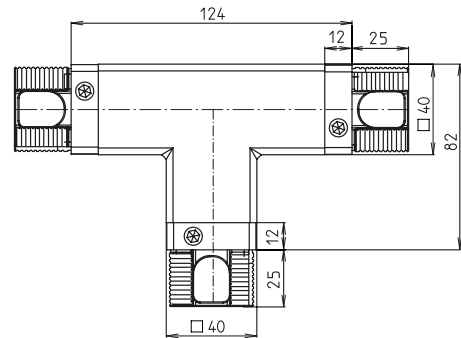


EMS WI V 40

Code No.	Type	m [g]
11403641305	WI V 40	695



EMS WIE V 40

Code No.	Type	m [g]
11403642305	WIE V 40	1002




EMS – stainless steel mounting system




EMS KI V 40

Code No.	Type	m [g]
10403640305	KI V 40	1308

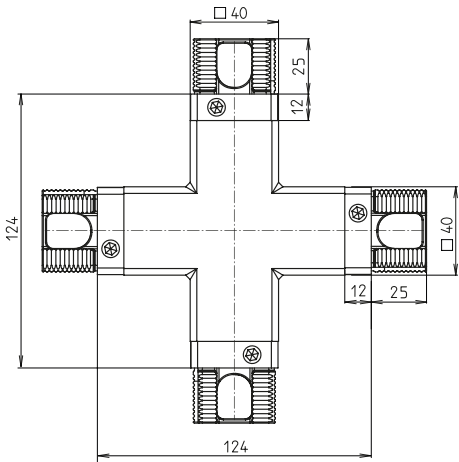

EMS FI V 40

Code No.	Type	m [g]
10403645305	FI V 40	545

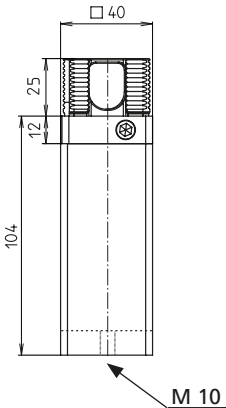

Note:
The adjustable foot is not included
and must be ordered separately.

Accessories


EMS square tube connectors



Edelstahlrohr


Code No.	Type	m [g/m]
8140022	40x2	2330

every length is possible
max. 5950 mm




Screw-in adjustable foot stainless steel with vibration damper

Code No.	Type	m [g]
90603	M 10	152

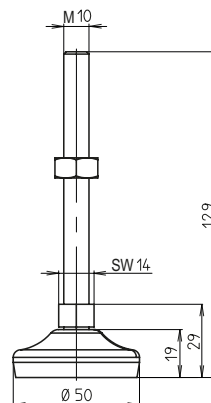

EMS connector V 40

Code No.	Type	m [g]
13403646305	V 40	236



RK Rose+Krieger GmbH
Verbindungs- und Positioniersysteme
Potsdamer Straße 9
32423 Minden, Germany
+49 571 9335-0
info@rk-online.de
www.rk-rose-krieger.com



More Informations