




benefits of pneumatic swivel-units of Wagner!

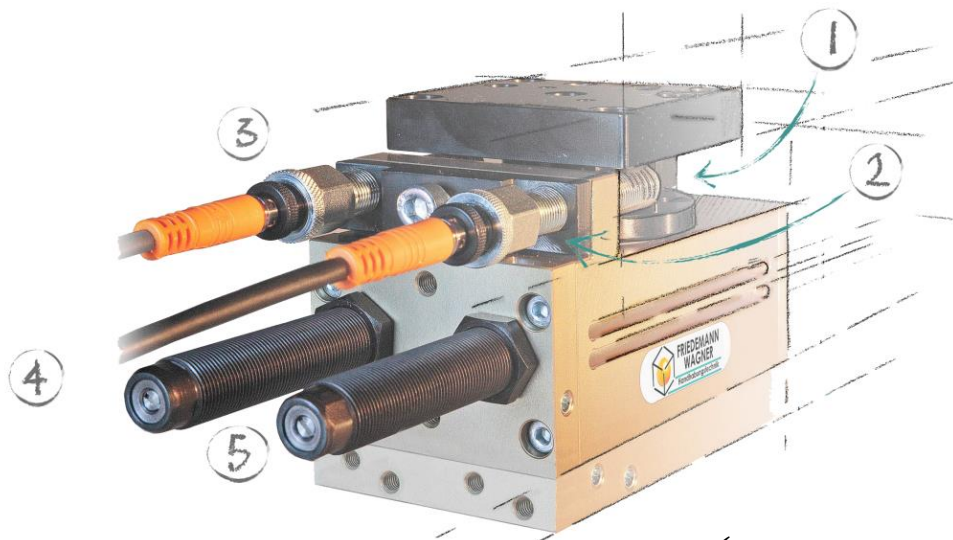

- ✓ turning angle 0-190°
- ✓ angle adjustable from outside
- ✓ screw + stop-block = stop surface

- ✓ external reproducible stop-positions
- ✓ full torque in end-positions
- ✓ stop-position independent from gear
- ✓ +/- 0,01° repeat accuracy

SCAN OR CLICK



...available as mini !

Qualität, die seit 1979 bewegt !



Rundschalteeinheiten



Lineareinheiten



Hubeinheiten



Greifeinheiten



Schwenkeinheiten






3

- ✓ space-saving: sensor inside stop-screw
- ✓ stop-screw + sensor are clamped via knurl
- ✓ enables detection of shock-absorber-failure

4

- ✓ dampers accessible from outside
- ✓ ideal for adjustment and maintenance
- ✓ damper only slows-down, stop is defined via screw!
- ✓ interfering edges point to only one side

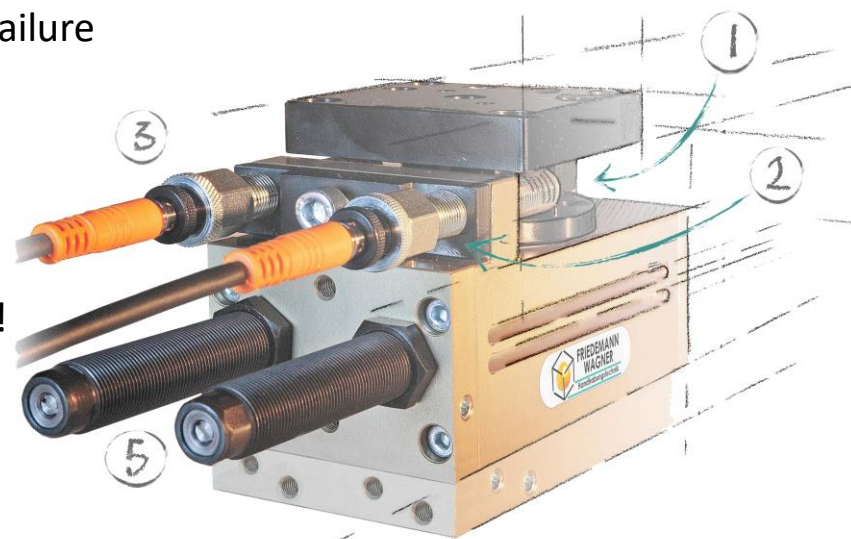


5

- ✓ air-grommets in rotating shafts available
- ✓ signal-grommets available $\geq$ SES-6

SCAN OR CLICK



link technical animation

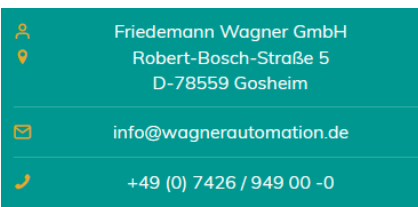

Friedemann Wagner GmbH | Robert-Bosch-Str. 5 | DE 78559 Gosheim | +49 (0)7426 94900 0

SCAN OR CLICK



link to brochure