



Solution Catalog

# SeGMo-System

Semi- and fully automated format adjustment



Motion sensors and integrated drive technology



*Finding solutions.  
Founding trust.*

Railroad rolling stock

**Packaging machines**

Machine tools

General mechanical engineering

Renewable energies

E-mobility

Maritime applications

# The SeGMO-System

## Increased productivity due to shorter format change times

Automation as well as system productivity have now reached such a high level in many industries that the time required for format changes and subsequent restarts accounts for a significant decline in value. Optimizing format change time is thus an important way of increasing productivity.

You too can automate your feed axes using our SeGMO-System! By simply incorporating it into your higher level control system, you increase system efficiency thus saving time and money.

Whether you have carton erectors, carton closers, wrap-around systems, packers, piece goods feeders or labelers: we offer you the right solution for your application for semi- or full automation.




### System advantages at a glance

- |  |  |  |   |
|--|--|--|---|
|  | Shorter setup times: High flexibility and productivity |  | Industrie 4.0: Intelligent Condition Monitoring |
|  | High process reliability with a fast ROI               |  | Batteryless system: Reduced life cycle costs    |
|  | UL certification: Simple export                        |  | Very high electromagnetic compatibility (EMC)   |



### Time saving and error prevention using the SeGMO-System

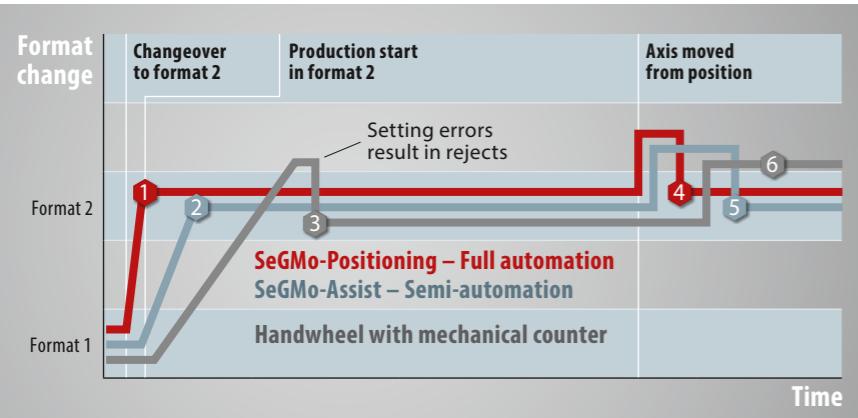


- 1 Direct production start
- 2 Delay: Waiting for personnel, walking distances between adjustments
- 3 Lengthy delay: Waiting for personnel, walking distances between adjustments, consulting setting values in documents, greater risk of setting errors
- 4 Automatic error correction
- 5 Checkback signal stops system, personnel can correct the error
- 6 Incorrect position remains unnoticed until reject occurs

## SeGMO-Assist

### Entry into the digitization of manual adjustment

If personnel is available anyway, a fully automated solution can be dispensed with, depending on the frequency of format adjustment. Manual adjustment and position monitoring using

the position display are simple from a technical aspect and are attractively priced, while at the same time offering high product quality and process reliability.

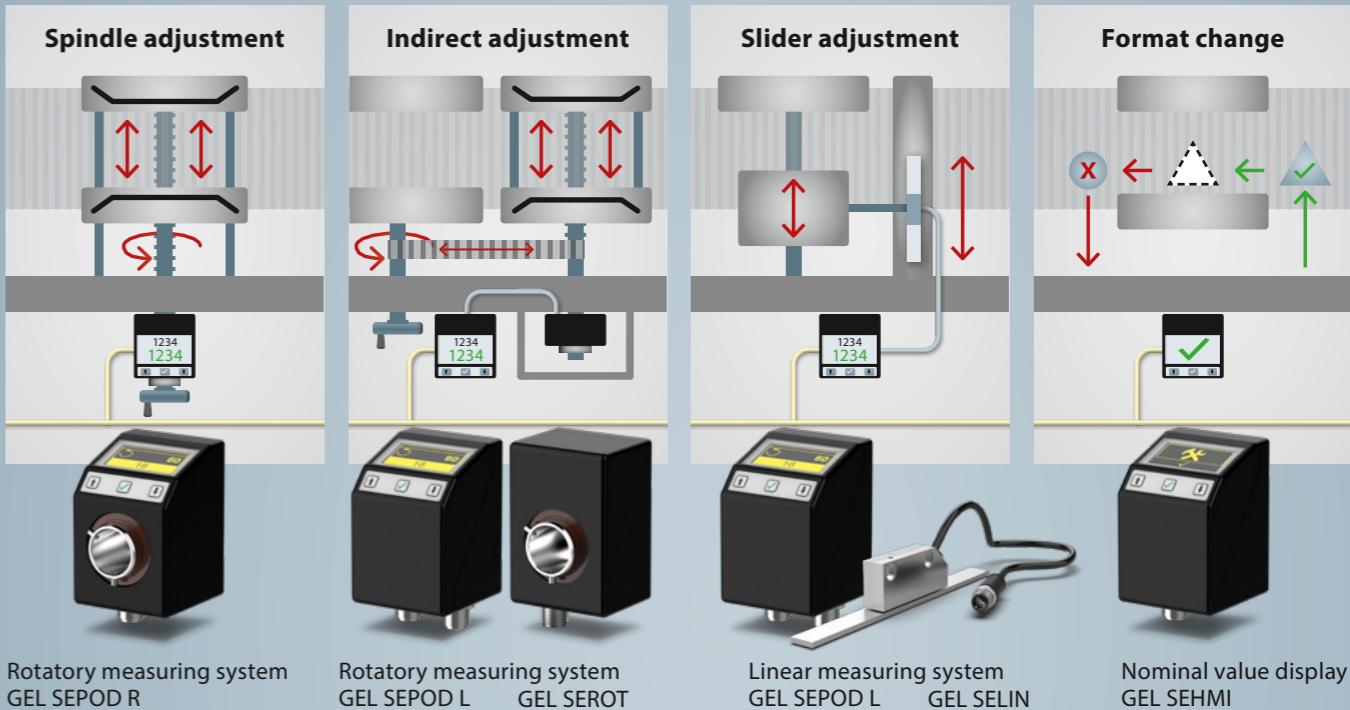


## SeGMO-Positioning

### For small batch sizes and high packaging variety

Short-term product changes require speed, reliability and flexibility. Reduce the setup times of your machine by setting the feed axes to fully automatic.

Full automation is also the solution if there is no personnel in the operating area of the feed axes or if systems in multi-shift mode are to be operated unstaffed at night.

#### Fully automated format change according to predefined formula – fast and safe

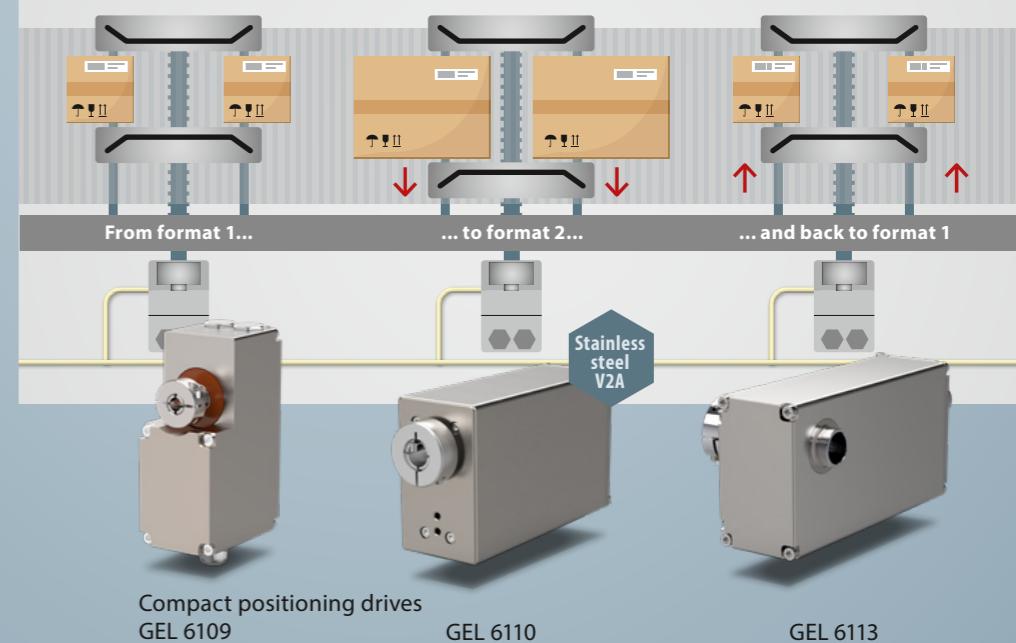

# SeGMO products

## Ideal solutions for all requirements

The SeGMO-System comprises the SeGMO-Assist digital position display, the SeGMO-Positioning drives and the SeGMO-Box decentral control unit for flexible fieldbus integration. This plug and play solution also includes the certified hybrid cables suitable for drag chains including their connectors.


The SeGMO-Assist position display facilitates manual adjustment procedures by displaying nominal and actual positions. Variants are available for rotary and linear applications. The pure nominal value display, without measuring system, supports when changing formats or tools, for example.

The SeGMO-Positioning drives are complete mechatronic systems with a batteryless absolute multiturn rotary encoder, gear and motor as well as integrated power and control electronics. With nominal torques of up to 18 Nm, they cover the typical power range for feed axes. The positioning drives can be integrated into the higher level control system with function blocks.

Alternatively, up to 17 feed axes can be automated via the decentral SeGMO-Box. The Box controls power management for the connected positioning drives and concentrates interaction with the higher level control system. In addition, up to 48 position displays can be connected to the modular SeGMO-Box. Combined operation of positioning drives and position displays is possible.



### High process reliability with a fast ROI

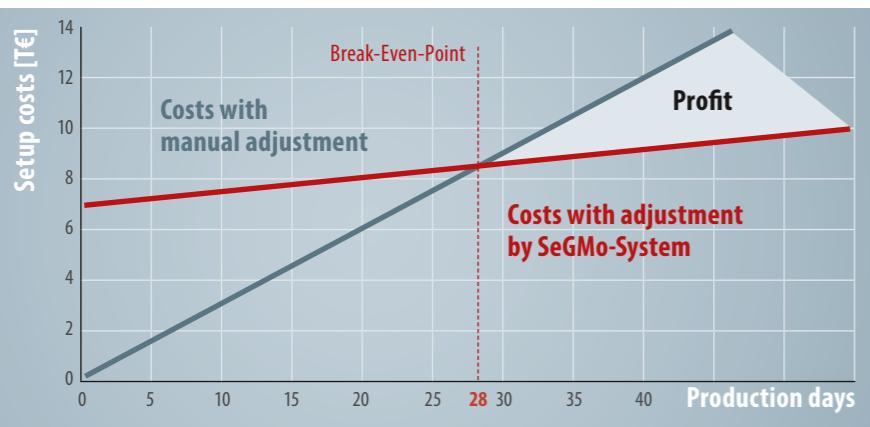


Due to the reduced setup times, the curve for the costs per automated format change is significantly flatter compared to the curve for manual adjustment. In the sample graph, the curves intersect after 28 days. At this point, the cost of manual format changes exceeds the total cost of the SeGMO-System. The investment has paid off.

## Standalone operation using the PLC

### System level

The function block library provided by Lenord+Bauer simplifies integration of the positioning drives and position displays in the PLC program.

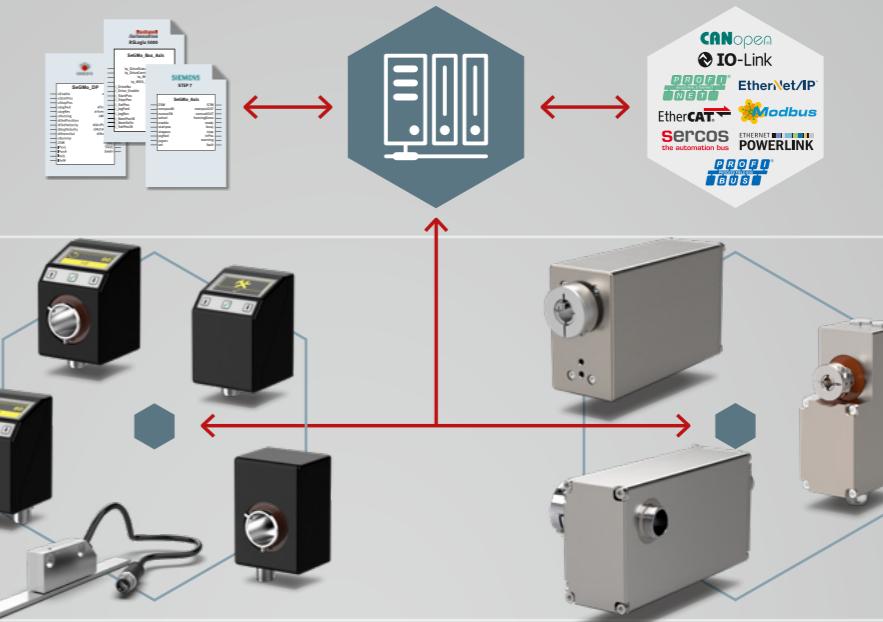


### Sensor-actuator level

Standalone versions with integrated fieldbus enable direct PLC integration.

## Industrie 4.0 using the SeGMO-Box – Single-cable technology

### System level

The function block library provided by Lenord+Bauer simplifies integration of the positioning drives and position displays in the PLC program.

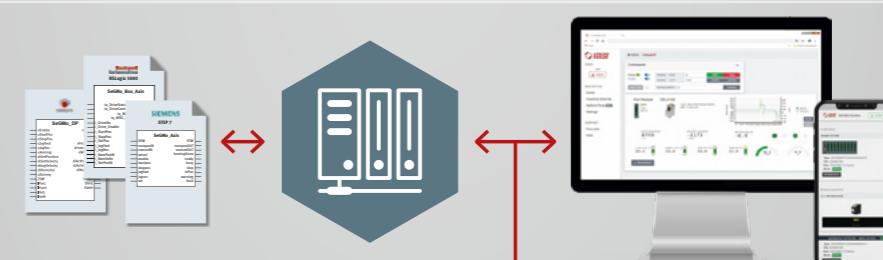

### Integration level

Standard IE fieldbuses are available via the modular SeGMO-Box as a gateway. An optional and secure network connection enables remote maintenance and Industrie 4.0 applications, amongst others.



### Sensor-actuator level

The SeGMO products collect production data and execute commands enabling process digitization and thus Industrie 4.0 applications.




# Plug & Play

## Speedy installation and simple cabling


The quality of a positioning drive often becomes apparent during initial commissioning. Here, easy integration and convenient interaction are the keys to error-free and efficient engineering.

At Lenord+Bauer, the SeGMO-Support tool is used to configure the complete drive system: in addition to the necessary device files, executable function blocks are available for all standard automation platforms. It is also possible to move the positioning drives without activating the higher level control system.

After integrating the function blocks into the PLC program, the positioning drives can be activated rapidly via the higher level control system.

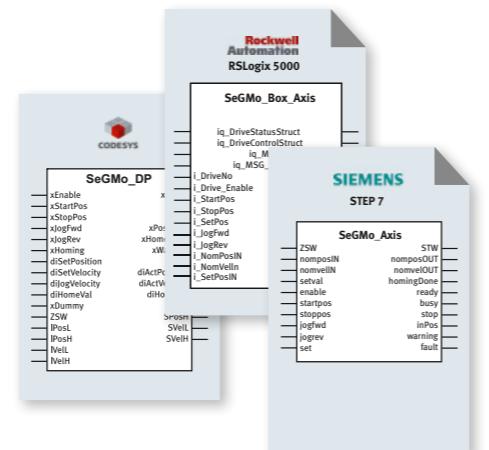

## SeGMO-Connect – Modern connection technology

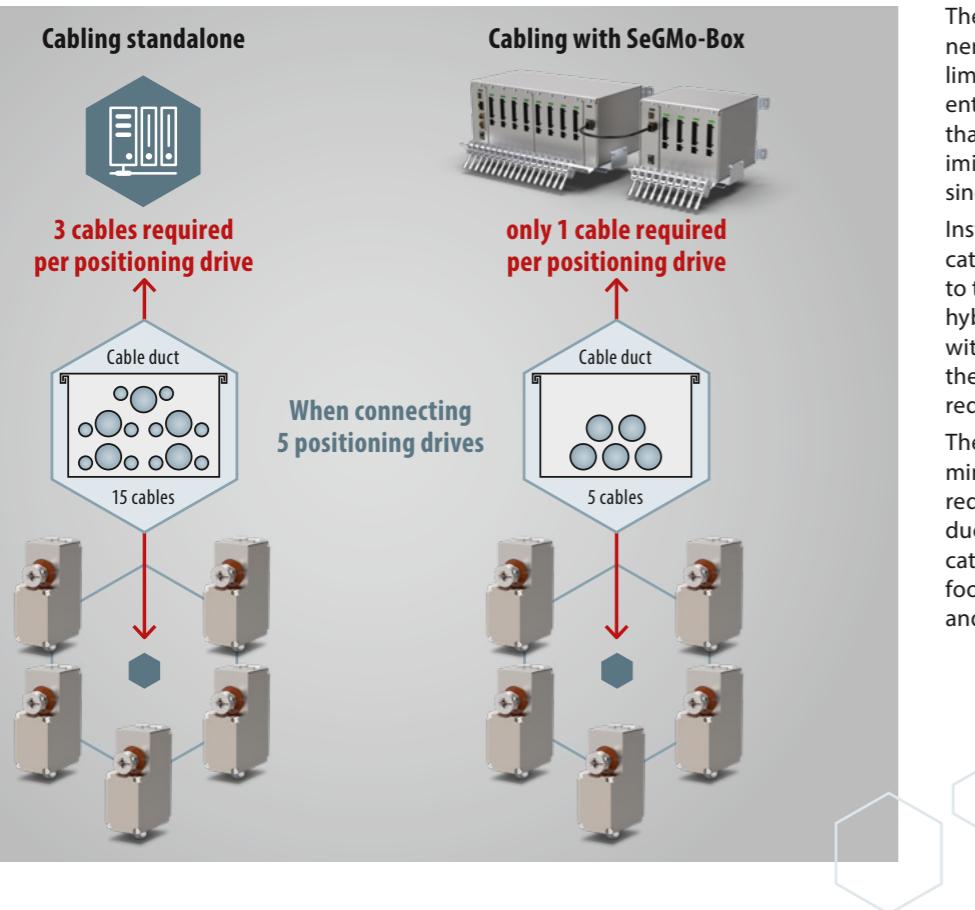

The high number of electrical components in the machines, such as sensors, limit switches, safety technology and the entire electrical drive technology mean that cabling costs are very high. To minimize these costs, Lenord+Bauer offers a single cable solution.


Instead of two cables for bus communication and a third cable for power supply to the positioning drives, only one hybrid cable is connected. For example, with five positioning drives connected to the SeGMO-Box, the number of cables is reduced from fifteen to five.

The ready-to-use hybrid cable not only minimizes the cabling effort, but also reduces the space required in cable ducts. It is designed for moving applications in drag chains and is available in food-grade and halogen-free variants and as a cULus Recognized Component.

## SeGMO-Assist easy assembly

### Montagebeispiel

- 1 Machine housing
- 2 Torque support
- 3 SeGMO-Assist
- 4 Setscrew
- 5 Through hollow shaft
- 6 Machine shaft with handwheel
- 7 M12 connection

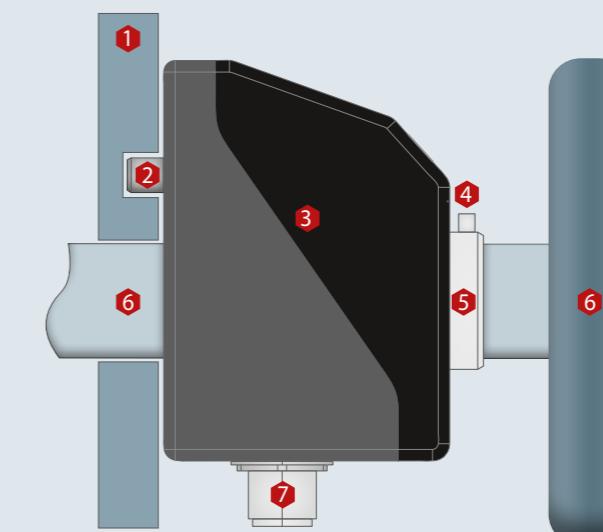

For rotatory position measurement, position displays are common. These are slid onto the machine shaft end of the feed axis, which serves as a fixed bearing in this instance. The position display is mounted directly onto the machine shaft using a force-fit connection. A torque support as moving bearing prevents the position display from rotating and also compensates even slight axial and radial movements of the machine shaft.

## SeGMO-Positioning easy assembly



Positioning drives for feed axes are often equipped with a hollow shaft which is slid directly onto the machine shaft and fastened using a clamping ring. It forms the fixed bearing. The positioning drive is prevented from rotating by means of a torque support.

This moving bearing compensates for axial or radial backlash of the machine shaft. The positioning drive "rides" on the machine shaft and makes a minimum oscillating motion. The torque support can easily be adapted to the respective installation space.


### Assembly example

- 1 Machine housing
- 2 Torque support
- 3 Clamping ring
- 4 Machine shaft
- 5 SeGMO-Positioning
- 6 Connection SeGMO-Connect

### USB service access

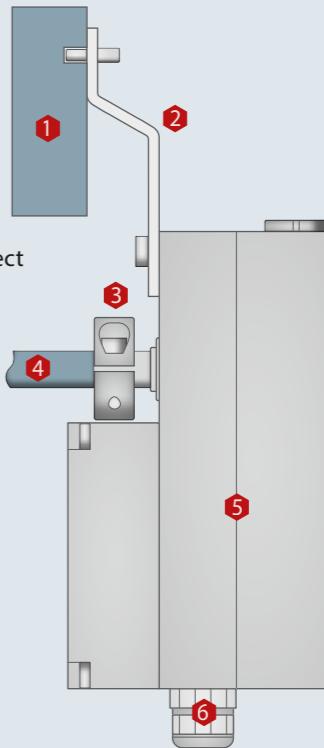

### Torque support as moving bearing

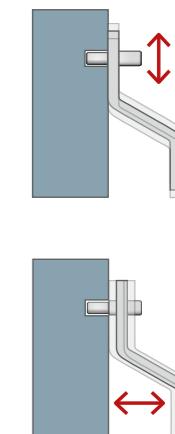

The form and design of the torque support depend on the application.  
Various accessories are available for mounting.

# The SeGMo-System in operation


## Error-free format change and process reliability

To ensure that different packaging sizes can be processed perfectly, some machine adjustments are required during setup. For example, the height and width settings may need to be changed. These changes can be done quickly and error-free using the SeGMo-System. You can choose between semi- and full automation of your system.

As an introduction to your process automation, the addition of the SeGMo-Assist digital position display to the previously purely manual format adjustments is a good way to reliably monitor the axes connected to the higher level control system.

Do you need fully automatic, reproducible format changes at the push of a button? If so, automate your machine using the SeGMo-Positioning system. This is a valid option especially for small batch sizes and high packaging variety.

The SeGMo-Assist digital position displays and the SeGMo-Positioning drives can both be connected to the modular SeGMo-Box, integrated combined into an Industrial Ethernet fieldbus network and managed centrally via the Box. Using SeGMo-Connect hybrid cables in conjunction with the SeGMo-Box saves you time when cabling the drives, as only one cable is required per drive.

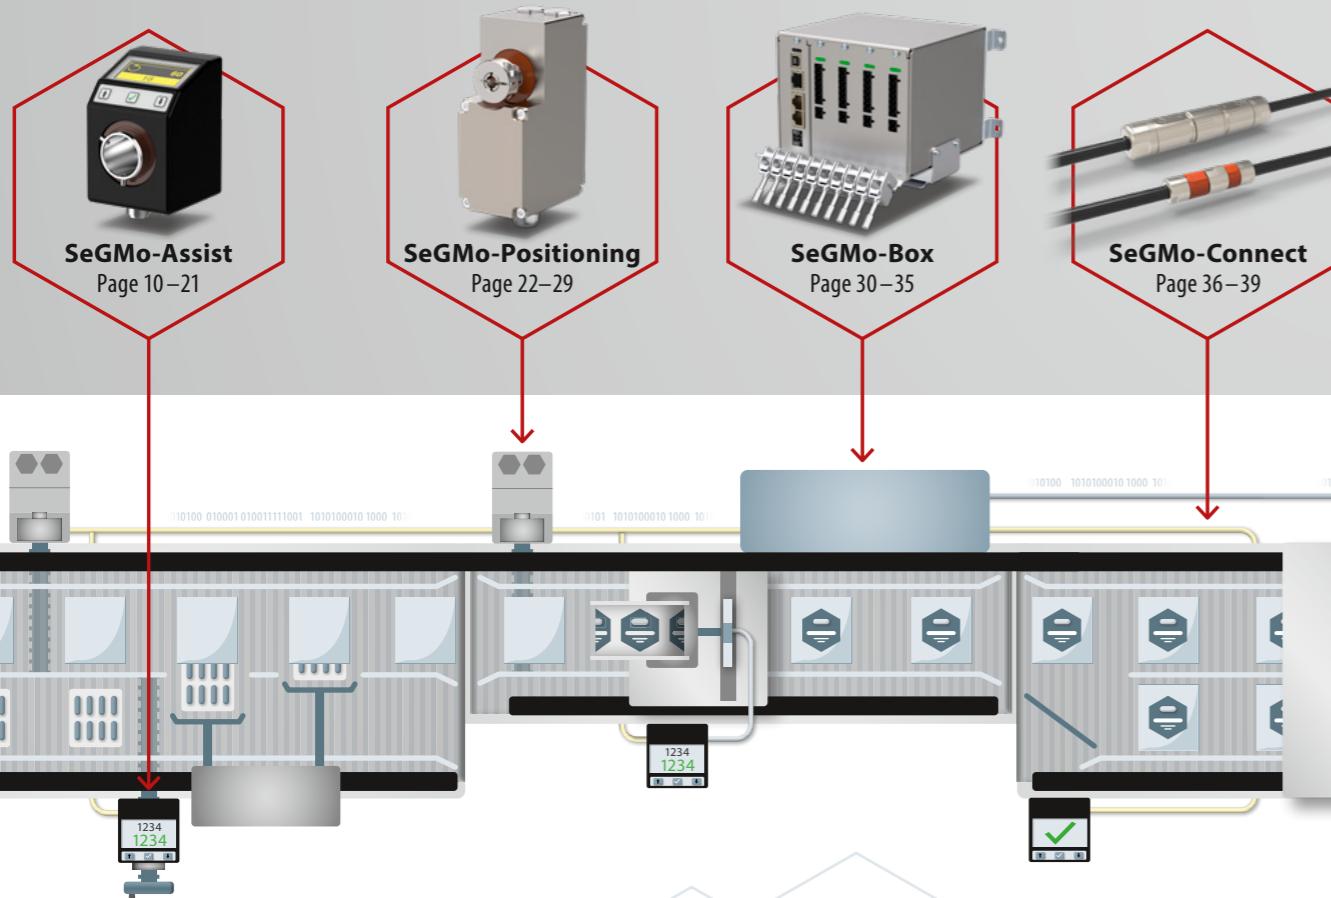

## Global solutions

Approval of machines and production facilities in the USA or Canada is similar to an obstacle course. Every component as well as the installed cables must meet UL requirements. Are you looking for a system to fully automate your machine that already meets these requirements? By relying on the UL-certified SeGMo-Positioning drives from Lenord+Bauer you can save yourself time-consuming individual testing.

Our company undergoes regular UL audits and attests that the safety requirements and all specifications in the manufacturing process are met. Not only the positioning drives, but also the associated cables and the SeGMo-Box meet UL requirements and bear the cURus or cULus approval mark. This demonstrates that the SeGMo components meet the applicable standards as per UL 61800. Compliance with NFPA 79 and American Wire Gauge (AWG) wiring is also guaranteed.



## i³AAC: Ready for Industrie 4.0

Digitization and intelligent data evaluation are the technological drivers of Industrie 4.0. Both are implemented as part of i³AAC to exploit future applications such as Condition Monitoring and system monitoring:

- Intelligent data preparation enables axis status monitoring thus preventing unplanned system downtime
- Fast integration thanks to available function blocks for the most common automation platforms, commissioning tools and decentral control units
- Easy interaction with system due to free configuration of the user interface, USB connection and web server



# SeGMo-Assist

## Manually guided format adjustment

### General

- Display of nominal and actual position to facilitate manual adjustment processes
- For rotatory and linear position measurements
- Display to assist with format or tool changes

### Features

- Plastic housing, ABS
- Operating temperature range 0 °C to +60 °C
- Bright graphic display for displaying client-specific pictograms
- Degree of protection IP 65
- CAN bus with CANopen protocol, IO-Link, profile CiA 406<sup>(1)</sup>

### Advantages


- Not sensitive to EMC interference
- Simple cabling
- Extremely compact for confined installation situations
- Ready for use directly after switching on the power due to absolute multiturn position detection
- Freely programmable pictograms for easy user navigation
- Maintenance-free electrical parts

### Fields of application

- Packaging machines
- Food and bottling lines
- Wood and plastic processing machines
- General mechanical and systems engineering



**Batteryless system – Good for both the environment and your budget**

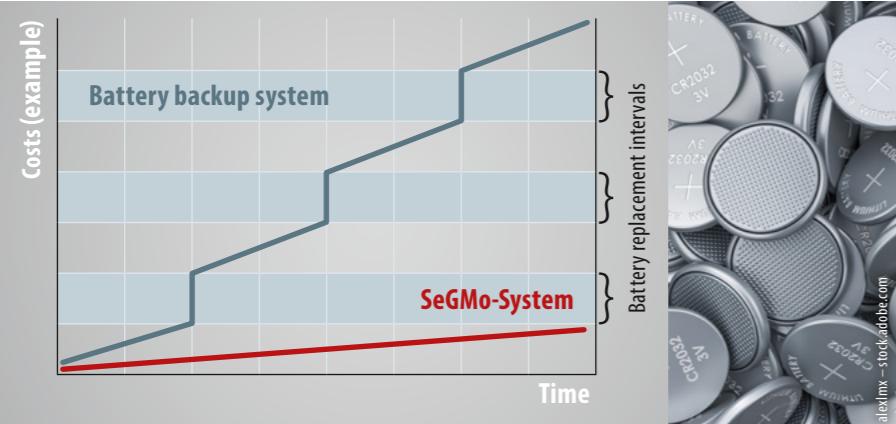

The electrical maintenance-free, digital position display with integrated absolute multiturn rotary encoder does not require a backup battery.

This saves you operating costs and at the same time protects the environment, as there is no need to change batteries.



<sup>(1)</sup> other communication interfaces via the modular SeGMo-Box

Add the digital SeGMo-Assist position display to your system to greatly simplify manual adjustment procedures.



# GEL SEPOD R

## Rotatory measuring system

### Description

The position display is designed for rotatory position measurement and is used for mounting on a machine shaft or spindle. It is connected to a higher level control system directly via the communication interface or indirectly via the modular SeGMO-Box. The use of the position display on the modular SeGMO-Box allows connection of all standard Industrial Ethernet communication interfaces.



### Connection


The position display is operated with a supply voltage of 20 to 30 V DC. The communication interface handles the bus communication and the power supply. Y- or T-distributors, interface cables and terminating resistors are required to connect a higher level control system or the modular SeGMO-Box.

### Integrated absolute rotary encoder

A magnetic absolute multturn encoder makes reference search routines superfluous after a power failure or "EMERGENCY STOP". After the power is switched on, the position display detects its position via the batteryless encoder and is ready for operation directly.

When switched off, the sensor shaft can be adjusted by 129 revolutions without losing the absolute position.

The absolute rotary encoder withstands high shock/vibration loads.

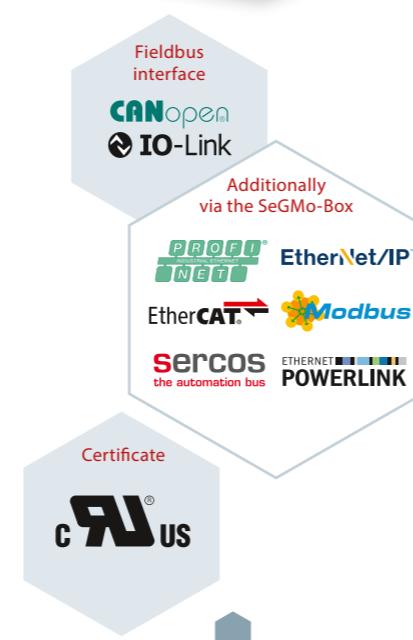



### Displays and controls

The position display is equipped with a graphic display. The following values can be read for position measurement:

- Actual position
- Nominal position
- Direction of rotation
- Operating status

Diagnostic displays support the user in troubleshooting. Menu navigation is via three membrane buttons below the display.

## Product information

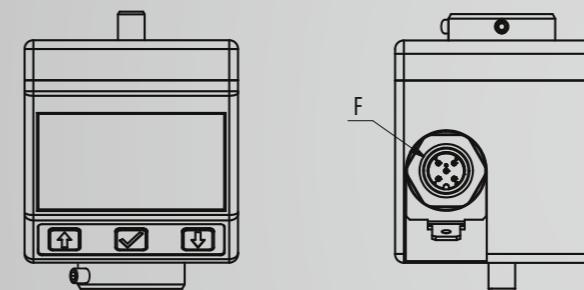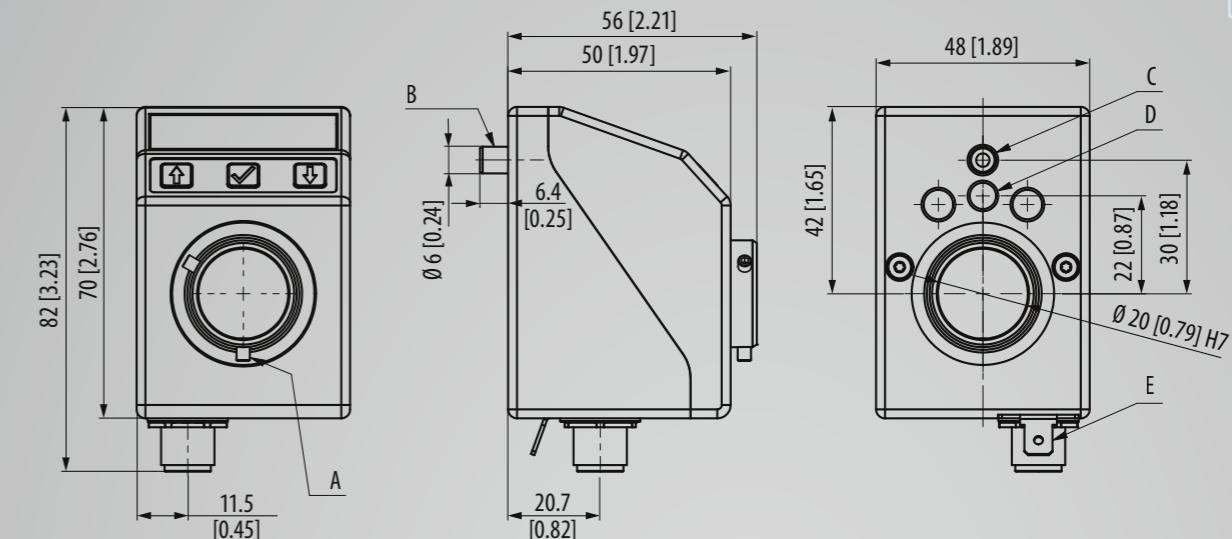

**A** Setscrew for fixing the machine shaft or spindle  
**B** Torque support  
**C** Position torque support GEL SEPODRxxxxB  
**D** Position torque support GEL SEPODRxxxxA  
**E** Functional ground (flat connector 6.3 mm)  
**F** Communication interface and supply voltage

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

### Technical data

Supply voltage	20 V to 30 V DC
Nominal current consumption	≈ 50 mA at 24 V DC
Communication interfaces: Fieldbus	CAN bus with CANopen protocol, profile CiA 406; no galvanic isolation, IO-Link
Communication interfaces: Industrial Ethernet <sup>(1)</sup>	sercos III <sup>(2)</sup> ; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP <sup>(2)</sup>
Material	Housing: Plastic ABS, anthracite, viewing window: Plastic, impact protection
Dimensions (not including connector)	≈ 48 x 50 x 70 mm / 1.89 x 1.97 x 2.76 inch
Weight	≈ 170 g / 6.0 oz
Display	OLED 1.54" monochrome, yellow (128 x 64 pixels, graphic), Language: English
Operating temperature range	0 °C to +60 °C / 32 °F to 140 °F
Degree of protection	IP 65

<sup>(1)</sup> in combination with GEL 65M, <sup>(2)</sup> upon request

# GEL SEPOD L

## Display for external sensors

### Description

The position display is intended for measurement with the external sensors GEL SELIN (linear) or GEL SEROT (rotatory) and is attached to the machine with two screws. It is connected to a higher level control system directly via the communication interface or indirectly via the modular SeGMO-Box. The use of the position display on the modular SeGMO-Box allows connection of all standard Industrial Ethernet communication interfaces.



### Connection

The position display is operated with a supply voltage of 20 to 30 V DC. The communication interface handles the bus communication and the power supply. Y- or T-distributors, interface cables and terminating resistors are required to connect the position display to a higher level control system or the modular SeGMO-Box. The external sensor is connected to the sensor port of the position display.

### Displays and controls

The position display is equipped with a graphic display. The following values can be read for position measurement:

- Actual position
- Nominal position
- Direction of rotation
- Operating status

Diagnostic displays support the user in troubleshooting. Menu navigation is via three membrane buttons below the display.




### Combinations: SeGMO-Assist/Communication interfaces

Interfaces	GEL SEPOD R	GEL SEPOD L	GEL SEHMI
CANopen	✓	✓	✓
IO-Link	✓	✓	✓
PROFINET IO/RT	1	1	1
EtherCAT	1	1	1
EtherNet/IP	1	1	1
sercos III	1	1	1
POWERLINK	1	1	1
Modbus/TCP	1	1	1

Free to choose the interface:  
the SeGMO range supports all standard fieldbus interfaces.

✓ Standalone  
1 in combination with GEL 65Mx

## Product information

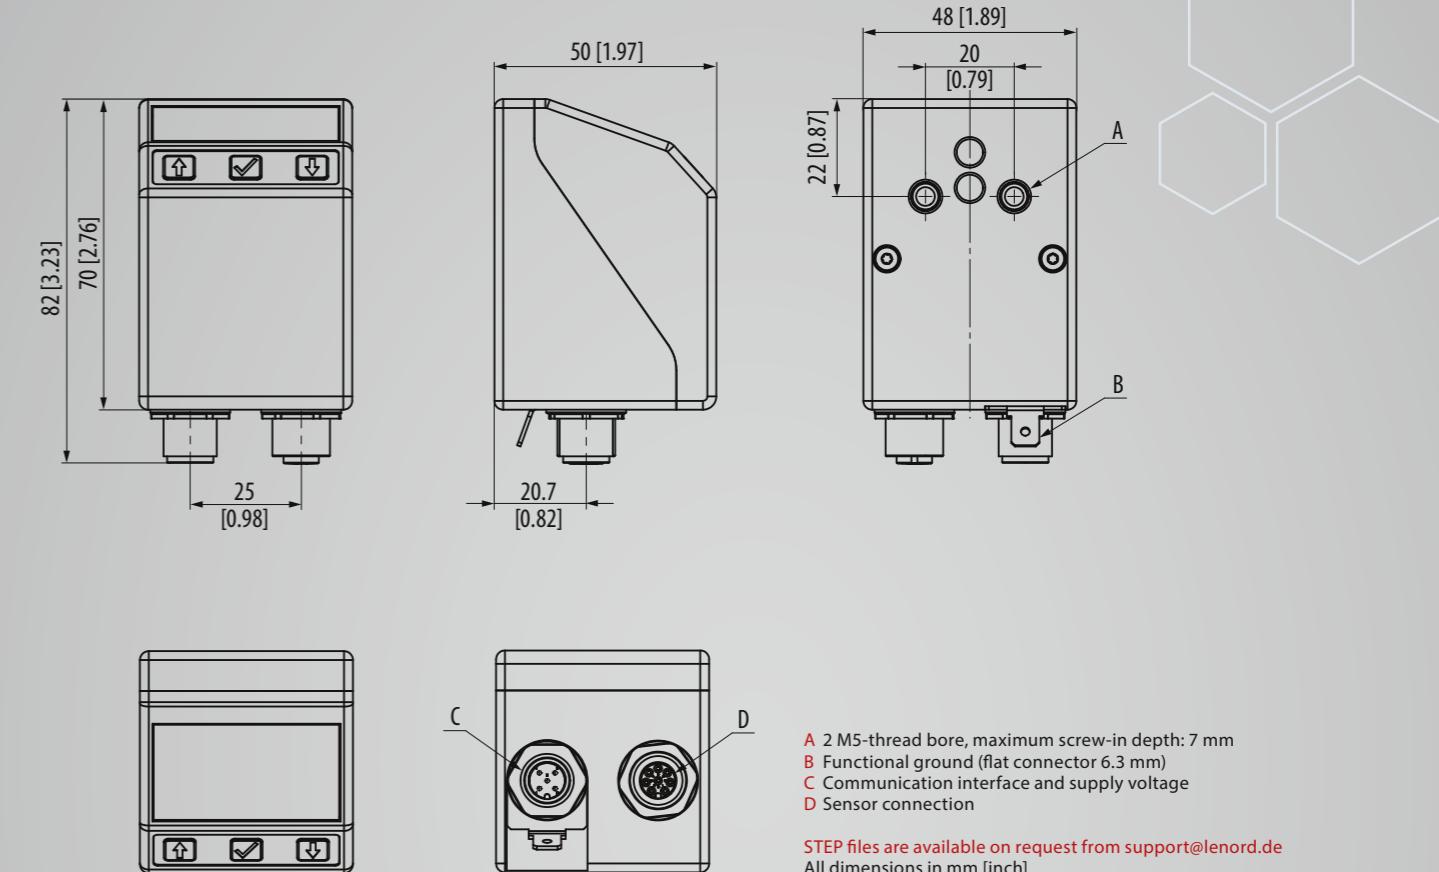

A 2 M5-thread bore, maximum screw-in depth: 7 mm  
B Functional ground (flat connector 6.3 mm)  
C Communication interface and supply voltage  
D Sensor connection

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

### Technical data

Supply voltage	20 V to 30 V DC
Nominal current consumption	≈ 150 mA (with external sensor) at 24 V DC
Communication interfaces: Fieldbus	CAN bus with CANopen protocol, profile CiA 406; no galvanic isolation, IO-Link
Communication interfaces: Industrial Ethernet <sup>(1)</sup>	sercos III <sup>(2)</sup> ; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP <sup>(2)</sup>
Material	Housing: Plastic ABS, anthracite, viewing window: Plastic, impact protection
Dimensions (not including connector)	≈ 48 x 50 x 70 mm / 1.89 x 1.97 x 2.76 inch
Weight	≈ 100 g / 3.53 oz
Display	OLED 1.54" monochrome, yellow (128 x 64 pixels, graphic), Language: English
Operating temperature range	0 °C to +60 °C/32 °F to 140 °F
Degree of protection	IP 65

(1) in combination with GEL 65M, (2) upon request

# GEL SEROT

## Rotatory, absolute measuring system for GEL SEPOD L

### Description

The GEL SEROT rotary sensor detects changes in the position of a machine shaft or spindle without contact and can be mounted at a distance from the associated display. This offers the advantage that the measured values can be read independently of the measuring point. The recorded values and the operating states of the sensor are transmitted to the GEL SEPOD L position display. It supplies power to the sensor, shows the sensor data on the display and communicates with the higher level control system.


The integrated magnetic-absolute multiturn encoder makes reference search routines superfluous after a power failure or emergency stop. After the power supply is switched on, the sensor detects its position via the batteryless multiturn encoder and is ready for operation directly. When switched off, the sensor shaft can be adjusted by 129 revolutions without losing the absolute position. The multiturn encoder withstands high shock/vibration loads.



### Connection

Intended for use with the GEL SEPOD L position display.

### Product information

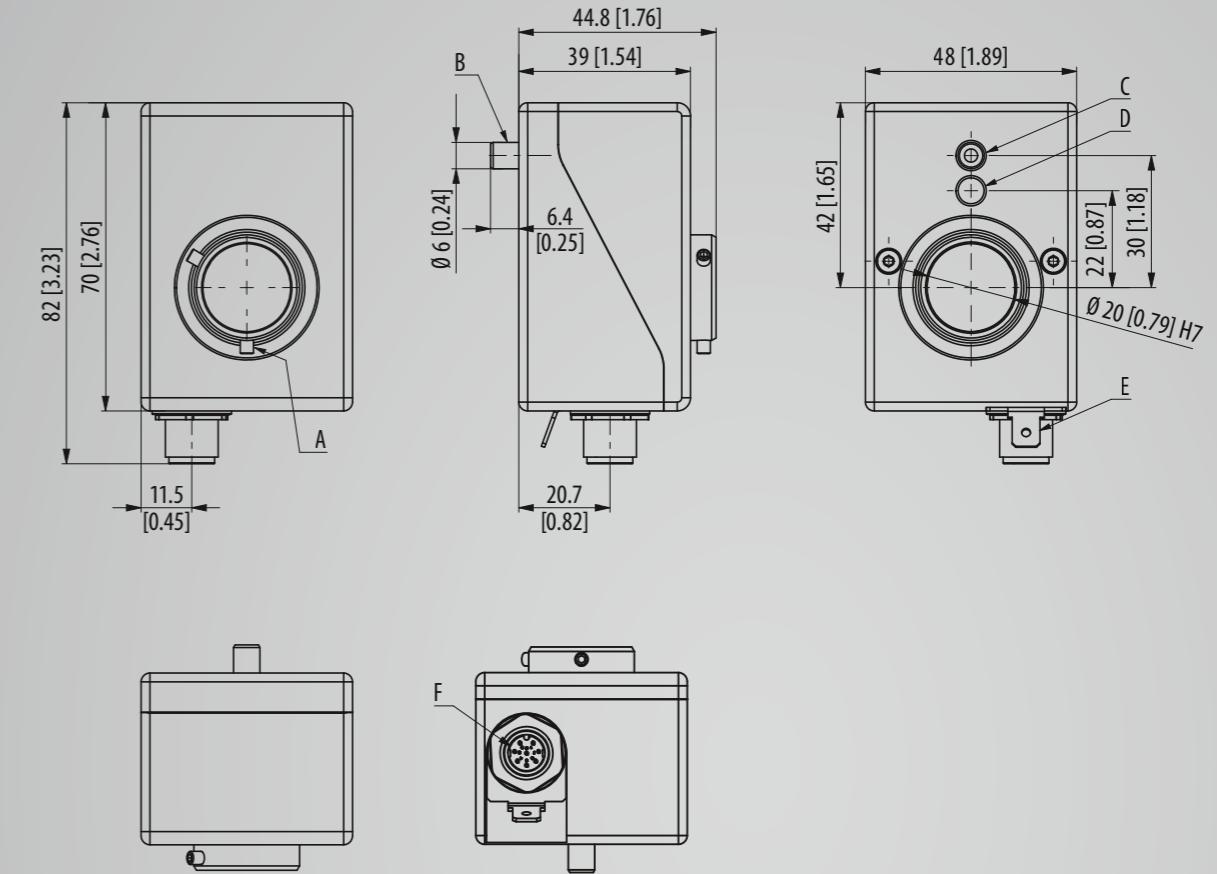

**A** Setscrew for fixing the machine shaft or spindle  
**B** Torque support  
**C** Position torque support GEL SEROTxxxxxB  
**D** Position torque support GEL SEPODxxxxxA  
**E** Functional ground (flat connector 6.3 mm)  
**F** Communication interface and supply voltage

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

### Technical data

Supply voltage	20 V to 30 V DC
Nominal current consumption	≈ 30 mA at 24 V DC
Material	Housing: Plastic PA 12, black
Dimensions (not including connector)	≈ 48 x 44.8 x 70 mm / 1.89 x 1.76 x 2.76 inch
Weight	≈ 145 g / 5.12 oz
Operating temperature range	0 °C to +60 °C/32 °F to 140 °F
Degree of protection	IP 65

# GEL SELIN

## Linear, absolute measuring system for GEL SEPOD L

### Description

The GEL SELIN linear sensor detects position changes of linear adjustment processes without contact. The position changes are transmitted from the GEL SEPOD L position display to a higher level control system. The communication interface is used for data transmission of the position values and power supply of the linear sensor. For contactless acquisition of the position values, a magnetic tape must be attached to the linear axis.




The linear sensor is mounted at a maximum distance of 1.5 mm from the magnetic tape and connected to the position display via the communication interface. At reduced measuring accuracy, a sensor distance of 2 mm to the magnetic tape is also possible. The linear sensor measures the distance between itself and the magnetic tape thus facilitating assembly of the measuring system. If the maximum distance is exceeded, the linear sensor transmits a status bit and also indicates this condition by means of an LED indicator.

### Connection

Intended for use with the GEL SEPOD L position display.



### Product information

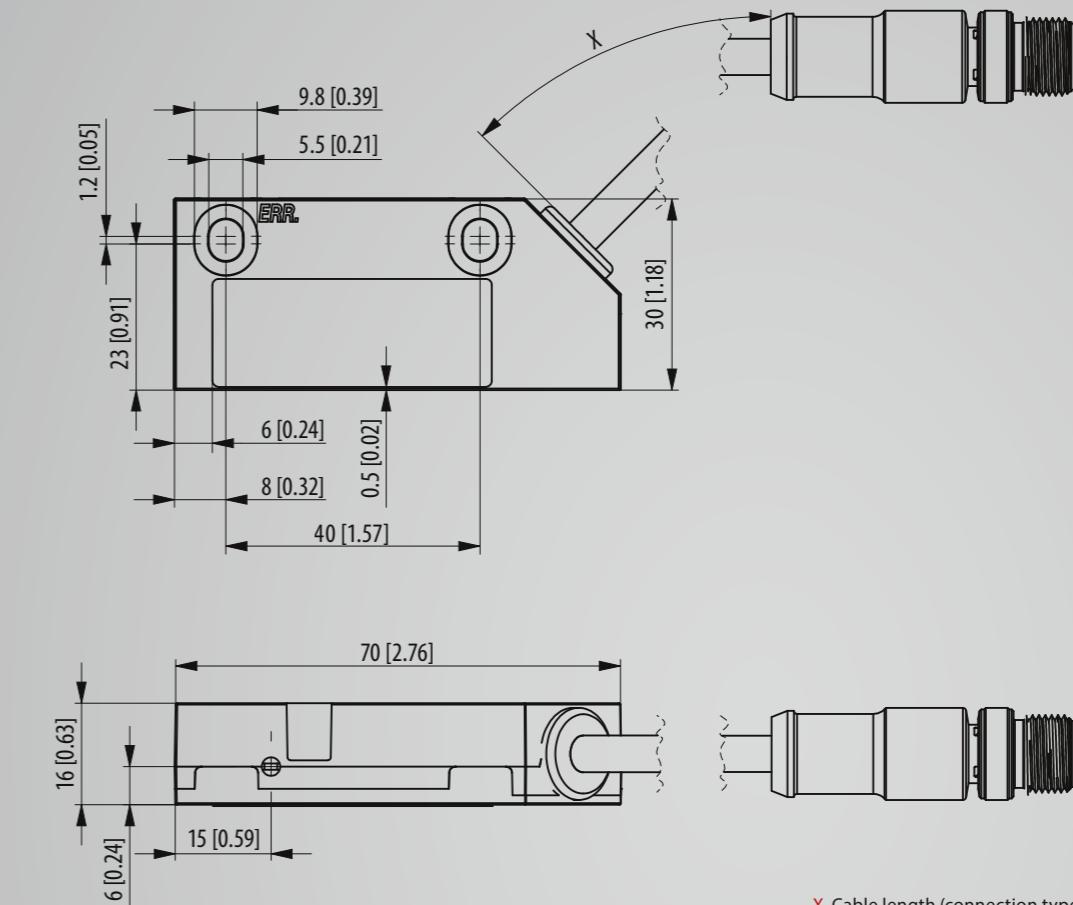

X Cable length (connection type)

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

### Technical data

Supply voltage	20 V to 30 V DC
Nominal current consumption	≈ 100 mA at 24 V DC
Material	Housing: Zinc die casting
Dimensions (not including connector)	≈ 70 x 16 x 30 mm / 2.76 x 0.63 x 1.18 inch
Weight	≈ 50 g / 1.76 oz
Measuring method	contactless, magnetic, absolute
Resolution	10 µm
Max. measuring range	10 m/32.81 foot
Max. positioning speed	4 m/s; 8.95 mph
Operating temperature range	-10 °C to +70 °C / 14 °F to 158 °F
Degree of protection	IP 65
Read distance <sup>(1)</sup>	1.5 mm/0.06 inch

(1) At reduced measuring accuracy, a sensor distance of 2 mm/0.08 inch to the magnetic tape is also possible.



# GEL SEHMI

## Nominal value display



### Description

The nominal value display shows nominal positions or operating states and supports the operator when changing formats or tools. It is mounted to the machine with two screws and connected to a higher level control system directly via the communication interface or indirectly via the modular SeGMo-Box. The use of the nominal value display on the modular SeGMo-Box allows connection of all standard Industrial Ethernet communication interfaces.



### Connection

The nominal value display is operated with a supply voltage of 20 to 30 V DC. The communication interface handles the bus communication and the power supply. Y- or T-distributors, interface cables and terminating resistors are required to connect to a higher level control system or the modular SeGMo-Box.



### Displays and controls

The nominal value display is equipped with a graphic display. The following values can be read:

- Nominal position
- Operating status

Menu navigation is via three membrane buttons below the display.





### Paperless step-by-step instructions via the full graphic display



Operation is clear in all languages due to the use of a full graphic display. The SeGMo-ImgConv tool can be used to design your own pictograms and thus simplify user navigation. The nominal value display can store up to 40 customized pictograms.

own pictograms and thus simplify user navigation. The nominal value display can store up to 40 customized pictograms.

## Product information

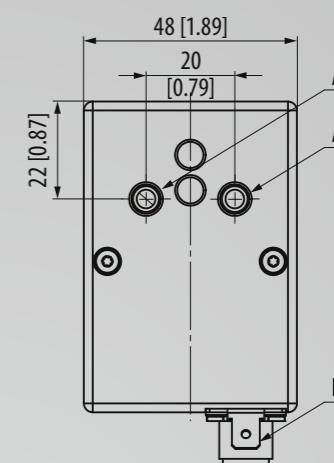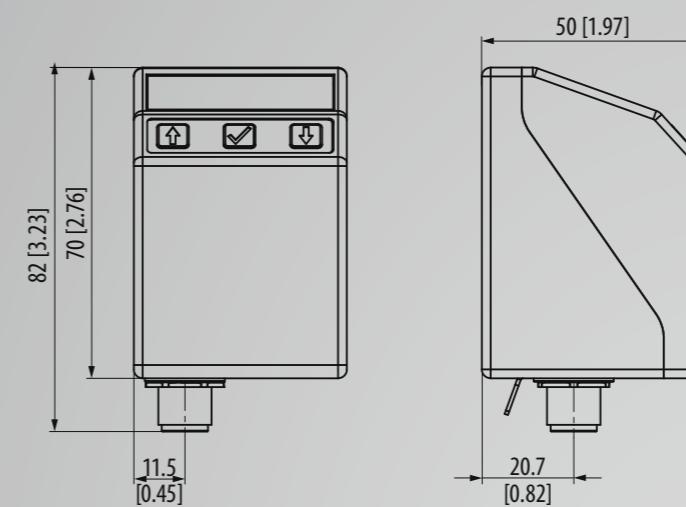


A 2 M5-thread bore, maximum screw-in depth: 7 mm  
 B Functional ground (flat connector 6.3 mm)  
 C Communication interface and supply voltage

STEP files are available on request from support@lenord.de  
 All dimensions in mm [inch]

### Technical data

Supply voltage	20 V to 30 V DC
Nominal current consumption	≈ 50 mA at 24 V DC
Communication interfaces: Fieldbus	CAN bus with CANopen protocol, profile CiA 406; no galvanic isolation, IO-Link
Communication interfaces: Industrial Ethernet <sup>(1)</sup>	sercos III <sup>(2)</sup> ; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP <sup>(2)</sup>
Material	Housing: Plastic ABS, anthracite, viewing window: Plastic, impact protection
Dimensions (not including connector)	≈ 48 x 50 x 70 mm / 1.89 x 1.97 x 2.76 inch
Weight	≈ 100 g / 3.53 oz
Display	OLED 1.54" monochrome, yellow (128 x 64 pixels, graphic), Language: English
Operating temperature range	0 °C to +60 °C/32 °F to 140 °F
Degree of protection	IP 65

(1) in combination with GEL 65M, (2) upon request



# SeGMo-Positioning

## Full automation

### General

- Compact drive unit for fully automated adjustment tasks
- BLDC motor and gear with multiturn absolute rotary encoder
- Integrated power amplifier
- Intelligent adjustment unit for assembly on a machine shaft

### Features

- Nominal torques from 1.4 Nm to 18 Nm
- Housing made of stainless steel, aluminum or plastic
- Operating temperature range -10 °C to +60 °C
- Batteryless absolute multiturn encoder
- Degree of protection IP 65/IP 67
- Communication interfaces CANopen (CiA 402); PROFIBUS-DP (V0/V1); sercos III; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP; IO-Link<sup>(1)</sup>
- Optional with cULus Component Recognition

### Advantages


- Either hybrid cable or connector outlet
- Monitoring of important system parameters supports safe operation (overload protection)
- Ready for use directly after switching on the power supply due to absolute position detection of the batteryless multturn magnetic-absolute multturn rotary encoder
- Maintenance-free electrical parts
- Maintenance-free gear due to sealed-for-life lubrication

### Fields of application

- Packaging machines
- Food and bottling lines
- Wood and plastic processing machines
- Printing and bookbinding machines
- Large production facilities




### Sensor, Gear and Motor mean SeGMo

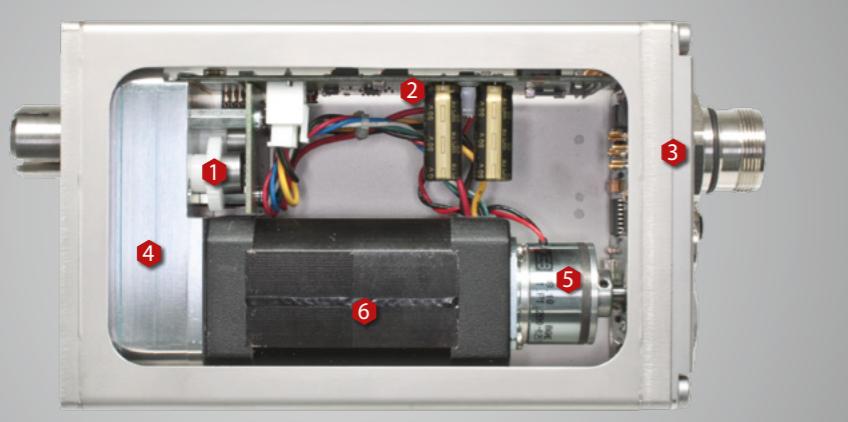

Sensor, gear and motor are integrated in a compact housing to save space.

- 1 Absolute position sensor
- 2 Power amplifier
- 3 Front end interface
- 4 Gear unit
- 5 Holding brake
- 6 Brushless DC motor

(1) soon available

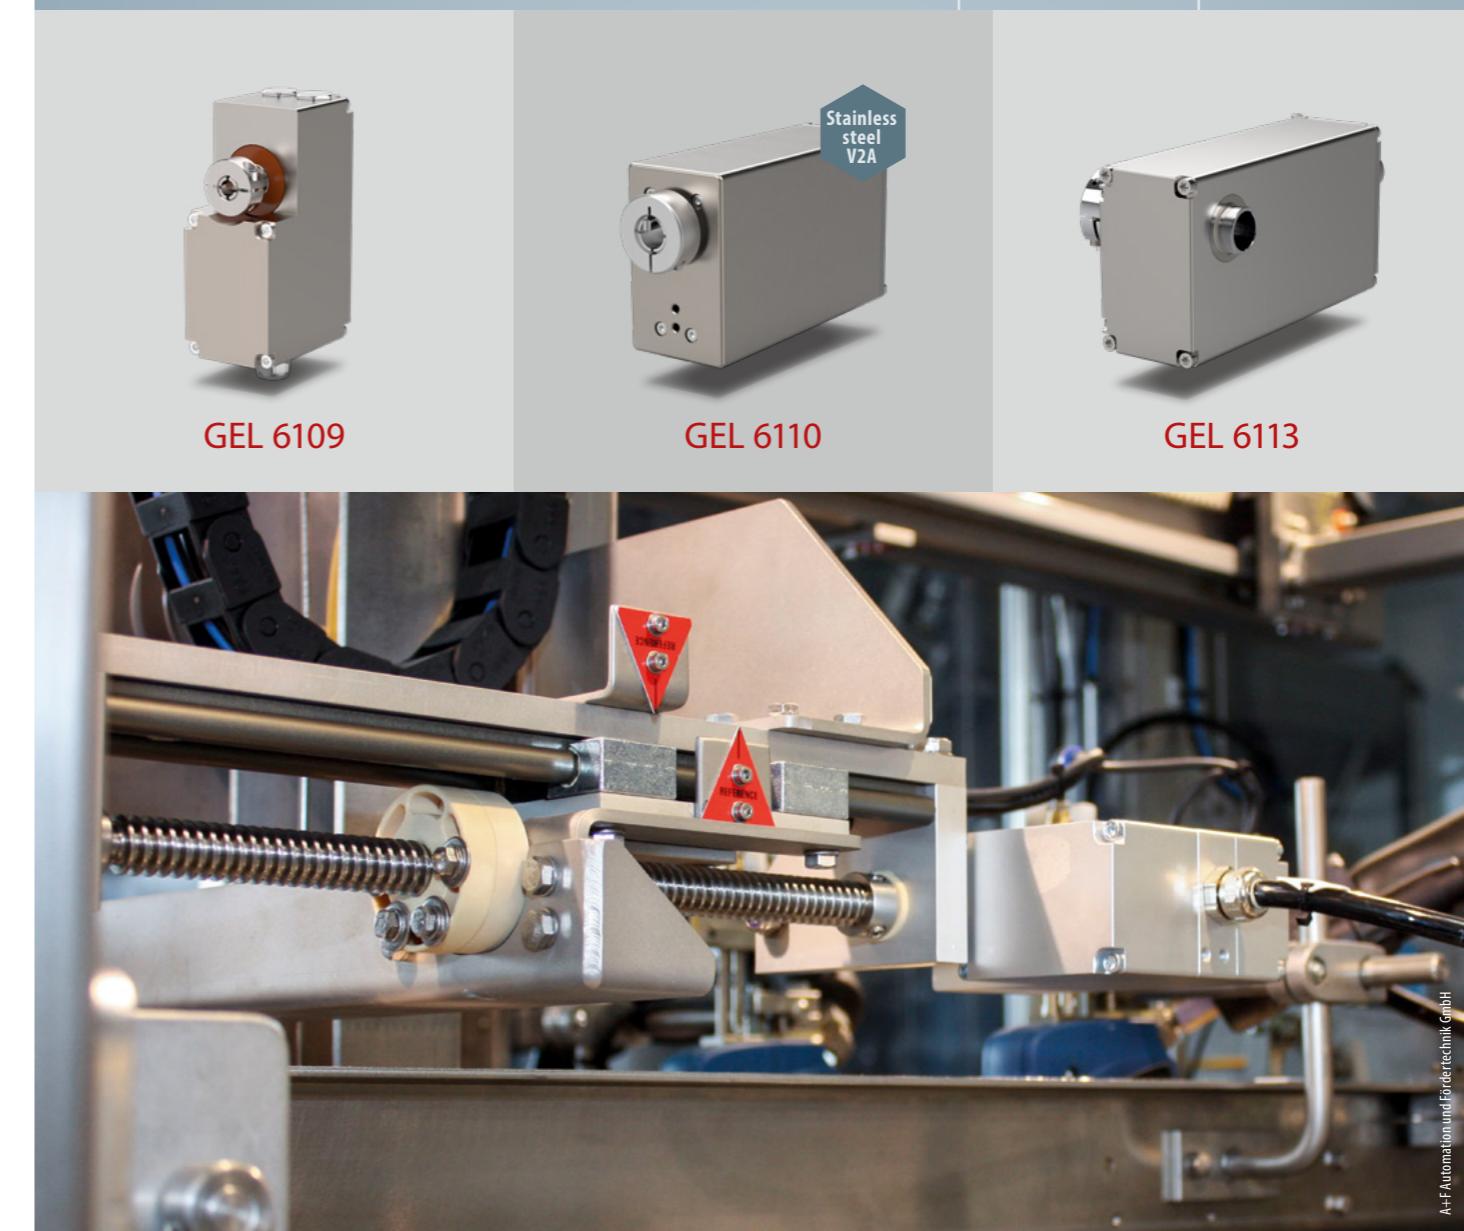

Perfectly integrated: The compact positioning drives automatically control height and width adjustment. Technical integration into the machine is particularly easy due to the wide range of interfaces.

# GEL 6109

## Compact positioning drive for confined installation situations

### Description

The GEL 6109 positioning drive is a very compact positioning system. The graduated housing allows it to fit into almost any gap. This small power pack delivers up to 5 Nm at 70 r.p.m.


The hollow plug-in shaft, which eliminates the need for an additional coupling to connect to the machine shaft, simplifies assembly and saves installation space.



### Connection

The positioning drive requires two supply voltages of 24 V to 30 V DC. The logic circuit supply voltage supplies the control electronics and the power circuit supply voltage supplies the power electronics for the motor. The positioning drive is connected to a SeGMo-Box using a hybrid cable (SeGMo-Connect). SeGMo-Connect handles bus communication and the power supply of the positioning drive.


As a standalone device with integrated fieldbus interface, it is connected directly to the higher level control system. For this purpose, two fieldbus cables and a power supply cable are connected to the drive.

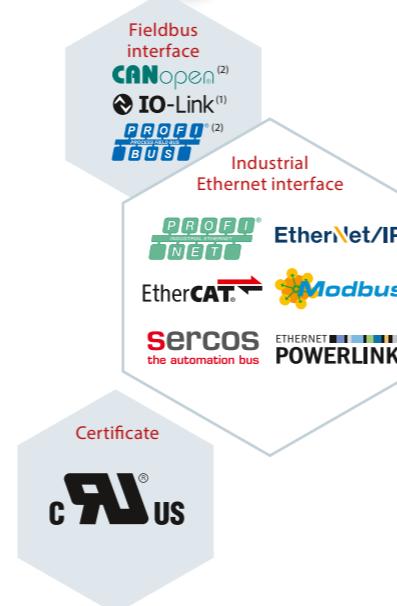

### Integrated absolute rotary encoder

A magnetic absolute multturn encoder makes reference search routines superfluous after a power failure or "EMERGENCY STOP". After the power is switched on, the positioning drive detects its position via the batteryless encoder and is ready for operation directly. The absolute rotary encoder withstands high shock/vibration loads.



### A real space saver – fits in the smallest corner

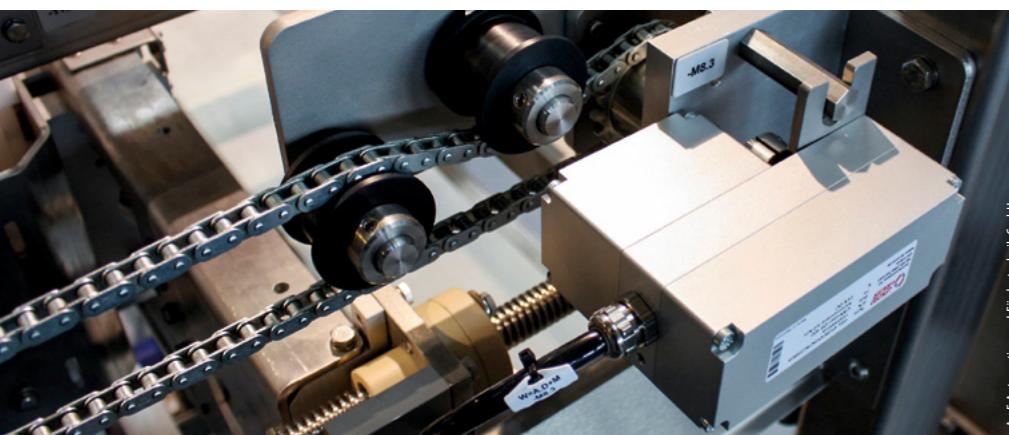


Thanks to its small dimensions, the GEL 6109 positioning drive offers more freedom in machine design.

## Product information

Connection technology HS

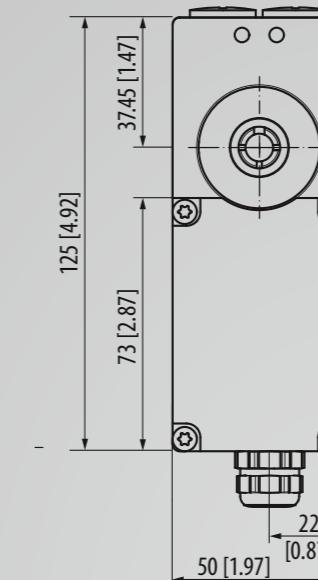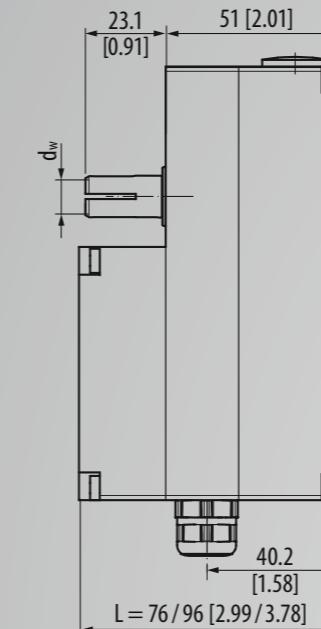

Connection technology ST

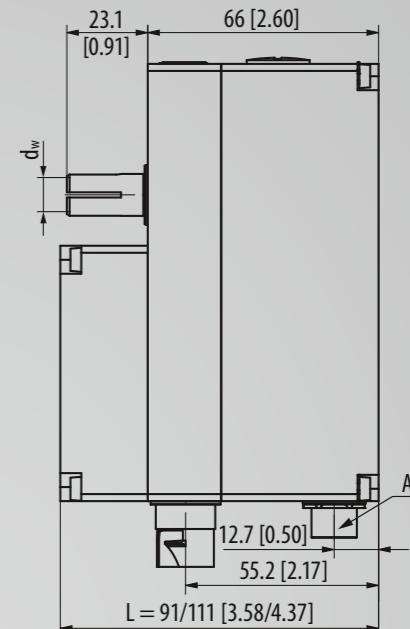

A M12: IE communication interfaces IN/OUT  
dw Diameter output shaft  
L Length depends on construction type (see Technical Information)

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

### Technical data

Supply voltage	24 V to 30 V DC
Nominal current consumption	2.6 A (max. 5 A) at 24 V DC
Duty cycle (DuCy) in % (load-dependent)	Duty cycle = 25 % at 100 % load torque Duty cycle ≤ 50 % at reduced load torque
Communication interfaces: Fieldbus	CANopen (CiA 402); PROFIBUS-DP (V0/V1) <sup>(2)</sup> ; IO-Link <sup>(1)</sup>
Communication interfaces: Industrial Ethernet (IE)	sercos III; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP
Nominal torque output shaft	2.5 Nm and 5 Nm at 70 r.p.m.
Output shaft	Semi-hollow shaft, solid shaft, customized shafts upon request
Housing material	Aluminum
Weight	≈ 1.25 kg / 44.09 oz
Operating temperature range	-10 °C to +60 °C/14 °F to 140 °F
Degree of protection	IP 67
cULus recognized Component, E196161	UL 61800-5-1 CSA C22.2 number 274-13
UL data: Degree of protection	Type 1
UL data: Ambient temperature	0 °C to +55 °C/32 °F to 131 °F
UL data: Operating temperature range	-10 °C to +55 °C/14 °F to 131 °F

# GEL 6110

## Compact positioning drive with high torque

### Description

The GEL 6110 series positioning drives are very compact and are available in either stainless steel or aluminum housings, both of which ensure degree of protection IP 67. The positioning drive is assembled using a hollow plug-in shaft without an additional coupling – thus saving adapter materials and minimizing mounting depth. This means that it can also be easily integrated into the respective machine concept in environments with hygiene requirements and where space is limited.




### Connection

The positioning drive requires two supply voltages of 24 V to 30 V DC. The logic circuit supply voltage supplies the control electronics and the power circuit supply voltage supplies the power electronics for the motor. The positioning drive is connected to a SeGMO-Box using a hybrid cable (SeGMO-Connect). SeGMO-Connect handles bus communication and the power supply of the positioning drive. As a standalone device with integrated fieldbus interface, it is connected directly to the higher level control system. For this purpose, two fieldbus cables and a power supply cable are connected to the drive.

The drive can be configured with an integrated holding brake as an option.


### Integrated absolute rotary encoder

A magnetic absolute multturn encoder makes reference search routines superfluous after a power failure or "EMERGENCY STOP". After the power is switched on, the positioning drive detects its position via the batteryless encoder and is ready for operation directly. The absolute rotary encoder withstands high shock/vibration loads.


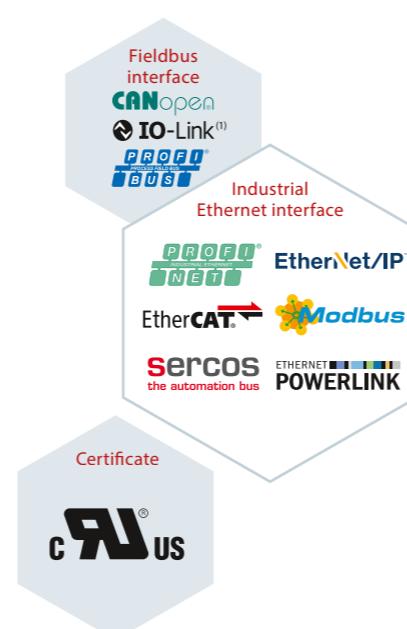


### Product information

Semi-hollow shaft

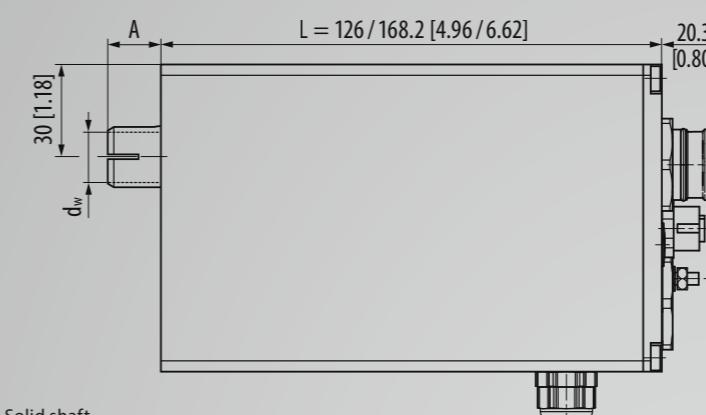

Solid shaft

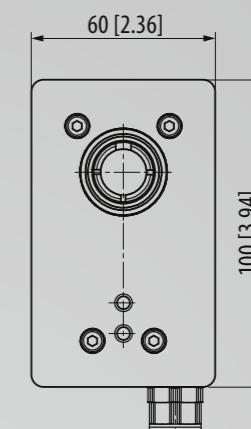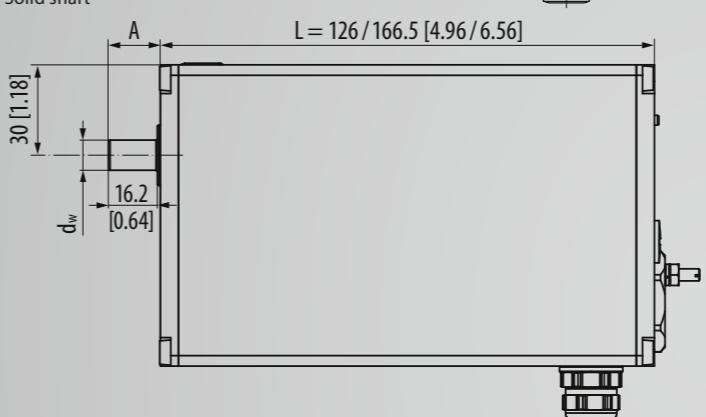

A/d<sub>w</sub> Dimension depends on output shaft (see Technical Information)

L Length depends on construction type (see Technical Information)

STEP files are available on request from support@lenord.de

All dimensions in mm [inch]

### Technical data

Supply voltage	24 V to 30 V DC
Nominal current consumption	3.6 A (max. 7.5 A) at 24 V DC
Duty cycle (DuCy) in % (load-dependent)	Duty cycle = 25 % at 100 % load torque Duty cycle ≤ 50 % at reduced load torque
Communication interfaces: Fieldbus	CANopen (CiA 402); PROFIBUS-DP (V0/V1); IO-Link <sup>(1)</sup>
Communication interfaces: Industrial Ethernet	sercos III; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP
Nominal torque output shaft	1.4 – 18 Nm at 230 – 25 r.p.m.
Output shaft	Semi-hollow shaft, solid shaft, customized shafts upon request
Housing material	Stainless steel, aluminum
Weight	≈ 1.60 kg – 3.50 kg / 56.44 oz – 123.46 oz
Operating temperature range	-10 °C to +60 °C/14 °F to 140 °F
Degree of protection	IP 67
cULus recognized Component, E196161	UL 61800-5-1 CSA C22.2 number 274-13
UL data: Degree of protection	Type 1
UL data: Ambient temperature	0 °C to +55 °C/32 °F to 131 °F

# GEL 6113

## Positioning drive with through hollow shaft

### Description

The GEL 6113 positioning drive with through hollow shaft allows direct replacement of handwheels for format adjustment. The positioning drive requires only a little more space on the machine shaft than a standard handwheel. With a mounting depth of 90 mm in axial direction, this is an extremely compact positioning drive. This dimension already takes into account the clamping ring for connection to the machine shaft.




### Connection

The positioning drive requires two supply voltages of 24 V to 30 V DC. The logic circuit supply voltage supplies the control electronics and the power circuit supply voltage supplies the power electronics for the motor.

The positioning drive is connected to a SeGMO-Box using a hybrid cable (SeGMO-Connect). SeGMO-Connect handles bus communication and the power supply of the positioning drive. As a standalone device with integrated fieldbus interface, it is connected directly to the higher level control system. For this purpose, two fieldbus cables and a power supply cable are connected to the drive. The rigid aluminum housing has a degree of protection IP 67. The drive can be configured with an integrated holding brake as an option.


### Integrated absolute rotary encoder

A magnetic absolute multturn encoder makes reference search routines superfluous after a power failure or "EMERGENCY STOP". After the power is switched on, the positioning drive detects its position via the batteryless encoder and is ready for operation directly. The absolute rotary encoder withstands high shock/vibration loads.

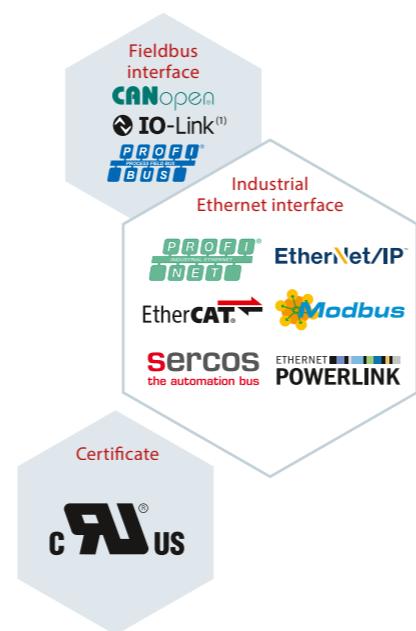

(1) soon available

### Product information

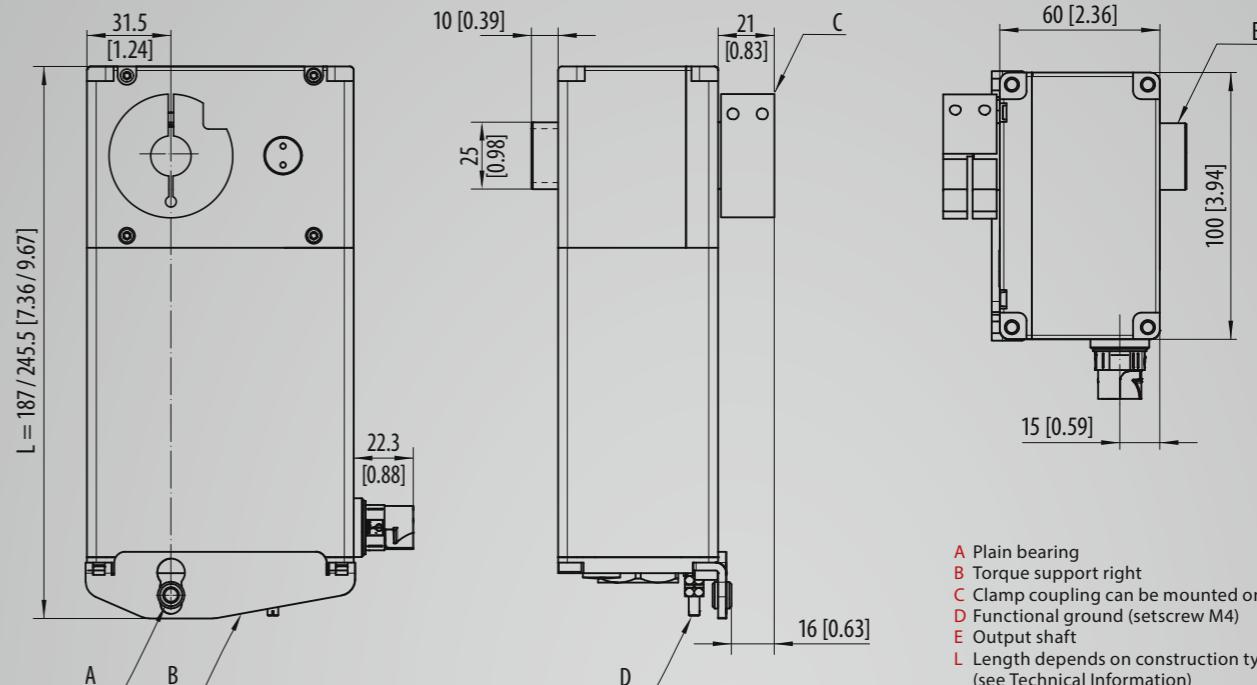

A Plain bearing  
 B Torque support right  
 C Clamp coupling can be mounted on both sides  
 D Functional ground (setscrew M4)  
 E Output shaft  
 L Length depends on construction type (see Technical Information)

STEP files are available on request from support@lenord.de  
 All dimensions in mm [inch]

### Technical data

Supply voltage	24 V to 30 V DC
Nominal current consumption	4.1 A (max. 10 A) at 24 V DC
Duty cycle (DuCy) in % (load-dependent)	Duty cycle = 25 % at 100 % load torque Duty cycle ≤ 50 % at reduced load torque
Communication interfaces: Fieldbus	CANopen (CiA 402); PROFIBUS-DP (V0/V1); IO-Link <sup>(1)</sup>
Communication interfaces: Industrial Ethernet	sercos III; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP
Nominal torque output shaft	5 Nm to 10 Nm at 55 r.p.m.
Output shaft	Through hollow shaft dw = 20 mm
Housing material	Aluminum
Weight	≈ 3.50 kg / 123.46 oz
Operating temperature range	-10 °C to +60 °C/14 °F to 140 °F
Degree of protection	IP 67
cULus recognized Component, E196161	UL 61800-5-1 CSA C22.2 number 274-13
UL data: Degree of protection	Type 1
UL data: Ambient temperature	0 °C to +55 °C / 32 °F to 131 °F
UL data: Operating temperature range	-10 °C to +55 °C / 14 °F to 131 °F

(1) soon available

# SeGMo-Box

## Central management of positioning drives and position indicators

### General

The decentral control units for assembling in the switch cabinet or in the system facilitate simple and consistent system integration and reduce the number of bus participants. They ensure communication with the higher level control system and control the positioning drives. SeGMo-Boxes are available in the following versions:

- Compact device for up to five positioning drives (GEL 6505). The Box serves as a star distributor and handles power distribution for the connected drives.
- Modular SeGMo-Box for up to 17 positioning drives/48 position displays (GEL 65M). Two different basic housings offer the possibility of populating four or nine slots freely.


### Features

- Temperature range 0 °C to +60 °C
- Degree of protection IP 20/IP 69K
- Integrated communication interfaces

### Advantages

- Easy commissioning of SeGMo-Positioning/SeGMo-Assist
- Easily configurable via SeGMo-Support Tool/SeGMo-Web
- Power management of connected drives
- Optional network connection for Industrie 4.0 application and remote maintenance (GEL 65M)

### Process monitoring and quality assurance

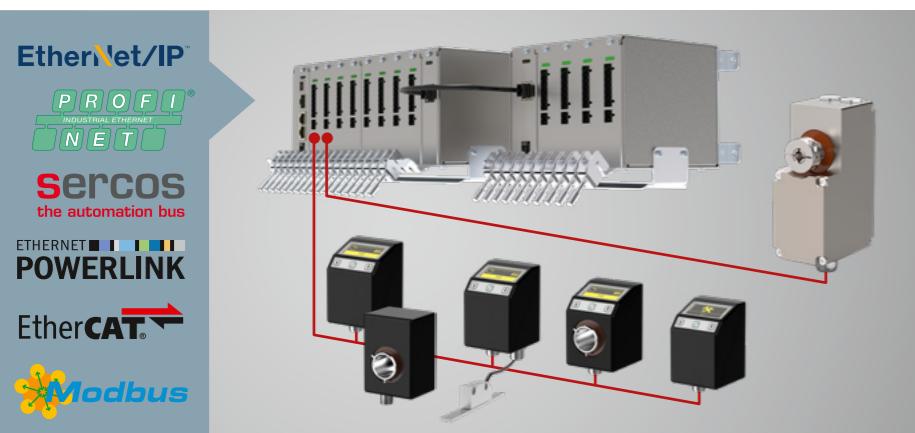

### Fields of application

- Packaging machines
- Food and bottling lines
- Wood and plastic processing machines
- Printing and bookbinding machines
- Large production facilities



Condition Monitoring also for your system thanks to separate and secure Industrie 4.0 interface

Using the bus interface, it is not only possible to set target position values, but the actual position values can also be returned to the control system. This means that all connected manual feed axes can be monitored and traced. The control system does not give the start command until a correct checkback signal is received, thus avoiding rejects and damage to the items to be packaged.



# GEL 6505

## Decentral control unit

### Description


In general, the SeGMo-System is configured via the higher level control system. Plug-in modules for all standard fieldbus and Industrial Ethernet communication interfaces are available for communication of the intelligent SeGMo-Box with the higher level control system. The plug-in modules can be supplied pre-assembled according to the type code.



### Function

Three LEDs per positioning drive indicate the status of power supply and communication. In the event of a malfunction or during an inspection, the power voltage and communication can be switched on or off using the buttons below the LEDs. Error acknowledgement and manual reset can also be performed using the pushbuttons. For service purposes, some parameters can be read out and set using the SeGMo-Support Tool via the USB port on the SeGMo-Box. The hybrid cables of the positioning drives are connected directly in the SeGMo-Box. Integrated electronic breakers ensure that the Box can be operated safely.

The maximum power consumption of the positioning drives can be programmed using the power management system. After completing the connection work, the SeGMo-Box checks the system parameters. After that, the positioning drives are automatically configured even without a connection to the higher level control system.

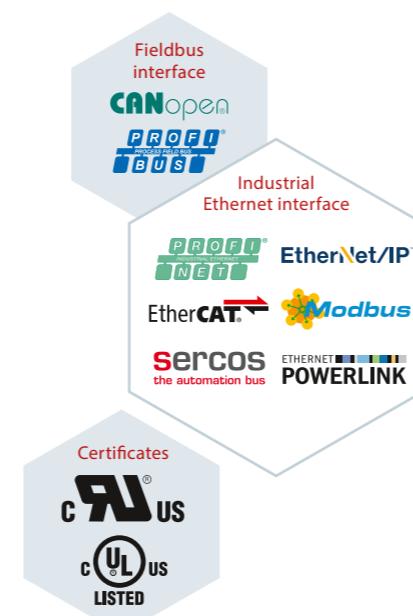


### Product construction


Power supply to the power circuits and logic circuits is either via a common connection or via two separate connections. In the case of separate power supply to the power circuits and logic circuits, the voltage for the positioning drive motors can be switched off without interrupting the internal communication, for example when "EMERGENCY STOP" is active. For requirements according to the Machinery Directive, the motor power of the positioning drives can be switched on the system side via certified safety relays. The condition monitoring of the drives remains guaranteed, as the internal communication between drive and box is not affected. This ensures that the drive can be switched off safely.

## Product information

GEL 6505 A

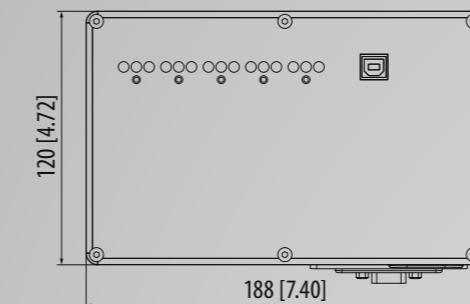

GEL 6505 B

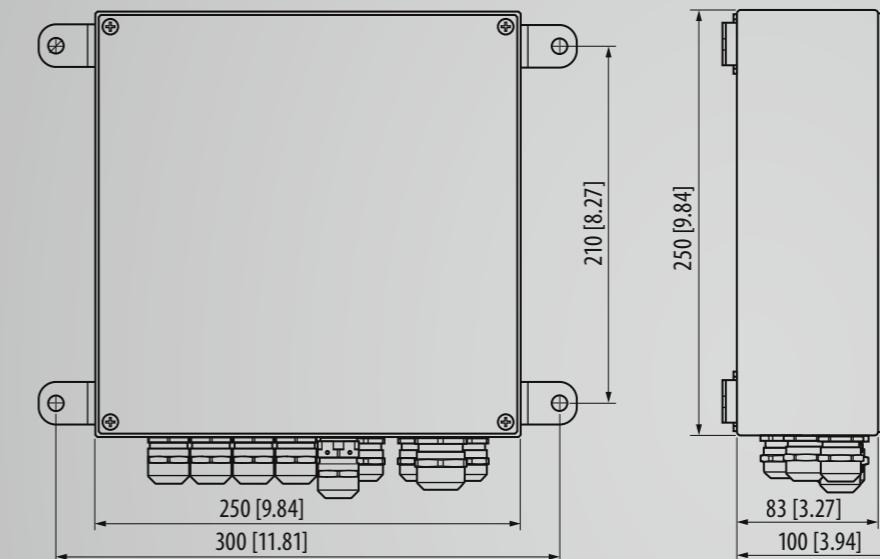

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

Technical data	GEL 6505 A	GEL 6505 B
Supply voltage (logic circuit)	20 V to 30 V DC, max. 1 A	
Supply voltage (power circuit)	24 V to 30 V DC	
Nominal current consumption (power circuit)	Depending on the number and load of the connected drives	
Communication interfaces: Fieldbus	CANopen; PROFIBUS-DP (V0/V1)	
Communication interfaces: Industrial Ethernet	sercos III; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP	
Assembly location	Top hat rail	Wet area
Housing material	Cast aluminum	Stainless steel 1.4301
Weight	≈ 1.00 kg / 35.27 oz	≈ 4.50 kg / 158.73 oz
Operating temperature range	0 °C to +60 °C / 32 °F to 140 °F	
Degree of protection	IP 20	IP 69K
UL data: File number	E483619	
UL data: Ambient temperature	0 °C to +55 °C / 32 °F to 131 °F	0 °C to +60 °C / 32 °F to 140 °F
UL data: Degree of protection	IP 20	IP 68
UL data: Degree of protection	—	Type 1

# GEL 65M

## Modular, decentral control unit

### Description

The modular SeGMO-Box GEL 65M is the decentral control unit of the SeGMO-System.


Industrial Ethernet interfaces are available to communicate with the central higher level control system (PLC). The modular design allows application-specific combinations. Two basic housing sizes are available. By combining two basic housings, up to 17 positioning drives or up to 48 position displays can be connected. A combination of positioning drives and position displays on a modular SeGMO-Box is possible. With an additional optional network connection, the modular SeGMO-Box is ideally suited for Industrie 4.0 applications and enables remote maintenance of the system without affecting the Industrial Ethernet fieldbus.



### Function

Four LEDs per plug-in module indicate the status of power supply and communication. The devices are automatically detected, parameterized and configured at the Box. Some parameters can be read out and set via the optional network interface or the USB port. A modern web interface is used for visualization. The cables of the connected devices are directly connected to the modular SeGMO-Box. Integrated electronic breakers ensure that the Box can be operated safely.

The maximum power consumption of the positioning drives can be programmed using the power management system. After completion of the connection work, the modular SeGMO-Box checks the system parameters. After that, the positioning drives are automatically configured even without a connection to the higher level control system.

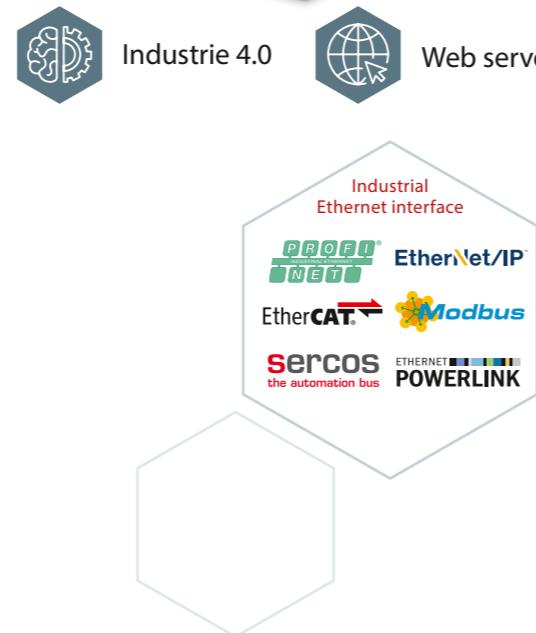


### Product construction

The power supply can be provided separately for each equipped plug-in module.



With a separate power supply to the power circuits and logic circuits, the voltage for each individual positioning drive can be switched off without interrupting the internal communication, for example when "EMERGENCY STOP" is active. For requirements according to the Machinery Directive, the motor power of the positioning drives can be switched on the system side via certified safety relays. The condition monitoring of the drives remains guaranteed, as the internal communication between drive and box is not affected. This ensures that the drive can be switched off safely.

### Product information

GEL 65M5

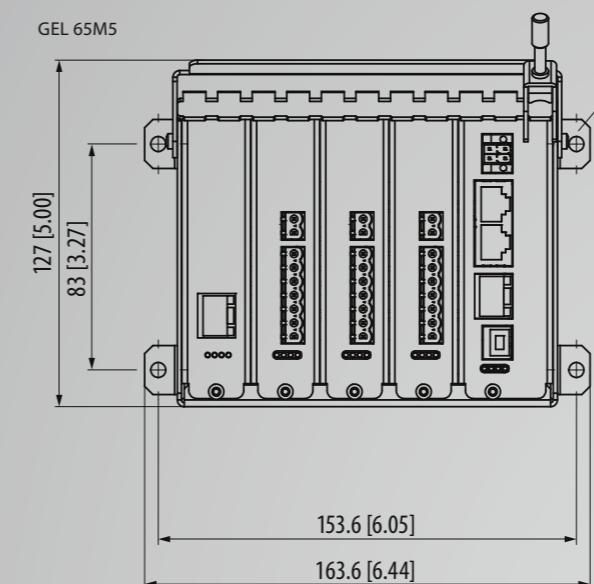

GEL 65M0

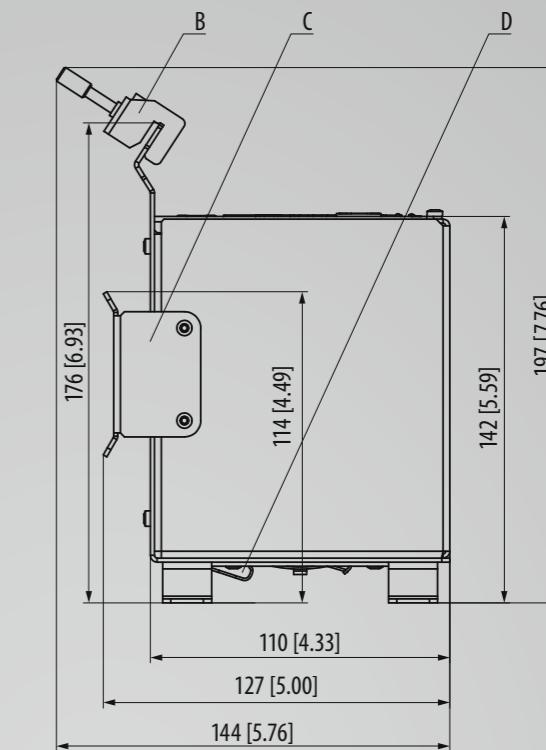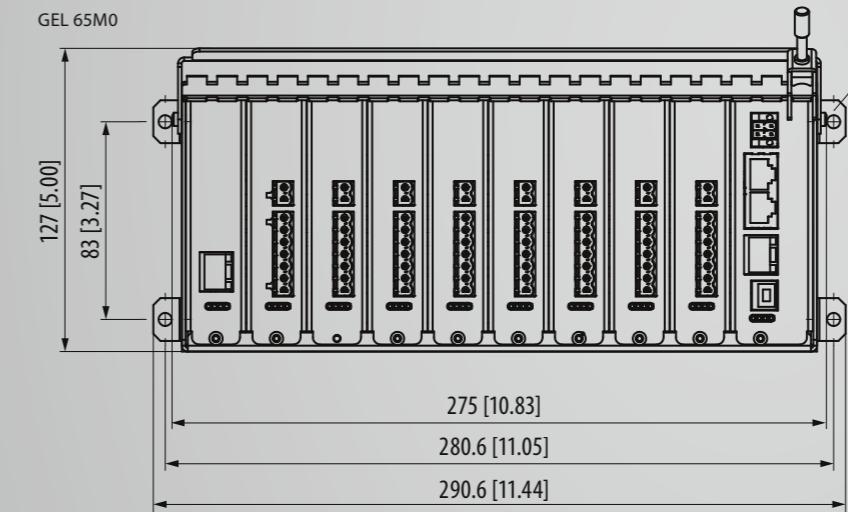

A Mounting method A (mounting bracket)  
 B Screen connection terminal  
 C Cable routing  
 D Mounting method B (top hat rail adapter)

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

Technical data	GEL 65M5	GEL 65M0
Supply voltage (logic circuit)	24 V to 30 V DC, max. 2.0 A	24 V to 30 V DC, max. 3.25 A
Supply voltage (power circuit)	24 V to 30 V DC	
Nominal current consumption (power circuit)	Depending on the number and load of the connected drives	
Communication interfaces: Industrial Ethernet	sercos III <sup>(1)</sup> ; POWERLINK; PROFINET IO/RT; EtherCAT; EtherNet/IP; Modbus/TCP <sup>(1)</sup>	
Housing material	Aluzinc sheet	
Weight	≈ 1.60 kg / 56.44 oz	≈ 2.70 kg / 95.24 oz
Operating temperature range	0 °C to +60 °C / 32 °F to 140 °F	
Degree of protection	IP 20	

(1) upon request

# SeGMo-Connect

## Connection cable for the SeGMo-System

### General


- Configurable hybrid cable for easy connection of SeGMo-Positioning drives
- M17 or M23 connector with integrated bus element for power supply and bus communication
- Quick disconnect connectors allow easy disconnection
- For power supply of the SeGMo-Positioning drives for stand-alone use

### Properties

- High electromagnetic compatibility (EMC housing shielding)
- Current carrying capacity as per DIN EN 60512
- Length from 3 m to 20 m


### Advantages

- Reduced cabling effort
- Can be adapted to the respective connection situation
- Time saving when connecting the SeGMo-Positioning drives with the SeGMo-Box or the modular SeGMo-Box.

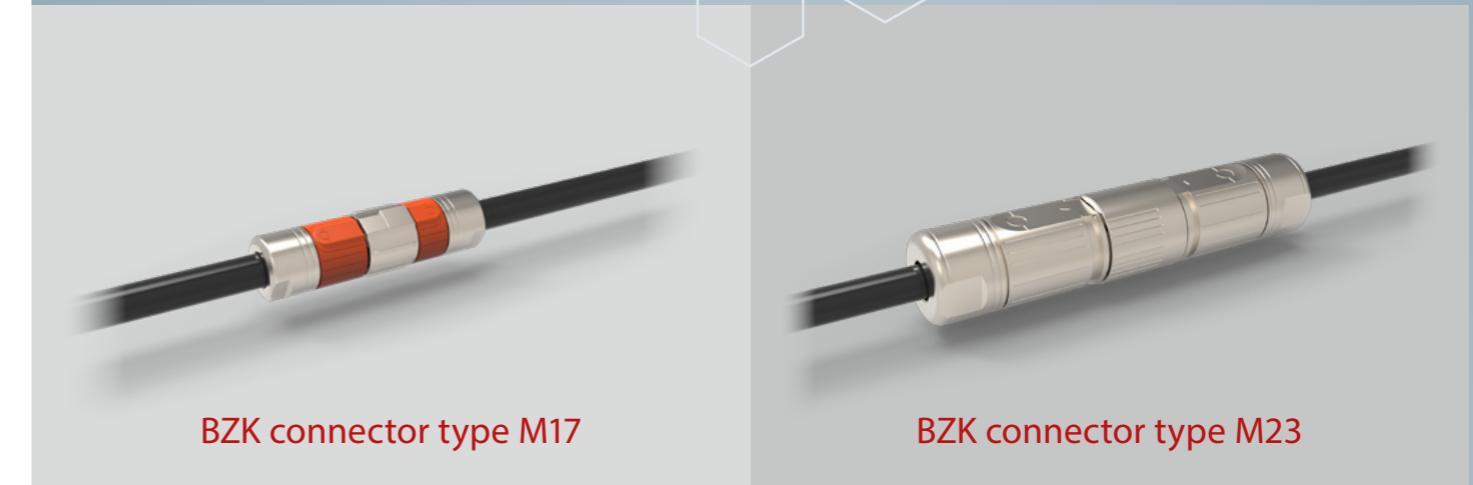

BZK connector type M17

BZK connector type M23

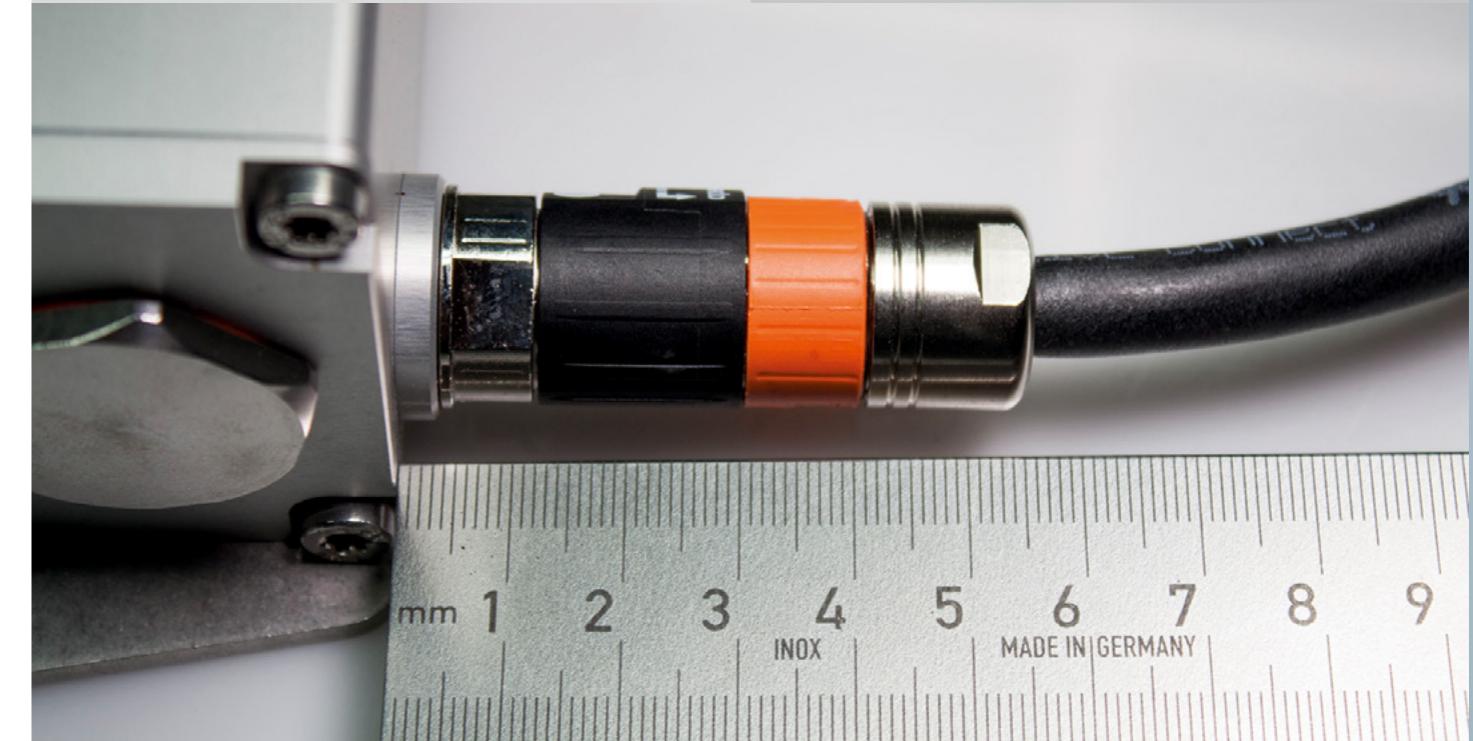


The connector protrudes only 55 mm into the installation space

### SeGMo-Connect combinations

#### Positioning drives

#### Hybrid cable

#### Decentral control unit

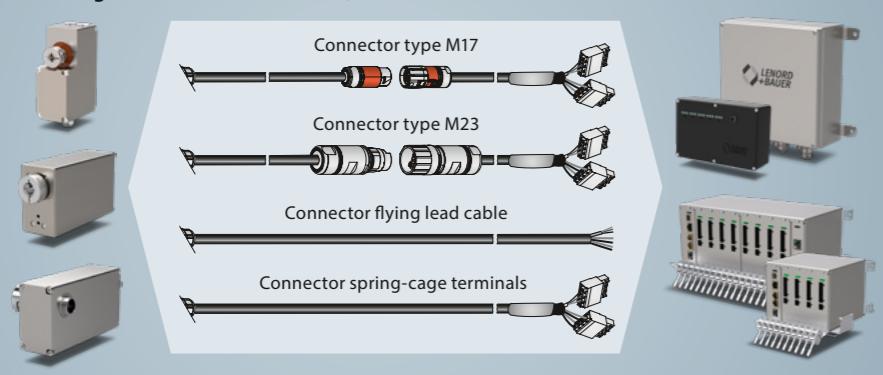

Convenient connection made to measure: With SeGMo-Connect, cabling the positioning drives and the SeGMo-Box is child's play.



## BZK 17 and 23

## Robust connectors for every application

## Description


Robust connectors are required to ensure safe transmission of data and power.

The connectors of the SeGMO-Connect series are additionally UL-certified and thus complete the product portfolio of the SeGMO-System.




## Product information


#### Connector type

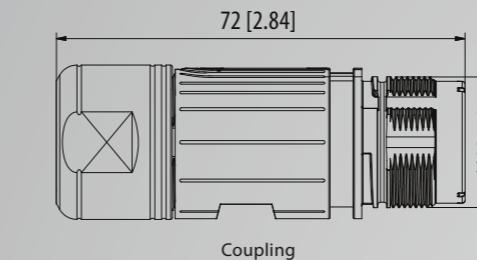


## Coup

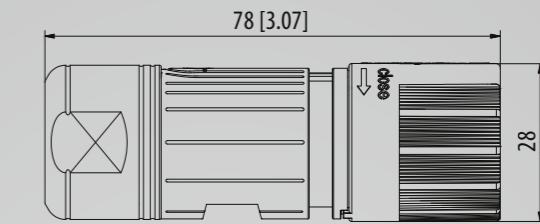

## Connectors

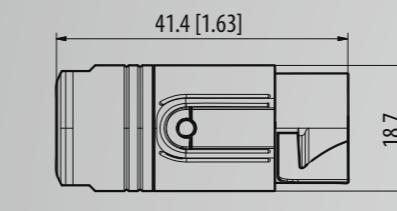

Coup

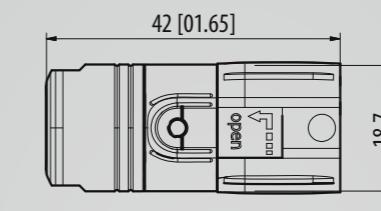

Connec

STEP files are available on request from support@lenord.de  
All dimensions in mm [inch]

Technical data	Connector type 23	Connector type 17
Contact type (coupling/connector)	Male/female	
Housing material (coupling/connector)	Brass nickel-plated (others upon request)	Brass, zinc die casting and plastic coated
Union nut material	Brass nickel-plated	—
Degree of protection	IP 66/IP 67	
Certification	cULus recognized component (no. E247738)	

# Expertise at your side

Our know-how gives you a technological advantage

We are an international specialist in the field of motion sensors and integrated drive technology. We develop, produce and distribute leading technology solutions for the mobility and machinery sectors. Our products ensure that high-speed trains run safely, packaging machines are set up with minimum effort, tool spindles are precisely monitored and car electric drives are controlled in an energy-efficient manner. For almost 60 years, our customers have been benefiting from extensive technical consultancy competence and our knowledge of applications.

We are the competent partner for you when it comes to efficiently integrating sensors and actuators, intelligently transforming signals into value-added functions and making them accessible interactively. With us, data streams become usable information at the point of origin. Integration into your system environment thus becomes possible intuitively.

Rely on our experience, which guarantees you low lifecycle costs, high availability and digital future reliability.

Lenord+Bauer – Finding solutions. Founding trust.



## High quality standards

To ensure excellent product quality and high failsafe performance, we naturally have a consistent process landscape and are certified as per DIN EN ISO 9001, DIN EN ISO 14001 and DIN EN ISO 22163 (IRIS). This process landscape is monitored and confirmed annually by an external body. In addition, you can of course audit us as a supplier.




## Active in future markets worldwide

**1965**  
Lenord, Bauer & Co. GmbH is set up in a basement in Oberhausen




**1973**  
The company headquarters is built in Oberhausen

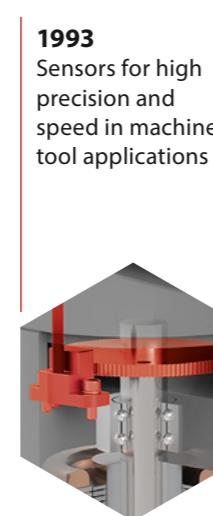

**1993**  
Sensors for high precision and speed in machine tool applications



**1996**  
Robust and wear-free sensor solutions for rail traffic

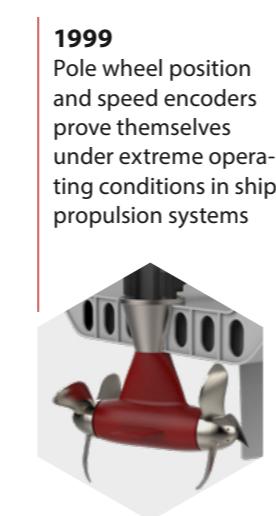

**1999**  
Pole wheel position and speed encoders prove themselves under extreme operating conditions in ship propulsion systems



**2008**  
Drive technology for packaging machines: The first generation of positioning drives is launched on the market



**2011**  
Internationalization: New subsidiary is established in Shanghai



**2012**  
New production plant in Gladbeck is inaugurated



**2019**  
Sensor for electromobility: Efficient drive control for synchronous and asynchronous motors



**2021**  
Lenord+Bauer Italy and USA are launched



# The optimum solution for you

## Personal consultation for your automation project

Do you wish to increase the degree of automation of your existing systems to boost productivity? You can achieve this by exchanging components, adding state-of-the-art technology, and replacing manual units. Our sales department will be happy to advise you on your retrofitting projects. We optimize efficiency, availability and operational reliability for you.

We are also the right partner for new systems. Contact us to learn more about using the SeGMO-System in your application.

### Technical consultation

+49 208 9963 215 // [support@lenord.de](mailto:support@lenord.de)

### Order processing

+49 208 9963 216 // [kundencenter@lenord.de](mailto:kundencenter@lenord.de)



kontaktwerkstatt - stock.adobe.com

We are available to offer you advice and support at every stage of your project.



### Information available without delay

Whether you are looking for product brochures, technical information, manufacturer's declarations or certificates, you are sure to find them in our download area. If you are planning a new installation or modernization, we will also be happy to provide you with our STEP files on request.

[www.lenord.de/en/service/download-area](http://www.lenord.de/en/service/download-area)





# Available globally

For you locally

#### **Lenord, Bauer & Co. GmbH**

Dohlenstrasse 32  
46145 Oberhausen  
**Germany**  
Phone +49 (0)208 9963 0  
[www.lenord.de](http://www.lenord.de)

#### **Lenord+Bauer Italia S.r.l.**

Via Gustavo Fara, 26  
20124 Milano  
**Italy**  
Phone +39 340 1047184  
[www.lenord.com](http://www.lenord.com)

#### **Lenord+Bauer USA Inc.**

32000 Northwestern Highway  
Suite 150  
Farmington Hills, MI 48334  
**USA**  
Phone +1 248 446 7003  
[www.lenord.com](http://www.lenord.com)

#### **Lenord+Bauer**

**Automation Technology (Shanghai) Co., Ltd.**  
Block 42, Room 302, No.1000, Jinhai Road  
201206 Shanghai  
**China**  
Phone +86 21 50398270  
[www.lenord.cn](http://www.lenord.cn)

Motion sensors and integrated drive technology



*Finding solutions.  
Founding trust.*