


MC-MNR 5G

5G Router



preliminary

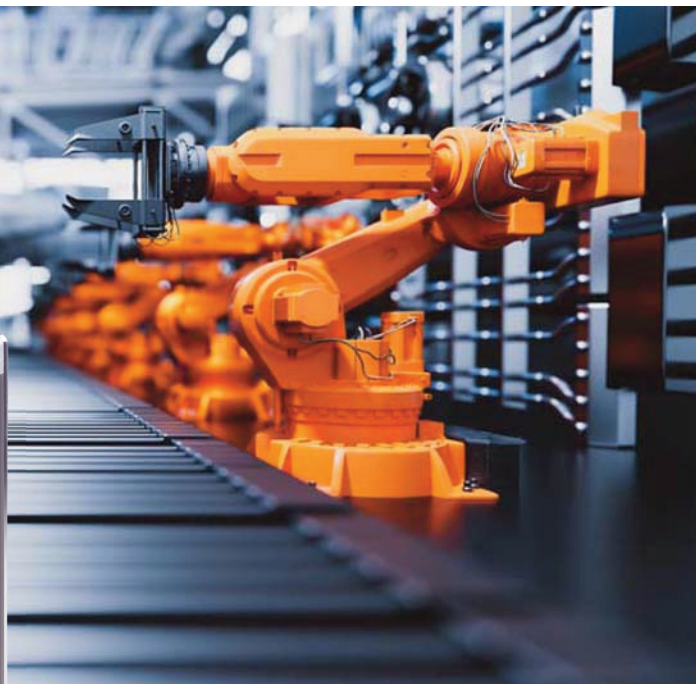

5G Sub-6 GHz



4G LTE



2G GSM



WLAN



GPS Glonass



6x SMA



Dual-SIM



E1 approval
(optional)



2 Ethernet RJ45
(optional 4)
10/100/1000
Base-T(X)



USB 3.0



RS-485



2in/2out

MC-MNR 5G Router

Technical Data

General	Description	Part-No.
Type	5G Router	194174
Dimensions (W x H x D)	44 x 105 x 124 mm	
Weight	approx. 500 g	
Supply voltage	8 to 30V DC	
Storage temperature	-40°C to +85°C	
Housing	Aluminum	
Protection class	IP20	
Mounting	DIN rail, wall mounted	
Module plugged	Quectel RM500U-EA	
Mobile 5G		
Supporting networks	UMTS Bands: B1, B2, B5, B8 LTE Bands: B1/ 2/ 3/ 4/ 5/ 7/ 8/ 20/ 28/ 38/ 40/ 41/ 66 5G Bands: 5G NR NSA: n1/ 3/ 7/ 28/ 38/ 40/ 41/ 77/ 78 5G NR SA: n1/ 3/ 5/ 7/ 8/ 20/ 28/ 38/ 40/ 41/ 66/ 77/ 78 DL 4 x 4 MIMO: n1/ 3/ 7/ 28 / 38/ 40/ 41/ 66/ 77/ 78 UL 2 x 2 MIMO: n38/ 40/ 41/ 77/ 78 DL 2 x 2 MIMO: n5/ 8/ 20	
max. Data Rates 5G SA Sub-6	2 Gbps (DL)/ 1 Gbps (UL)	
max. Data Rates 5G NSA Sub-6	2.6 Gbps (DL)/ 650 Mbps (UL)	
max. Data Rates LTE	600 Mbps (DL)/ 150 Mbps (UL)	
max. Data Rates UMTS	42.2 Mbps (DL)/ 11 Mbps (UL)	
Antenna connections	6x SMA (female)	
Controller, Memory and OS		
Prozessor	ARMv8, 64bit, Cortex A5x, Quad Core, up to 2GHz	
DRAM	LPDDR4 2 GByte	
eMMC	16 GByte	
Interfaces		
Power	Plug-in screw-type terminal	
Ethernet	2x RJ45 (optional 4x RJ45)	
Analog Input	2x 0 - 30 V + 2x 4 - 20 mA	
RS-485	on IO-Interface	
USB	3.0	
LED	8 Status LEDs + 2 LEDs for each Ethernet sockets	
WLAN	2,4 GHz	
GNSS	LC76GPBMD	
External Flash	1x Micro-SD-Card slot	
Internal slots	M.2, mPCIe	
SIM	2x nano SIM (eSIM optional)	
Digital Output	4x 0 - 30 V (open drain)	
Digital Input	4x 0..30 V (optional ignition power logic for vehicle use)	
Other properties		
Operating System	OpenWRT 24 (free programmable and configurable embedded Linux system)	
Standards and regulations		
Electromagnetic compatibility	Conformity with EMC Directive 2014/30/EU (CE-Marking), optional: ECE R10	
Security	TPM2.0, Secure boot, watchdog, development process according IEC 62443-4.1	
Delivery includes		
t.b.a.		

Mistakes and changes are reserved.

MC-MNR 5G Router

Accessories

Accessories		Part-No.
DIN mount	Clip-in for DIN Rail	t.b.a.
5G/LTE Puck Antenna	5G/4G/3G/2G, 3m RG-174, 1x SMA (male)	193874
5G/LTE MIMO x 4 SMA Antenna	5G/4G/MIMO/3G/2G, 4 x 3m LMR100, 4x SMA (male)	194062
5G/LTE MIMO wall antenna	5G/4G/MIMO/3G/2G, 2 x 2m RG-174, 2x SMA (male)	193600
5G/LTE Directional antenna	5G/4G/3G/2G, 10m LMR-195, SMA (male)	193863
Internal MiMo 4G/5G Antenna	5G/4G, 2x 3m CS32, 214 x 77 x 16.5 mm, 2x SMA (male)	194157
5G/LTE building MIMO antenna	5G/4G/3G/2G/WLAN, 2x 5m CS29, 2x SMA (male)	162531
5G MIMO/GPS roof antenna	5G MIMO/4G/3G/2G/GPS, 5 x 3m RG-174, 5x SMA (male)	193845
5G 4x4 MIMO roof antenna	5G/4G/MIMO/3G/2G, 4 x 0,3m RG-174, 4x SMA (m)	193840
5G/LTE Portable antenna	5G/4G/3G/2G, 198 mm rod length, SMA (male)	161012

Mistakes and changes are reserved.



193874



194062



193600



193863



194157




162531



193845



193840

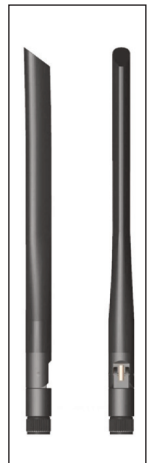

161012