


Lean Dolly 600 x 800 mm

The Lean Dolly 600 x 800 mm been specially designed to carry plastic crates and trays used in the automotive industry. Available in 1/4 pallet size, it can easily be integrated into your automated system and used with or without a drawbar.

For optimised external transport and warehousing the Lean Dolly 600 x 800 mm can be used together with the Lean adaptor pallet for the warehousing and distribution of components.

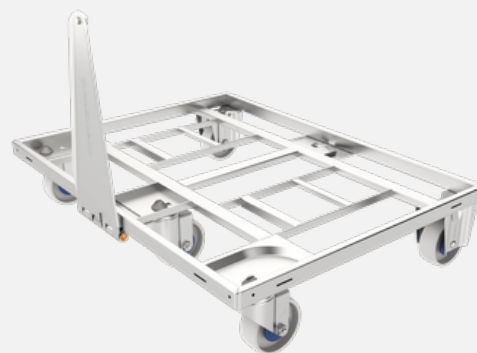

Key benefits

- ✓ Improve work flow
- ✓ Reduce handling costs
- ✓ Enable reduction of stock level
- ✓ Reduce need for floor space
- ✓ Improve ergonomics
- ✓ Fast and safe truck loading
- ✓ Optimised vehicle fill

Technical specifications

External dimensions	600 x 806 x 158 (495) mm
Tare weight	12 kg
Wheel size	100 mm
Wheel type	2 fixed, 3 swivel
Wheel material	CPD, rubber or PU
Working capacity	500 kg
Surface treatment	Zinc electroplated
Lean Adaptor pallet compatibility	Next Generation (DOS1696 & DOS1725), Type III (DOS1405)
Safe stacking up to 15 pieces	1950 mm

Images



Designed for following uses and industries



Accessories & Extra

Total brake on 1 or 2 swivel wheels	RFID ready
Strapping device	Also available in ISO and US dimensions
24" x 15" (609 x 381 mm)	24" x 22.5" (609 x 571 mm)
Compound wheel	Rubber wheel
ESD hard plastic wheel and non-marking ESD hard plastic wheel	Polyurethane wheel or polyurethane ESD wheel

Videos

[www.youtu.be/cZA7sF722Uc](https://www.youtube.com/watch?v=cZA7sF722Uc)

[k-hartwall.com](https://www.k-hartwall.com)

[linkedin.com/company/k-hartwall-oy-ab](https://www.linkedin.com/company/k-hartwall-oy-ab)

[youtube.com/user/KHartwall](https://www.youtube.com/user/KHartwall)

[instagram.com/khartwall](https://www.instagram.com/khartwall)