


HEPCO BALL SCREW

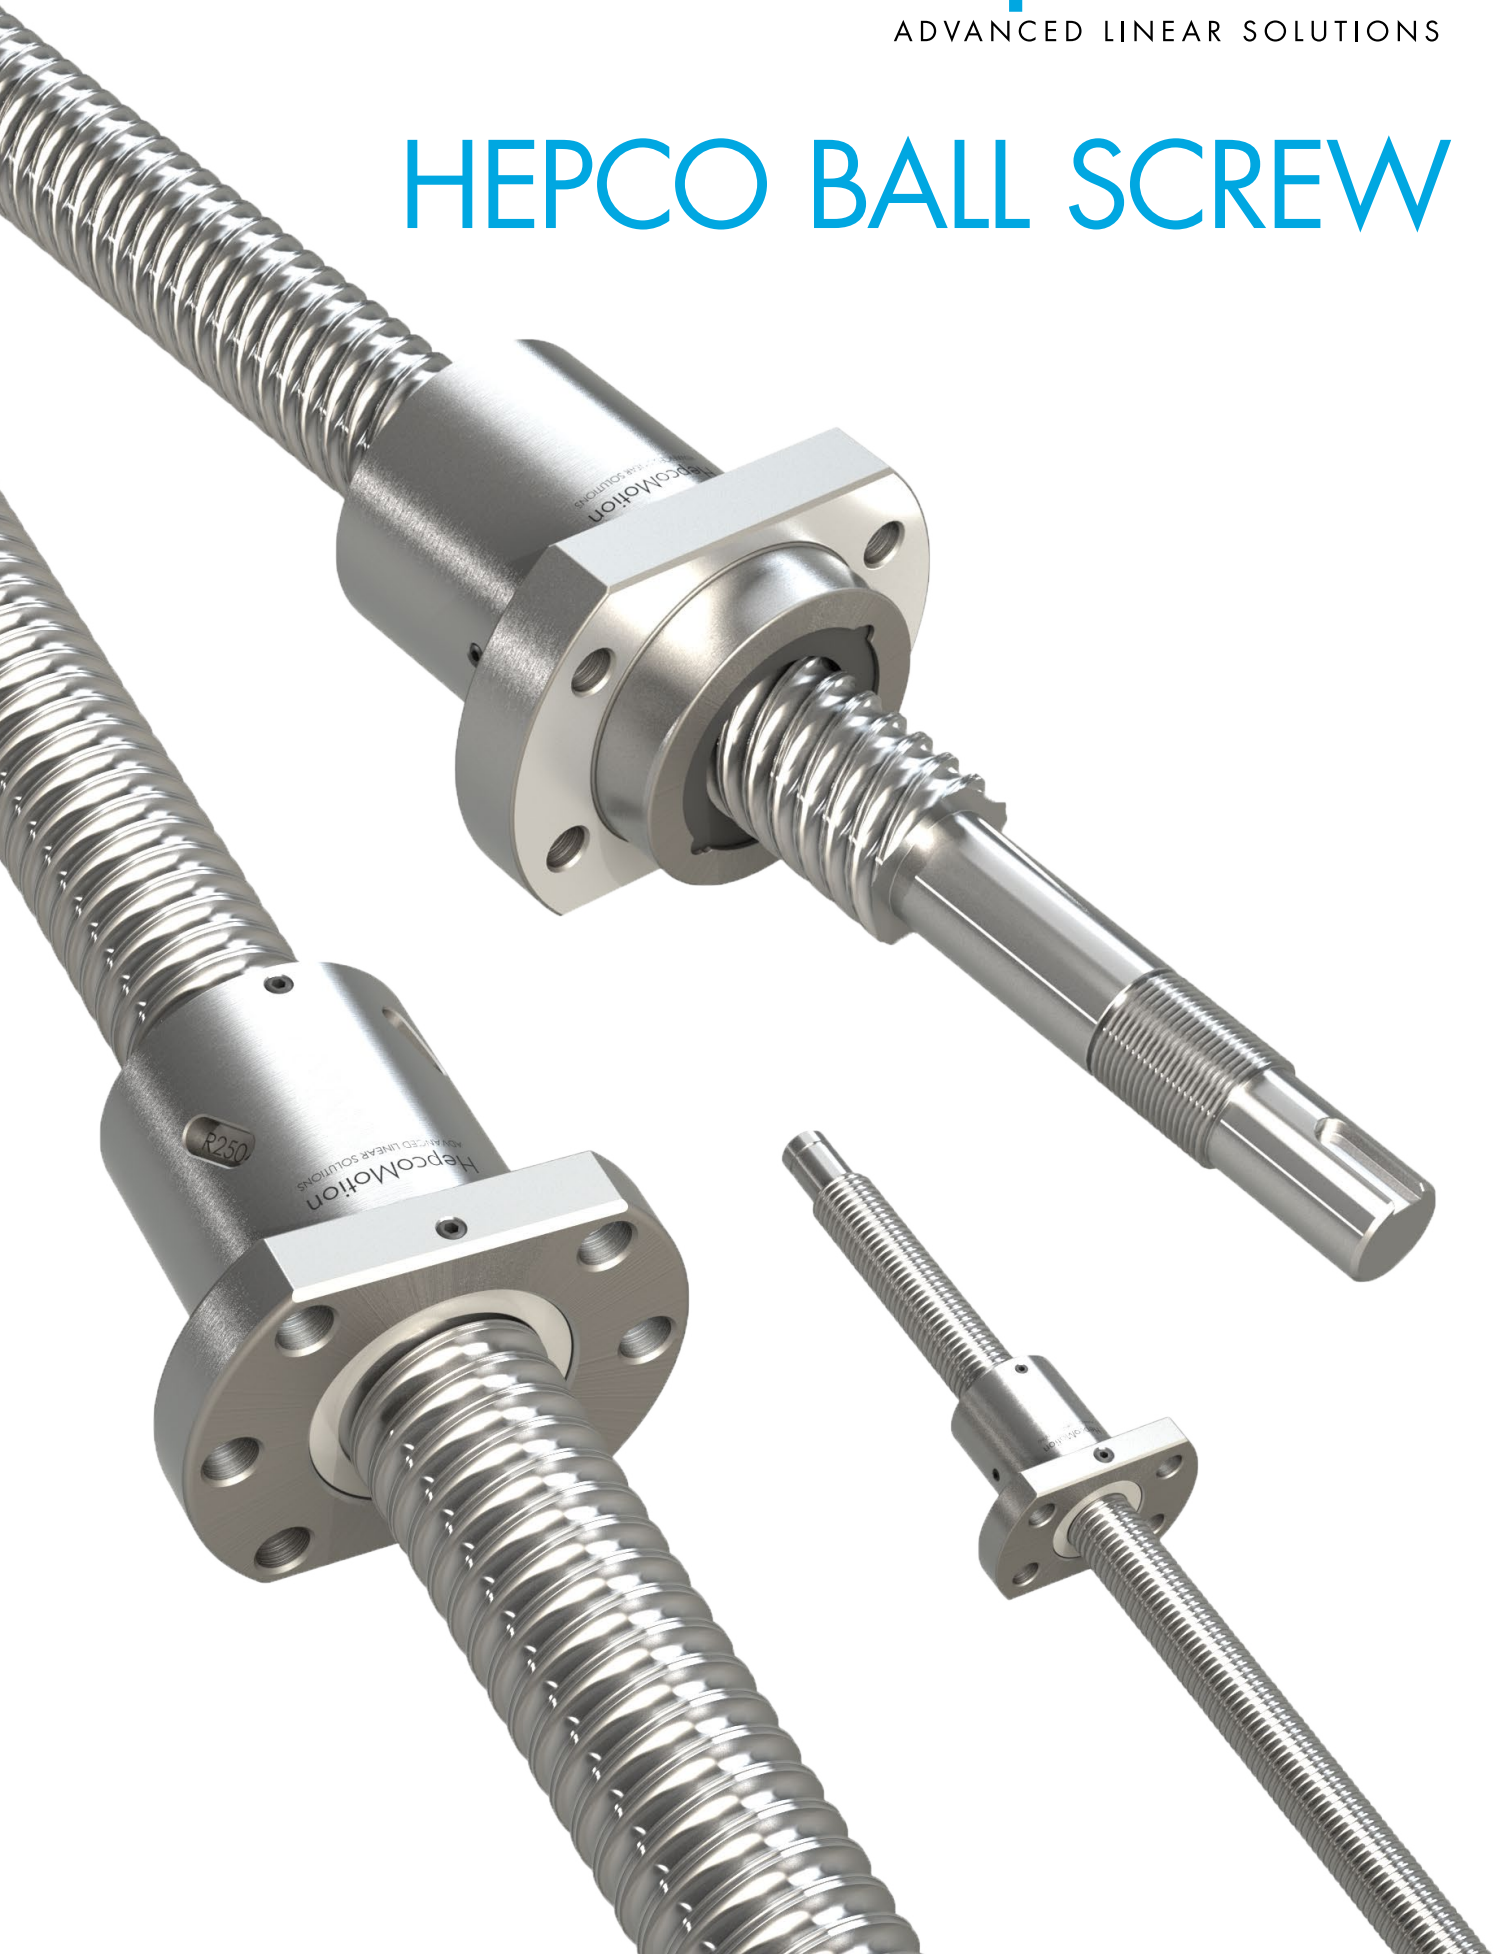

Features and Benefits		1	Ball screw and Nut Types		2
Supply options		2			
	HBSS Series - DIN Standard Series	3		HBSH Series - High Lead Screws	4
	HBSM Series - Miniature Series	5		BHF Bearing Housing - Fixed End	6
	BEK Bearing Housing - Fixed End	7		BEF & BHS Bearing Housings - Supported End	8
	Shaft End Machining Details	9			
Rotational & Critical Speed		10	Buckling Load		11
Average Speed and Load		12	Service Life		12
Torque Calculation		12	Ordering Details		13

Hepco ball screw offers a competitively priced range of Precision Rolled ball screws, Nuts and Bearings Housings. The HBSS series is a single nut DIN 69051 flange design, available in two accuracy grades (C5 and C7) with controlled play (A0) and no play (A1) nuts. For preload critical applications, the C5 grade ball screw can be supplied with a lightly preloaded nut (A2).

Complementing the range, are high lead screws (HBSH series) and miniature screws (HBSM series).

For a complete list of the accuracy and preload combinations, please refer to [2](#).



Features and Benefits

- Extensive range of sizes available on a short lead-time
- Range of preload grades
- Ball screw diameters range from Ø6mm to Ø50mm
- Select sizes available with left hand threads
- Optional machined keyway available
- Standard end machining available
- Custom end machining available, upon request



Ball screw and Nut Types

The HepcoMotion ball screw range offers three types of nut: DIN 69051 Standard, High Lead and Miniature. The table below lists the accuracy grades and levels of clearance that are available as standard, at a short lead time*1:

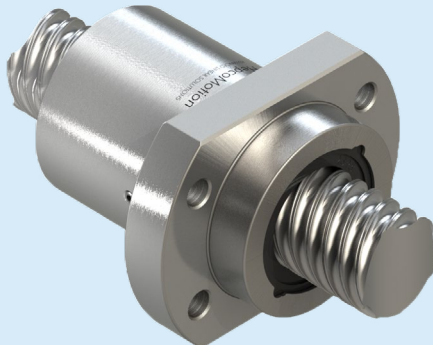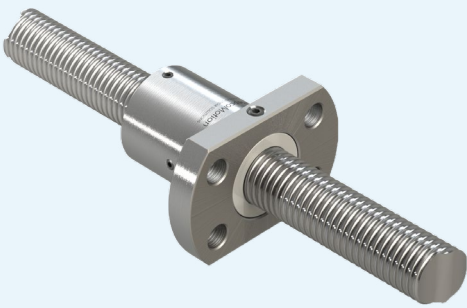Series	Type	Type	Accuracy Grade	Availability of Preload Grade		
				Light preload	No clearance	Clearance
				A2 grade	A1 grade	A0 grade
HBSS	DIN 69051		C5 (maximum lead deviation of 0.018mm per 300mm of travel)	✓	See note*2	See note*2
			C7 (maximum lead deviation of 0.050mm per 300mm of travel)	-	✓	✓
HBSH	High Lead		C5 (maximum lead deviation of 0.018mm per 300mm of travel)	✓	See note*2	See note*2
			C7 (maximum lead deviation of 0.050mm per 300mm of travel)	-	✓	✓
HBSM	Miniature		C7 (maximum lead deviation of 0.050mm per 300mm of travel)	-	-	✓

Supply Options

Ball screw units will be supplied with the ends machined and the nut assembled onto the screw. Disassembly of the nut from the screw is not possible without the aid of a special mandrel, in order to prevent the loss of the recirculating balls.

We recommend that units are purchased with the ends ready machined to one of the standard configurations, outlined in this catalogue, using the relevant end support bearing (see [9](#)).

Machining to bespoke drawing requirements is possible. Screws without end machining can also be supplied. However, it should be borne in mind that the nut will be assembled onto the screw, and care will need to be taken when machining, in order to prevent the ingress of dirt into the recirculating system.


Notes:

- Other combinations are not stocked but available on competitive lead times
- Standard accuracy-preload combinations:
 - C5 screw with A2 light preload nut
 - C7 screw with A1 no play nut
 - C7 screw with A0 axial play nut - Max. axial play for Ø16-40mm screws = 0.08mm. Max. axial play for Ø50mm screws = 0.12mm



HepcoMotion HBSS ball screws comply with DIN 69051 and range in diameters from Ø16mm to Ø50mm. This series is available in C5 or C7 accuracy grades. A selection of sizes are available with a left hand thread*1.

DIN 69051 Form B

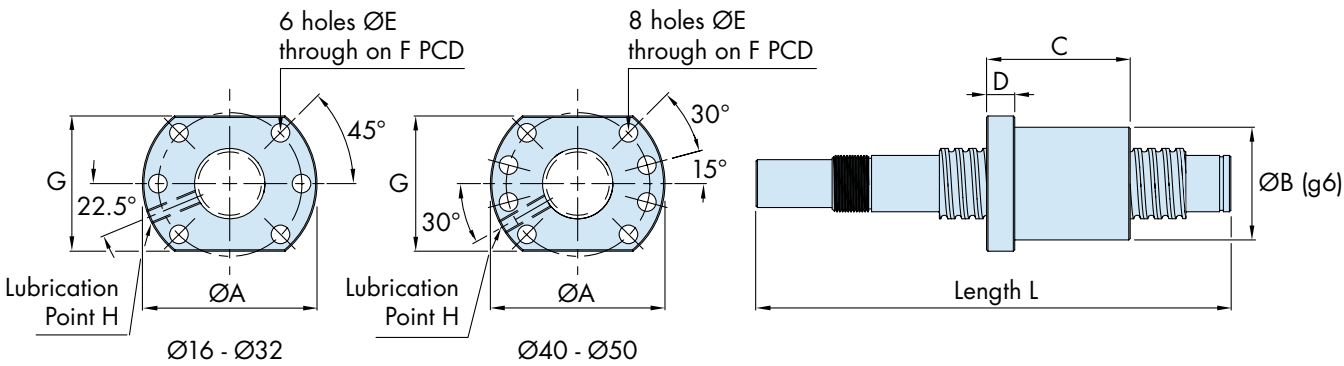

Part Number	L*2 Max	SD Screw Ø	Pitch	BCD*3	ØA	ØB g6	C	D	ØE	F	G	H	N*4 (rpm)	Load Capacity (kN)	
														Ca Basic Dynamic	Coa Basic Static
HBSS 1604 R ...	3000	16	4	16.42	48	28	45	10	5.5	38	40	M6	4260	9.4	12.5
HBSS 1605 R ...	3000	16	5	16.55	48	28	50	10	5.5	38	40	M6	4220	13.4	15.2
HBSS 1605 L ...*1	3000	16	5	16.55	48	28	50	10	5.5	38	40	M6	4220	13.4	15.2
HBSS 1610 R ...	3000	16	10	16.61	48	28	43	12	5.5	38	40	M6	4210	11.8	14.7
HBSS 2005 R ...	3000	20	5	20.59	58	36	53	10	6.6	47	44	M6	3390	15.1	19.9
HBSS 2005 L ...*1	3000	20	5	20.59	58	36	53	10	6.6	47	44	M6	3390	15.1	19.9
HBSS 2010 R ...	3000	20	10	21.03	58	36	68	10	6.6	47	44	M6	3320	16.2	19.2
HBSS 2504 R ...	3500	25	4	25.41	62	40	46	11	6.6	51	48	M6	2750	11.8	20.4
HBSS 2505 R ...	3500	25	5	25.41	62	40	53	10	6.6	51	48	M6	2750	17.0	25.8
HBSS 2505 L ...*1	3500	25	5	25.60	62	40	53	10	6.6	51	48	M6	2730	17.0	25.8
HBSS 2510 R ...	3500	25	10	25.99	62	40	85	12	6.6	51	48	M6	2690	28.8	36.9
HBSS 3205 R ...	3500	32	5	32.58	80	50	53	12	9	65	62	M6	2140	19.2	34.0
HBSS 3205 L ...*1	3500	32	5	32.58	80	50	53	12	9	65	62	M6	2140	19.2	34.0
HBSS 3210 R ...	3500	32	10	33.42	80	50	90	16	9	65	62	M6	2090	48.3	78.3
HBSS 4005 R ...	3500	40	5	40.58	93	63	56	16	9	78	70	M8	1720	21.4	43.4
HBSS 4005 L ...*1	3500	40	5	40.58	93	63	56	16	9	78	70	M8	1720	21.4	43.4
HBSS 4010 R ...	3500	40	10	41.37	93	63	93	18	9	78	70	M8	1690	54.0	100.7
HBSS 5010 R ...	3500	50	10	51.38	110	75	93	18	11	93	85	M8	1360	59.3	123.1

Notes:


- Nuts marked*1 are supplied with left hand threads. These may be subject to an extended lead time
- Lengths up to 6000mm are available un-machined for Ø25-50 ball screws. These may be subject to an extended lead time
- Ball centre diameter is abbreviated to BCD
- Characteristic speed, N, is calculated using the formula on page 10

HBSH Series - High Lead Screws



HepcoMotion.com


HepcoMotion HBSH ball screws are generally suited to applications that demand linear velocities above 0.5m/s. Please refer to [10](#) for more information on maximum speeds.
The series includes a range of screw diameters from Ø16mm to Ø50mm, and is available in C5 or C7 rolled accuracy grades*^{1,2}.

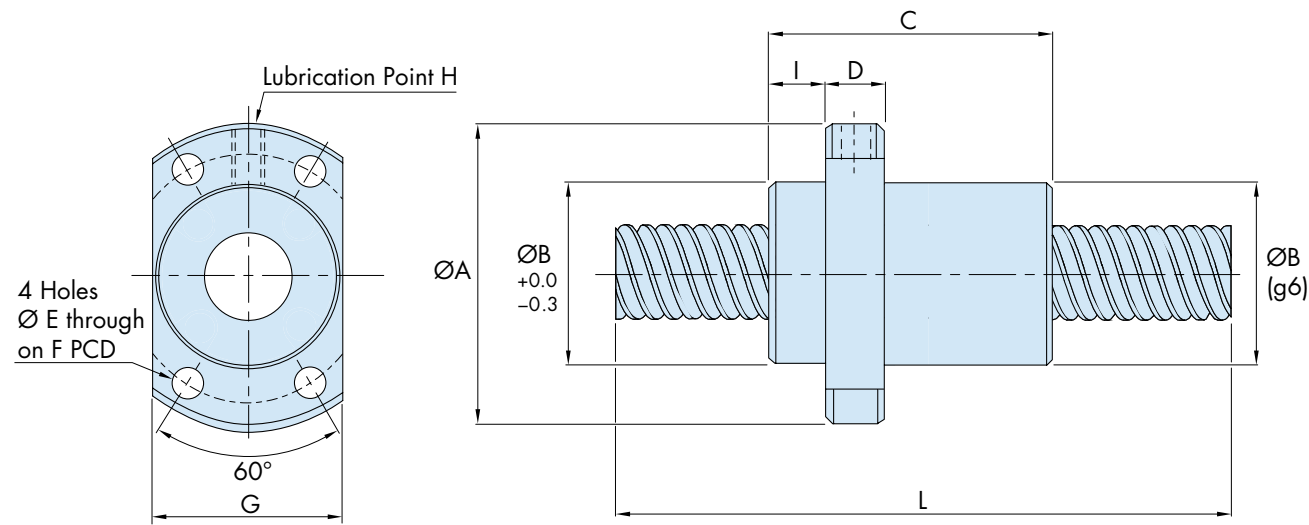

Part Number	L* ³ Max	SD Screw Ø	Pitch	BCD* ⁴	ØA	ØB	C	D	ØE	F	G	H	I	N* ⁵ (rpm)	Load Capacity (kN)	
															Ca Basic Dynamic	Coa Basic Static
HBSH 1616 R ...	3000	16	16	16.61	53	32	48	10	4.5	42	38	M6	10.5	4210	15.1	19.9
HBSH 2020 R ...	3000	20	20	20.61	62	39	55	10	5.5	50	46	M6	10.8	3390	16.6	24.6
HBSH 2525 R ...	3500	25	25	25.73	74	47	67	12	6.6	60	56	M6	11.2	2720	24.8	38.5
HBSH 3232 R ...	3500	32	32	33.04	92	58	82	15	9	74	68	M6	14	2110	35.8	60.7
HBSH 4040 R ...	3500	40	40	41.44	114	73	100	17	11	93	84	M6	17	1680	57.8	117.5
HBSH 5050 R ...	3500	50	50	52.25	135	90	125	20	14	112	92	M6	21.5	1330	88.2	192.4


- Notes:
- Standard accuracy-preload combinations:
 - C5 screw with A2 light preload nut
 - C7 screw with A1 no play nut
 - C7 screw with A0 axial play nut - Max. axial play for Ø16–40mm screws = 0.08mm. Max. axial play for Ø50mm screws = 0.12mm
 - If the accuracy-preload combination required is not listed, please contact Hepco
 - Lengths up to 6000mm are available un-machined for Ø25-50 ball screws. These may be subject to an extended lead time
 - Ball centre diameter is abbreviated to BCD
 - Characteristic speed, N, is calculated using the formula on page 10

HBSM Series - Miniature Series



HepcoMotion.com

HepcoMotion HBSM ball screws offer high positional resolution and a compact design*¹.
The series includes a range of screw diameters from Ø6mm to Ø14mm, and is available in the C7 rolled accuracy grade, as standard*^{2,3}.

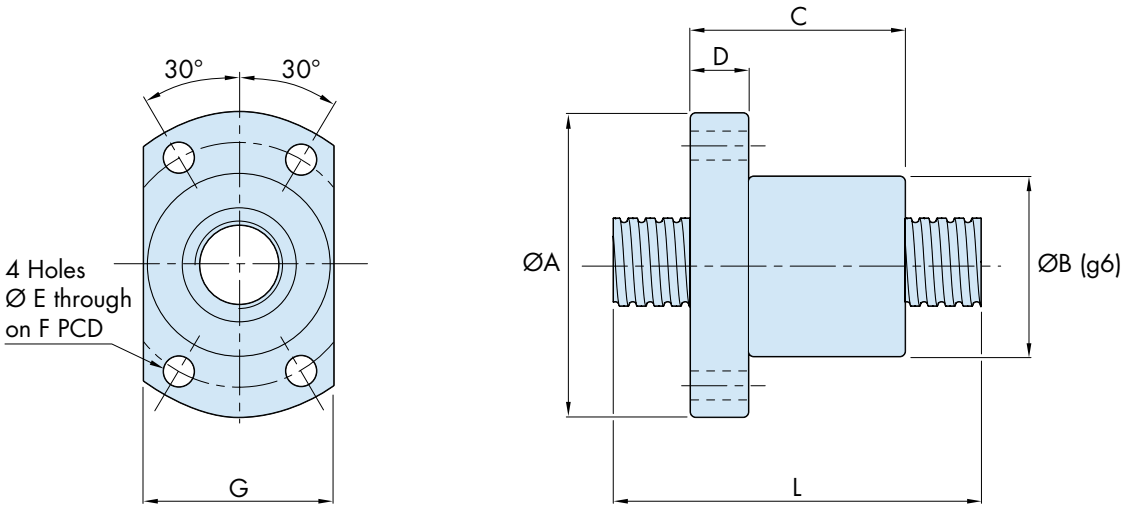


Part Number	L Max	SD Screw Ø	Pitch	BCD* ⁴	ØA	ØB g6	C	D	ØE	F	G	N* ⁵ (rpm)	Load Capacity (kN)	
													Ca Basic Dynamic	Coa Basic Static
HBSM 0601 R ...	900	6	1	6.28	24	12	18	3.5	3.4	18	16	11140	1.11	1.23
HBSM 0801 R ...	3000	8	1	8.23	27	14	20	4	3.4	21	18	8500	1.26	1.62
HBSM 0825 R ...	3000	8	2.5	8.40	29	16	26	4	3.4	23	20	8330	2.15	2.39
HBSM 1002 R ...	3000	10	2	10.42	35	18	28	5	4.5	27	22	6710	2.40	3.02
HBSM 1004 R ...	3000	10	4	10.66	46	26	35	10	4.5	36	28	6560	4.72	4.89
HBSM 1202 R ...	3000	12	2	12.42	37	20	28	5	4.5	29	24	5630	2.65	3.77
HBSM 1205 R ...	3000	12	5	12.34	48	28	35	6	5.5	39	30	5670	5.14	5.94
HBSM 1402 R ...	3000	14	2	14.37	40	21	28	6	5.5	31	26	4870	2.83	4.40

- Notes:
- Please note that HBSM nuts do not have a lubrication port
 - Standard accuracy-preload combination: C7 screw with axial play nut (A0) - Maximum axial play = 0.05mm
 - If the accuracy-preload combination required is not standard, please contact Hepco
 - Ball centre diameter is abbreviated to BCD
 - Characteristic speed, N, is calculated using the formula on page 10

HepcoMotion BHF bearing housings are suitable for DIN 69051 standard and high lead ball screws. The housings are made from chemically blackened steel and contain a pair of matched angular contact bearings, to provide accurate radial and axial location for the ball screw.

On installation, the locking nut should be fully tightened and locked in place using the grub screw.

Standard machined 'Fixed Ends' fit into these housings (see Figure A on [9](#)).

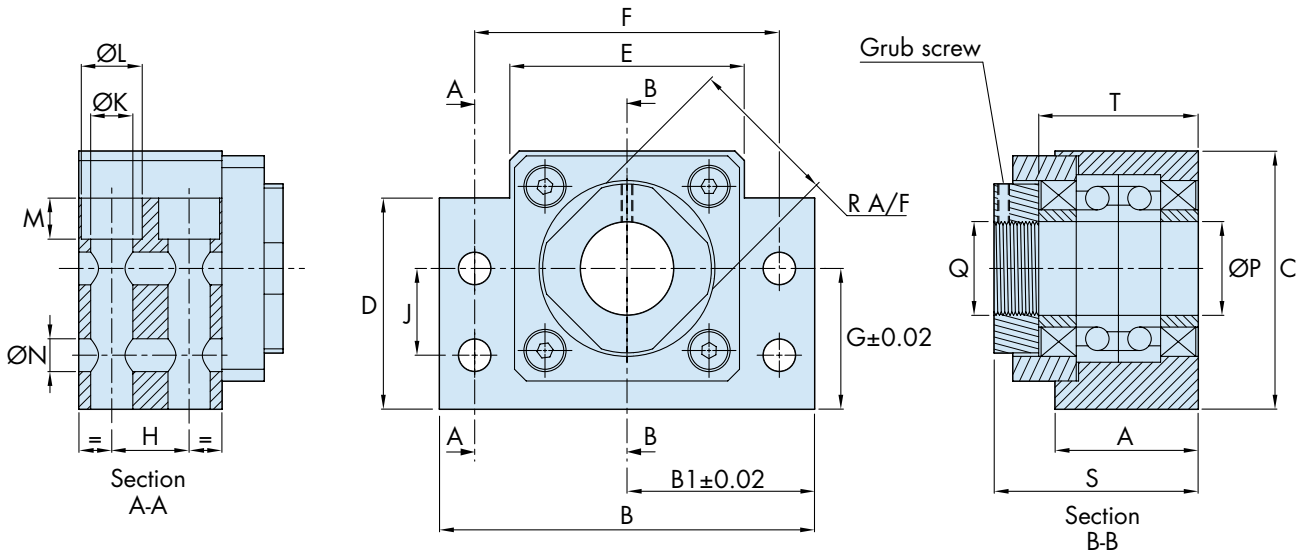


Part Number	Use With Ball Screw Ø	A	B	B1	C	D	E	F	G	H	J	ØK	ØL	M	ØN	ØP	Q	R	S	T
BHF 16	16	25	60	30	43	35	34	46	25	13	18	6.6	10.8	6	5.5	12	M12x1	19	34	26
BHF 20	20	27	70	35	48	38	40	54	28	15	18	6.6	11	6	5.5	15	M15x1	22	38	30
BHF 25	25	35	86	43	64	55	50	68	39	19	28	9	14	8.5	6.6	17	M17x1	24	51	38
BHF 32	32	35	88	44	60	50	52	70	34	19	22	9	14	8.5	6.6	20	M20x1	30	51	40
BHF 40	40	45	128	64	89	78	76	102	51	23	33	14	20	13	11	30	M30x1.5	40	70	50
BHF 50	50	61	160	80	110	90	100	130	60	33	37	18	26	17.5	14	40	M40x1.5	50	91	66

Load Capacity (kN)		
Part Number	Ca Basic Dynamic	Coa Basic Static
BHF 16	7.60	9.03
BHF 20	7.99	10.5
BHF 25	14.1	18.2

Load Capacity (kN)		
Part Number	Ca Basic Dynamic	Coa Basic Static
BHF 32	14.1	20.0
BHF 40	29.5	44.8
BHF 50	46.5	76.1

Illustration of Hepco ball screw fitted with Fixed End and Supported End bearing housings:

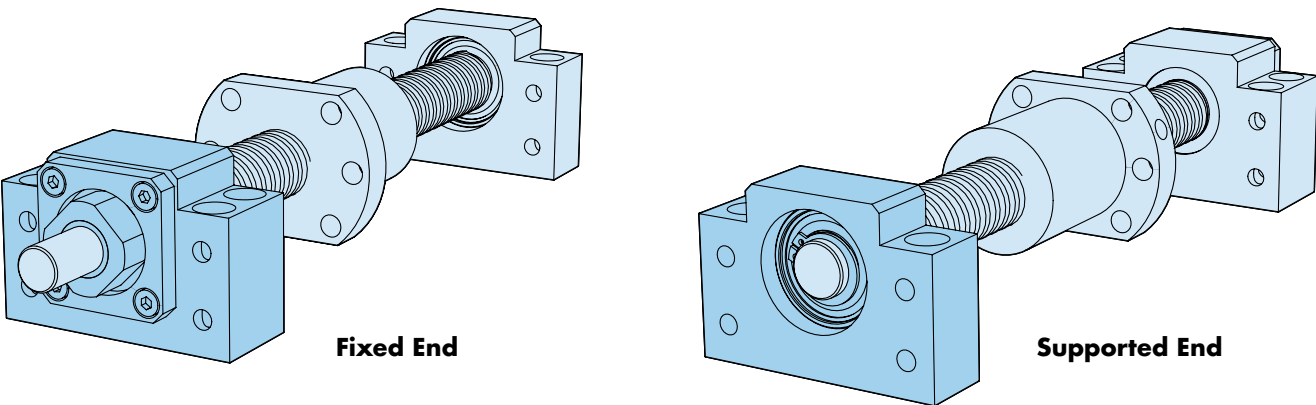


HepcoMotion BEK bearing housings are suitable for miniature ball screws. The housings are made from chemically blackened steel and contain a pair of matched angular contact bearings, to provide accurate radial and axial location for the ball screw.


On installation, the locking nut should be fully tightened and locked in place using the grub screw.

Standard machined 'Fixed Ends' fit into these housings (see Figure A on [9](#)).

BEK 8 & BEK 10

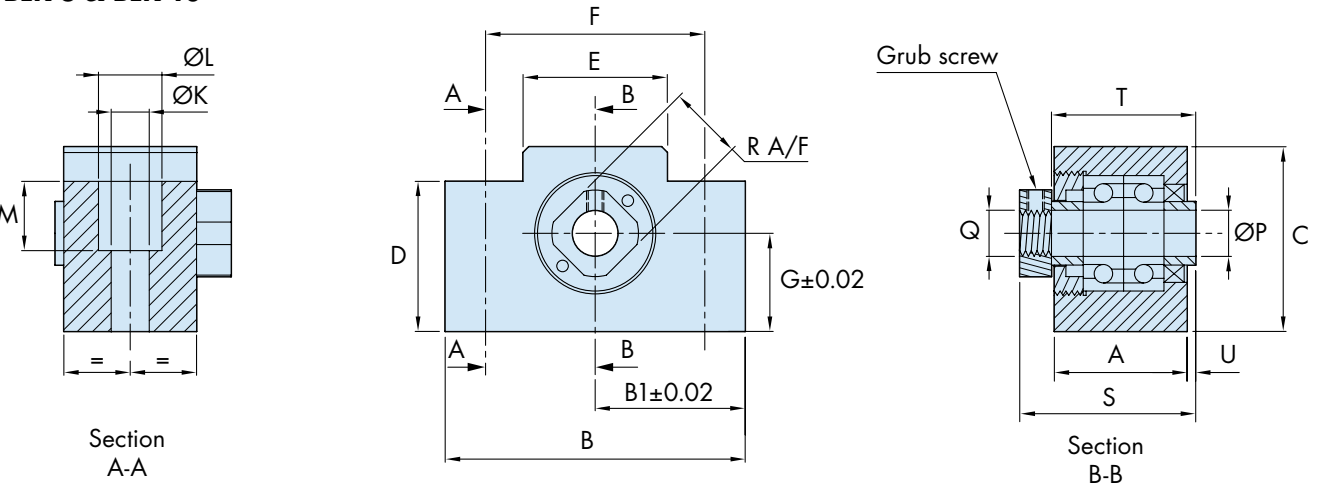

BEK 12 & BEK 14

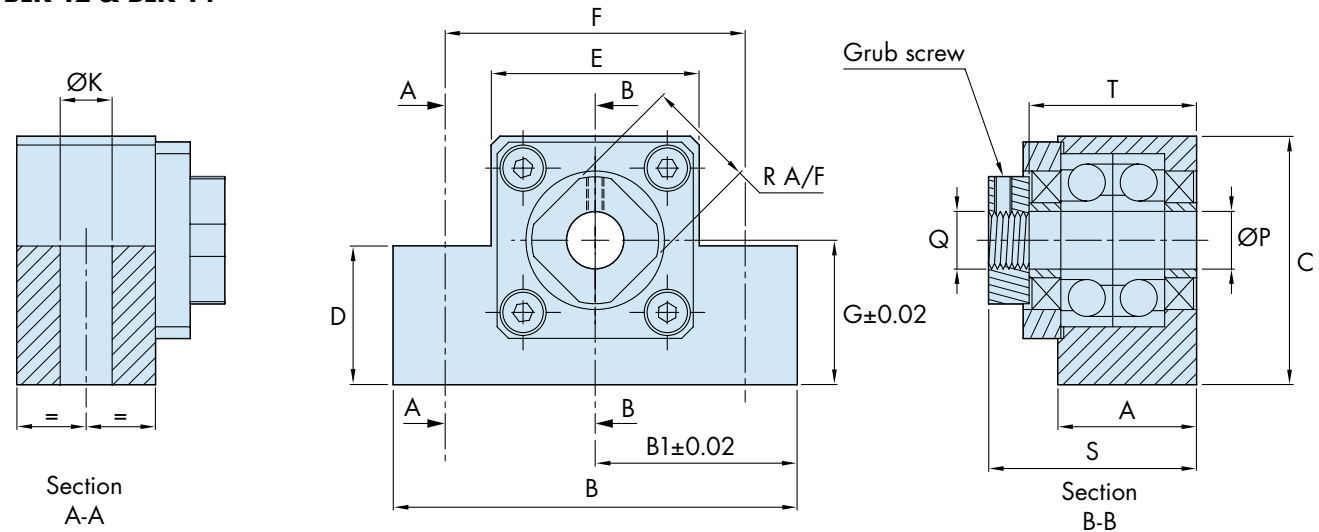

Part Number	Use With Ball Screw Ø	A	B	B1	C	D	E	F	G	ØK	ØL	M	ØP	Q	R	S	T	U
-	6	Standard bearing housings are not available																
BEK 8	8	20	42	21	25	20	18	30	13	5.5	9.5	11	6	M6x0.75	12	29	24.5	3.5
BEK 10	10	23	52	26	32	26	25	38	17	6.6	11	12	8	M8x1	14	34	27.5	3.5
BEK 12	12	24	70	35	43	24	36	52	25	9	-	-	10	M10x1	16	36	28	-
BEK 14	14	24	70	35	43	24	36	52	25	9	-	-	12	M12x1	19	36	28	-

Load Capacity (kN)		
Part Number	Ca Basic Dynamic	Coa Basic Static
BEK 8	3.67	3.34
BEK 10	2.24	2.60

Load Capacity (kN)		
Part Number	Ca Basic Dynamic	Coa Basic Static
BEK 12	7.01	7.88
BEK 14	7.60	9.03

Rotational Speed

The speed of a ball screw is generally specified in terms of its linear velocity. The rotational speed is calculated using the following equation:


$$n = \frac{v}{P} \times 10^3$$

n = rotational speed (rpm)
 v = linear velocity (m/min)
 P = pitch (mm)

The rotational speed should not exceed the Critical and Characteristic Speeds, as specified below:

Critical Speed

The critical speed is the speed at which the ball screw will resonate at its natural frequency. It includes a 20% safety factor. The permissible maximum rotational speed for any size and length of ball screw depends on the diameter of the screw, end fixing and free length L, and can be taken from the chart below. The four scales correspond to the four mounting options.

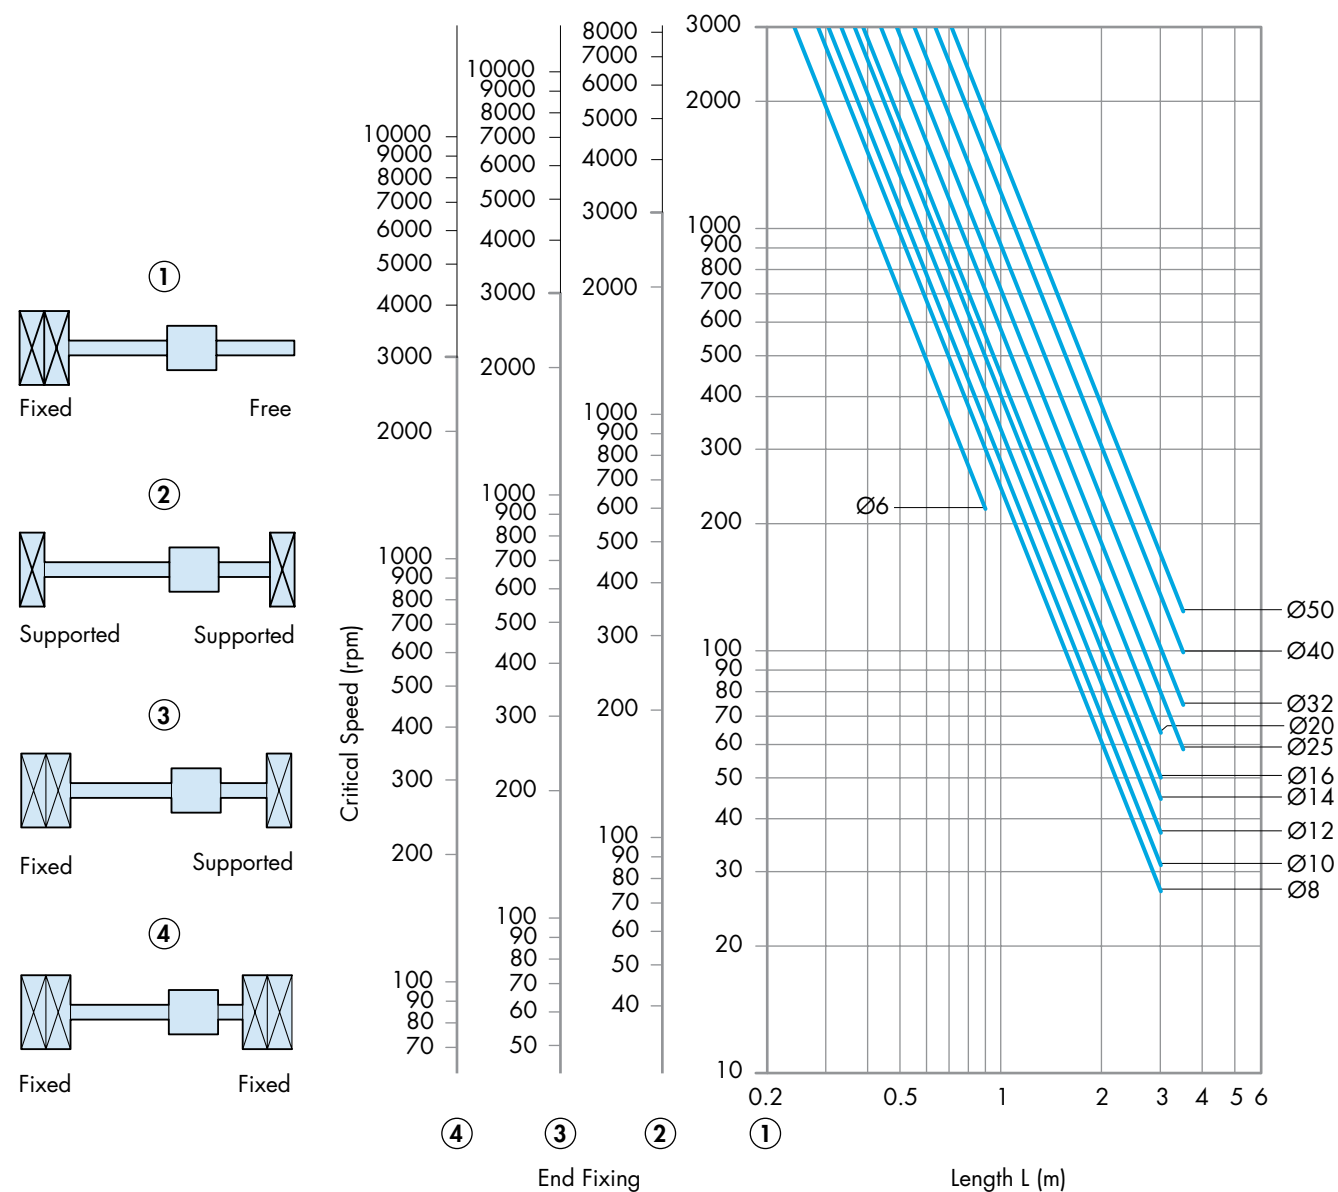


Characteristic Speed

The characteristic speed is the rotational speed limit of the recirculation system in the nut. Exceeding this speed may lead to a reduction in the life of the mechanism. The ball circle diameter, BCD, can be found in the tables of the respective product pages.

$$\text{Characteristic speed, } N \text{ (rpm)} = \frac{70,000}{\text{Ball circle diameter, BCD (mm)}}$$

Buckling Load

The graph below shows the maximum axial compressive load which would cause the ball screw to bend or buckle. This maximum load depends on the diameter of the ball screw, the method of end fixing and free length L. The four scales correspond to the four mounting options. The chart includes a safety factor of 2.

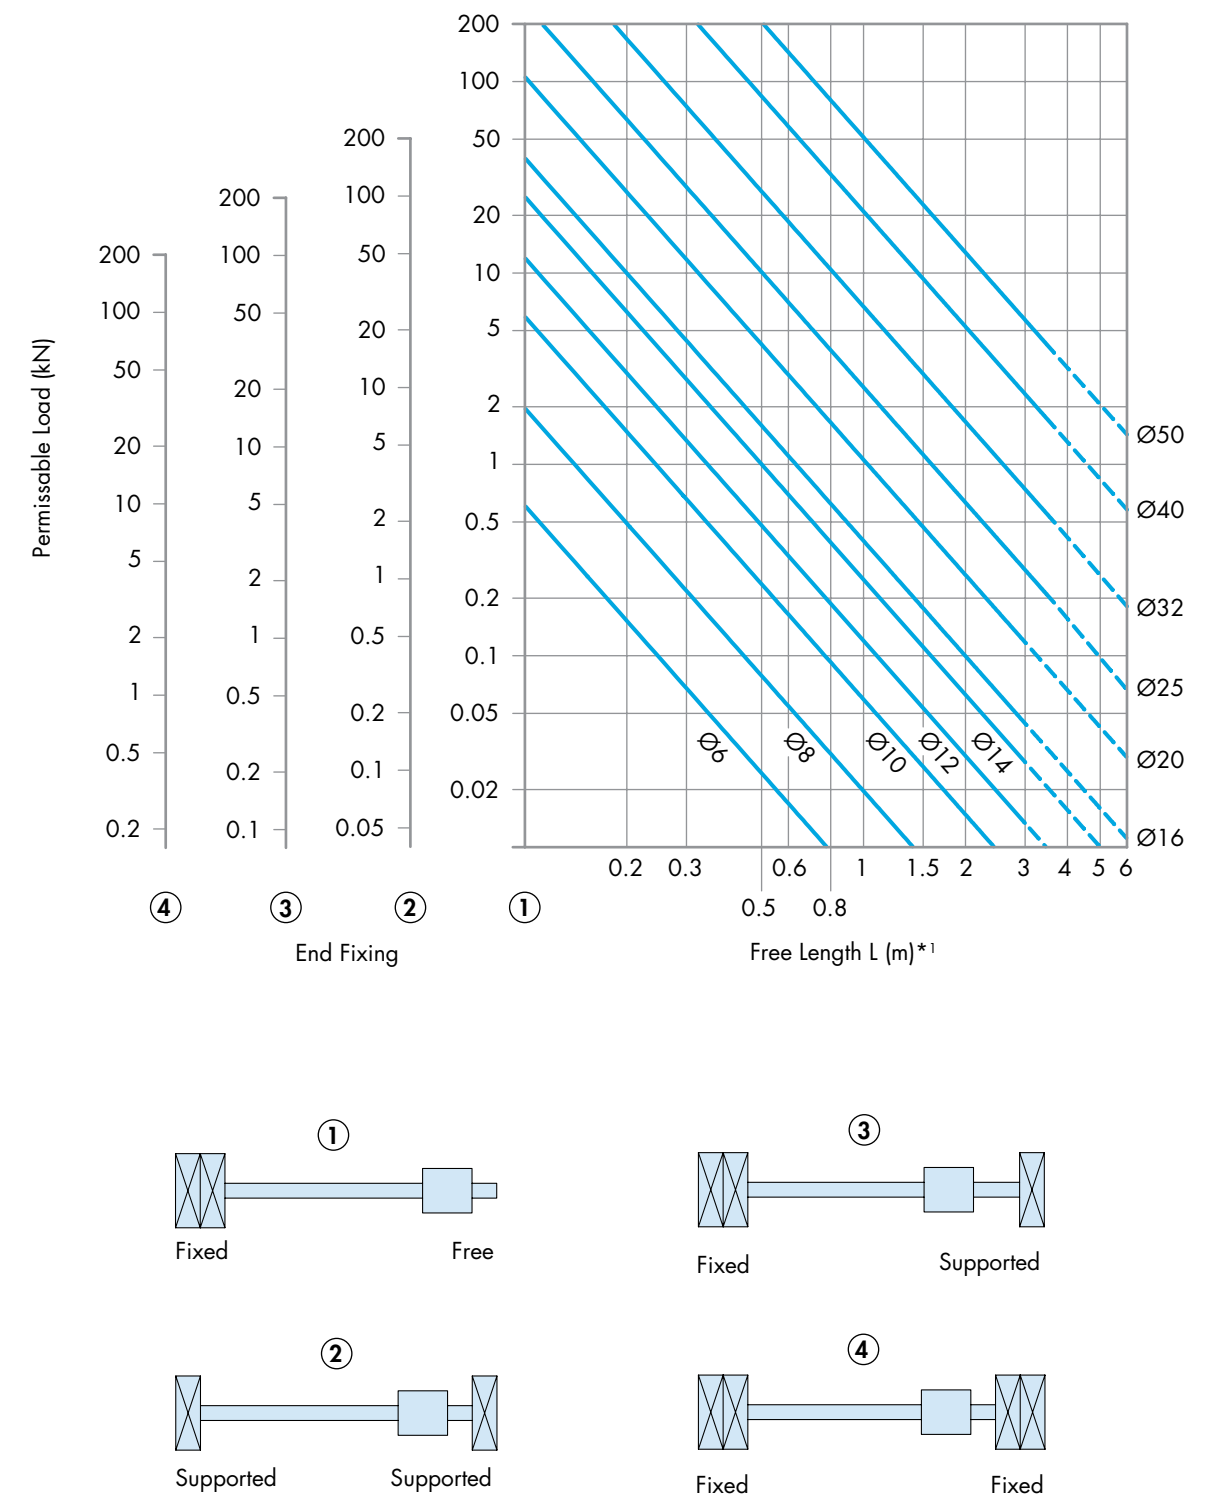

Note:

- The dashed section of the line indicates where the length exceeds the L max dimension referenced on the respective product pages. Longer lengths are available at extended lead times. Please contact Hepco's technical department for more information

Average Speed and Average Load

Where the speed varies through the machine cycle, average speed is calculated as follows:

$$n_m = \frac{q_1 \times n_1}{100} + \frac{q_2 \times n_2}{100} + \dots + \frac{q_x \times n_x}{100}$$

n_m = average speed (rpm)
 q = time fraction (%)

Where the load varies, the effective load is calculated as follows:

$$F_m = \sqrt[3]{\frac{F_1^3 \times q_1}{100} + \frac{F_2^3 \times q_2}{100} + \dots + \frac{F_x^3 \times q_x}{100}}$$

F_m = average load

Where the load and speed varies, the effective load is calculated as follows:

$$F_m = \sqrt[3]{\frac{F_1^3 \times n_1 \times q_1}{100 \times 100} + \frac{F_2^3 \times n_2 \times q_2}{100 \times 100} + \dots + \frac{F_x^3 \times n_x \times q_x}{100 \times 100}}$$

Service Life

The basic life is expressed by the number of revolutions that will be attained or exceeded by 90% of a representative sample of identical ball screws before the first signs of material fatigue become evident. Life in hours can be calculated by using the average speed.

$$L_{10} = \left(\frac{Ca}{F_m} \right)^3 \times 10^6$$

L_{10} = service life (revolutions)
 F_m = effective load (kN)
 Ca = dynamic capacity (kN)

$$L_h = \frac{L_{10}}{60n_m}$$

L_h = service life (hours)
 n_m = average speed (rpm)

Torque Calculation

Input torque, for conversion of rotary motion to linear motion:

$$T_{in} = \frac{F \times P}{2000 \times \pi \times \eta}$$

T_{in} = drive torque (Nm)
 F = operating load (N)
 P = lead (mm)
 η = efficiency (approx 0.9)

Output torque, for conversion of linear motion to rotary motion:

$$T_{out} = \frac{F \times P \times \eta'}{2000 \times \pi}$$

T_{out} = transmitted torque (Nm)
 η' = efficiency (approx 0.8)

Ball screw units will be supplied assembled with ends machined ready for mounting, or assembled with plain ends according to the customer's order. To order separate ball screw or nut components, please see below.

Ordering Details

Nut:

Part number **HBSS 16 05 R C7 A0**

Accuracy grade (C...) preload (A...) combination
 Standard options: **C5 A2***, **C7 A1***, or **C7 A0**
 * Option is not available as standard on HBSM type.
 Please contact Hepco, to check availability.

Screw:

Screw reference **HBS 16 05 R C7 1000 (A) L (B) (K)**

Diameter (mm) **16**
 Pitch (mm) **05**
 Thread direction: **R** for right hand or **L** for left hand
 Accuracy grade: **C5** or **C7**
 Overall length (mm) **1000**

(A) - Fixed End (Figure A) machining
 Leave blank if not required (see )
(L) - Nut orientation: **L** for left-facing flange,
R for right-facing flange (see diagram below)
(B) - Supported End (Figure B) machining
 Leave blank if not required (see )
(K) - Optional keyway
 Leave blank if not required

Fixed End Bearing Housing:

Part number **BHF 16**
 (Screw diameter in mm)


Supported End Bearing Housing:

Part number **BHS 16**
 (Screw diameter in mm)

Diagram showing standard end machining and nut orientation designations:


Example 1

Ball screw has standard machining (**A** on left hand end, **B** on right hand end).
 Nut flange is left-facing (**L**).

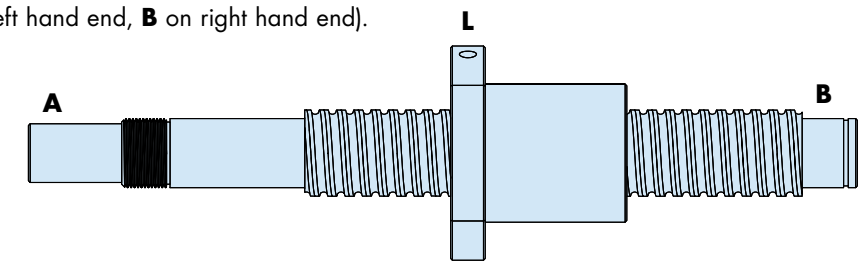

Example 2

Ball screw has standard machining (**A** on left hand end, **B** on right hand end).
 Nut flange is right-facing (**R**).

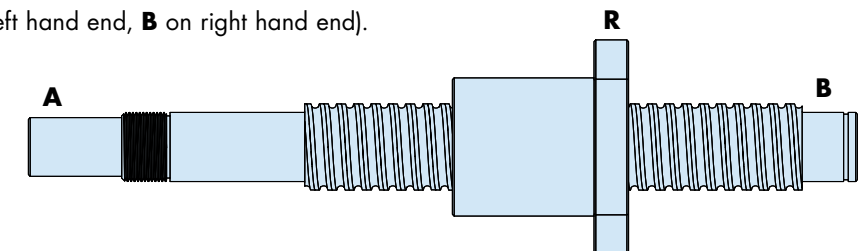

CATALOGUE No. HBS 01 UK © 2022 Hepco Slide Systems Ltd.


Reproduction in whole or part without prior authorisation from Hepco is prohibited. Although every effort has been made to ensure the accuracy of the information in this catalogue, Hepco cannot accept liability for any omissions or errors. Hepco reserves the right to make alterations to the product resulting from technical developments.

Many Hepco products are protected by: Patents, Copyright, Design Right or Registered Design. Infringement is strictly prohibited and may be challenged in law. The Customer's attention is drawn to the following clause in Hepco's conditions of sale:

'It shall be the Customer's sole responsibility to ensure that goods supplied by Hepco will be suitable or fit for any particular application or purpose of the Customer, whether or not such application or purpose is known to Hepco. The Customer will be solely responsible for any errors in, or omissions from, any specifications or information the Customer provides. Hepco will not be obliged to verify whether any such specifications or information are correct or sufficient for any application or purpose.'


Hepco's full conditions of sale are available on request and will apply to all quotations and contracts for the supply of items detailed in this catalogue.

HepcoMotion is the trading name of Hepco Slide Systems Ltd.



GV3

Linear Guidance and Transmission System



HDS2

Heavy Duty Slide System



PRT2

Ring Slides and Track System




HDRT

Heavy Duty Ring Slides and Track System




SL2

Stainless Steel Based Slide System




HLG

Hepco Ball Guides




SBD

Sealed Belt Drive



MCS

Aluminium Frame and Machine Construction System




HDLS

Heavy Duty Driven Linear System



DLS

Linear Transmission and Positioning System




HTS

Telescopic Ball Bearing Slides




HPS

Powerslide-2 Guided Rodless Cylinder




MHD

Heavy Duty Track Roller Guidance System



DTS

Driven Track System




GFX

Hepco Guidance System for Beckhoff XTS



HBS

Ball Screw Assemblies



PDU2

Profile Driven Unit




PSD120

Profile Screw Driven Unit



SHAFT

Precision Steel and Aluminium Shaft




BALL BUSHINGS

Linear Bearing System



DUALVEE®

Single Edge Slide System



LoPro®

Aluminium Based Slide System



UtiliTrak®

Lightweight U Channel Guideway

For further information on HepcoMotion® products and details of worldwide representation, please visit:

HepcoMotion.com

HepcoMotion Group Headquarters

www.hepcotion.com

Lower Moor Business Park
Tiverton Way, Tiverton
EX16 6TG
England

Tel: +44 (0)1884 257000
E-mail: sales@hepcotion.com

HepcoMotion Germany

(Also covering Austria & German-speaking Switzerland)

www.hepcotion.com/de

Tel: +49 (0) 9128 92710
Email: info.de@hepcotion.com

HepcoMotion Spain

(Also covering Portugal)

www.hepcotion.com/es

Tel: +34 93 205 84 47
Email: info.es@hepcotion.com

HepcoMotion France

(Also covering French-speaking Switzerland)

www.hepcotion.com/fr

Tel: +33 (0)1 34 64 30 44
Email: info.fr@hepcotion.com

HepcoMotion South Korea

www.hepcotion.co.kr

Tel: +82 (0) 31 352 7783
Email: sales.korea@hepcotion.com

HepcoMotion Benelux

(Covering Belgium, Luxembourg & Netherlands)

www.hepcotion.com/nl

Tel: +31 (0) 492 551290
Email: info.nl@hepcotion.com

HepcoMotion China

www.hepcotion.com.cn

Tel: +86 21 5648 9055
Email: sales.china@hepcotion.com