


# 1000 SERIES

europascal  
Calibration Experts

**TRANSMILLE**  
SOLUTIONS IN CALIBRATION

## ULTRA PORTABLE CALIBRATOR

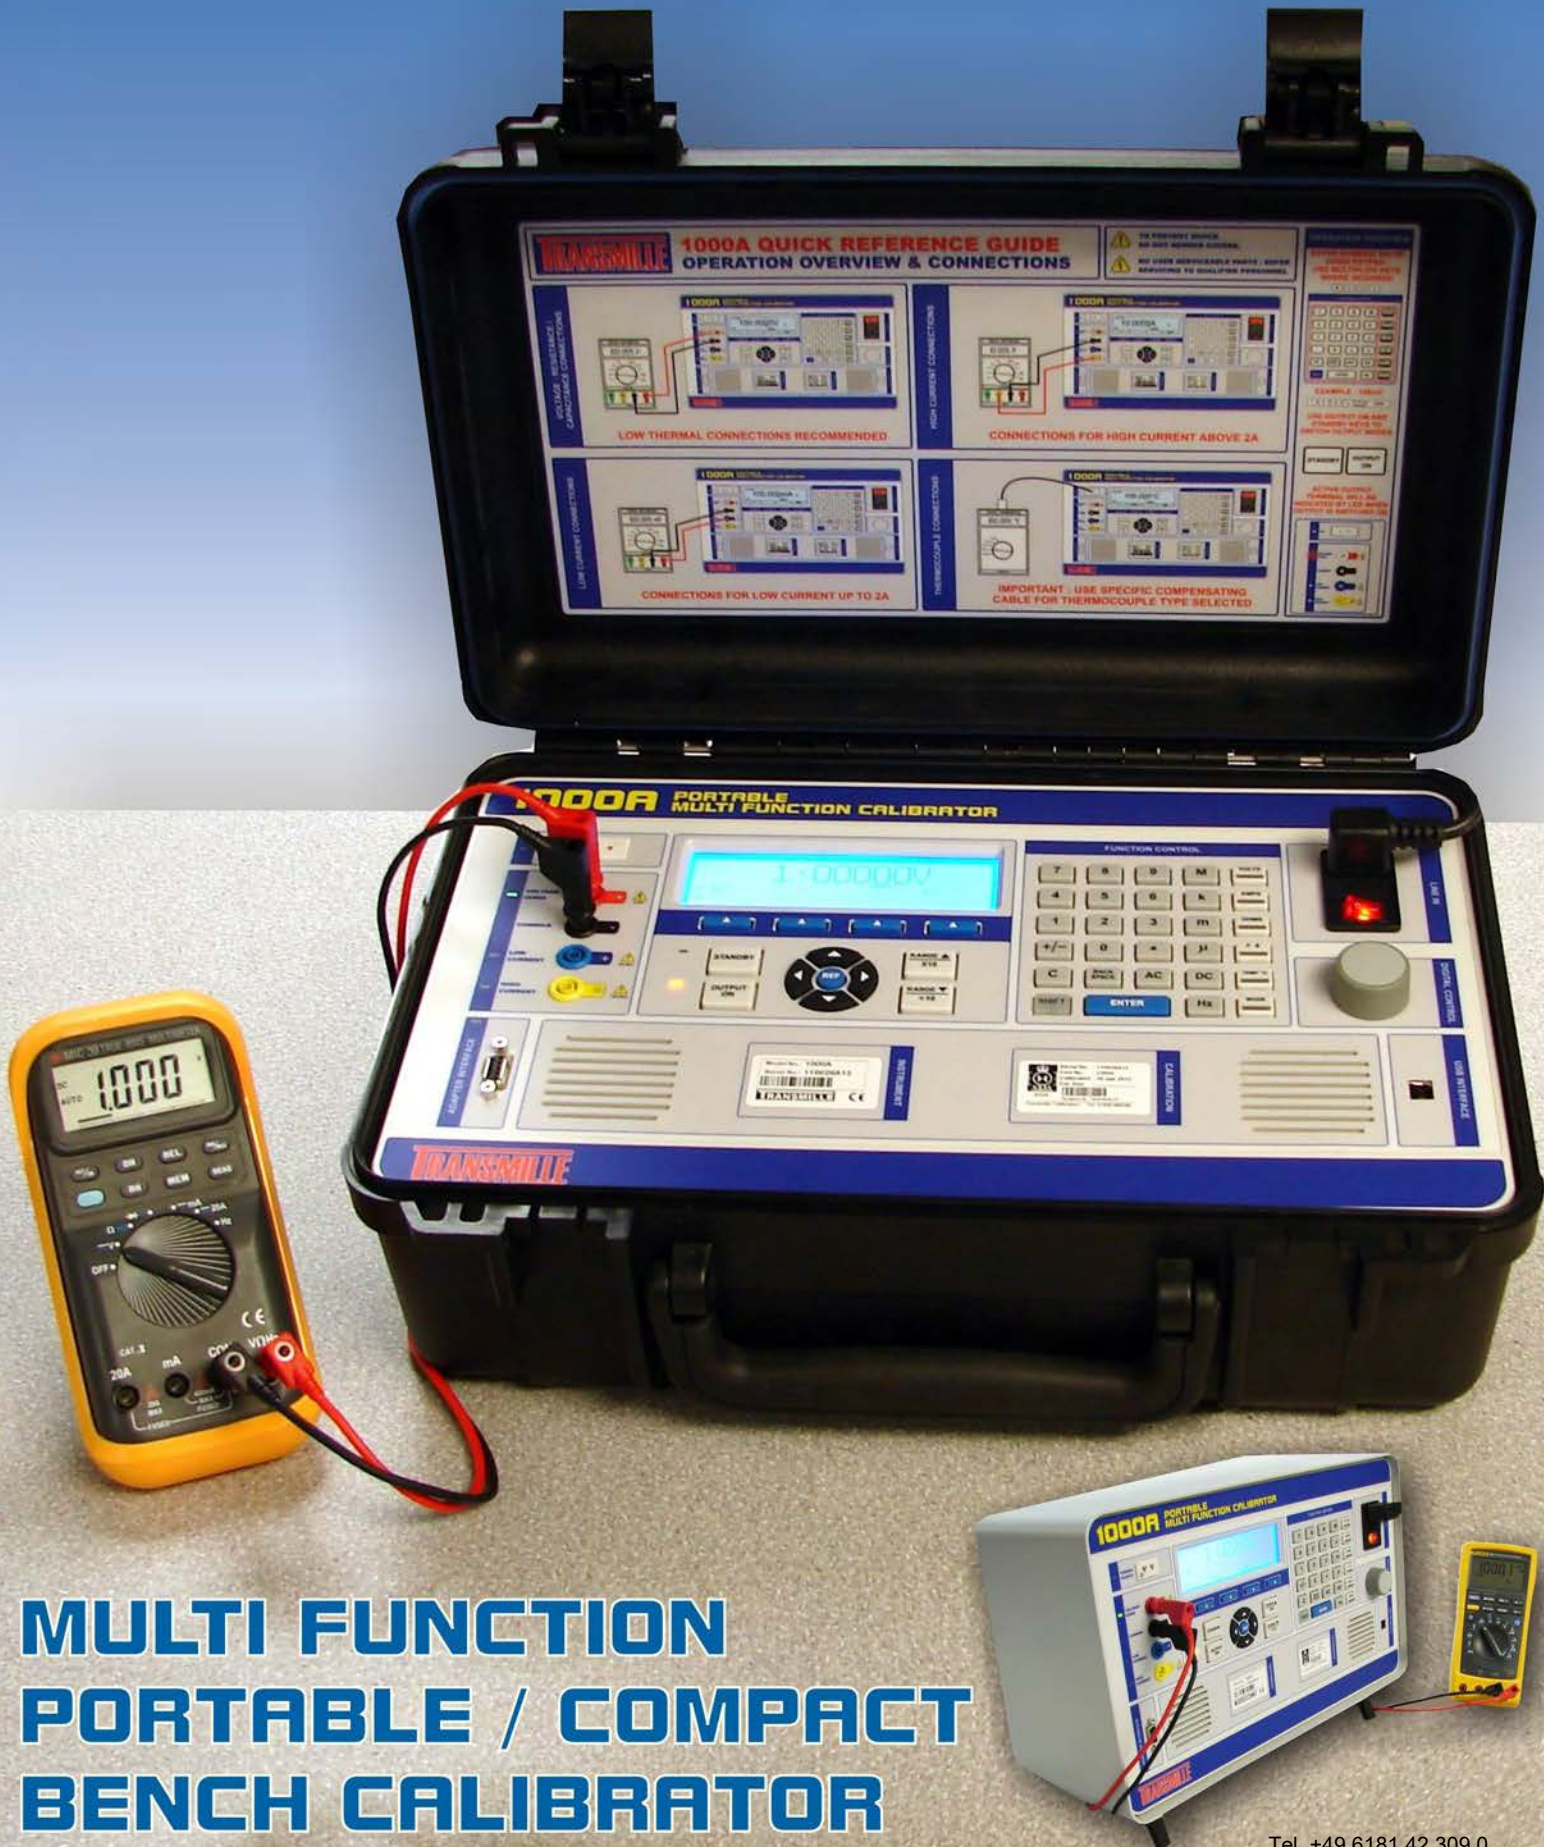

## MULTI FUNCTION PORTABLE / COMPACT BENCH CALIBRATOR




## ULTRA PORTABLE MULTI FUNCTION CALIBRATOR

### 1000 SERIES

**TRANSMILLE**  
SOLUTIONS IN CALIBRATION

#### FULL FUNCTION ULTRA PORTABLE CALIBRATOR

COMPACT, FULL FUNCTION CALIBRATOR WITH AC/DC 1000V / 10A PLUS RESISTANCE & CAPACITANCE & MORE

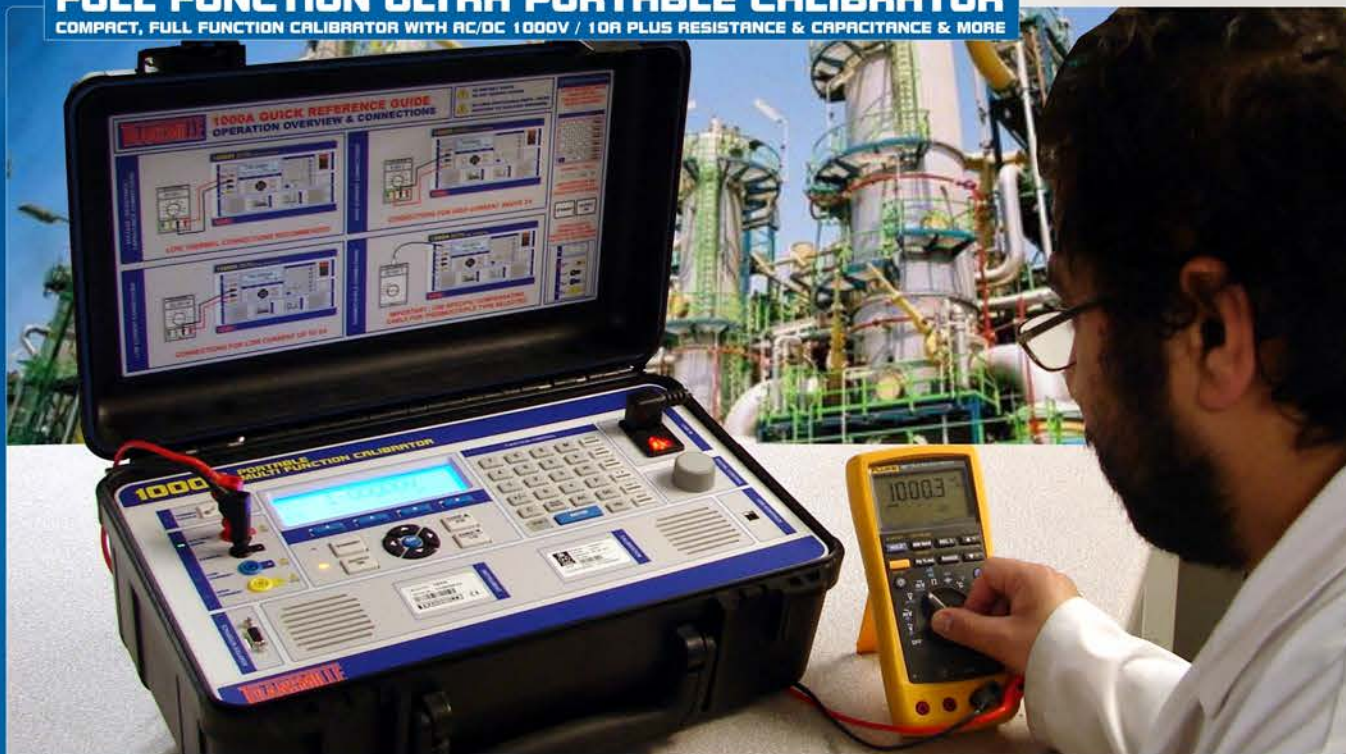

DIGITAL  
MULTIMETERS



POWER / CLAMP  
METERS



PROCESS  
METERS



CURRENT  
SHUNTS



DATA  
LOGGERS



PRESSURE  
(OPTION)

#### DESIGNED FOR A WIDE RANGE OF INDUSTRIES



LABORATORIES



MILITARY



PROCESS PLANTS



AEROSPACE



MARINE



OFF-SHORE



RAILWAYS



POWER STATIONS



TELECOMMUNICATIONS

## THE WORLDS FIRST ULTRA PORTABLE CALIBRATOR

### 1000 SERIES

**TRANSMILLE**  
SOLUTIONS IN CALIBRATION

The new 1000 Series is set to transform the world of calibration - the completely new design utilises the latest in cutting edge digital and analogue electronics, combined with the latest manufacturing techniques to create the worlds first ultra portable full function calibrator. Transmille have applied their expertise in designing bench and transportable calibrators to create this new generation of multi function calibrators to offer *true portability* and *rapid return on investment*.

For the first time the 1000 Series will allow you to easily take your calibration laboratory with you. The significant improvement in portability changes how and where calibration can be performed. On-site calibration is not a new idea, but older designs meant carrying large, heavy instruments. The 1000 Series is easy to carry, quick to set up anywhere and a fast warm up time allows work to be started quickly.

Although ultra portable and lightweight, the 1000 Series provides all the capabilities you would expect from a traditional full size calibrator. Full functionality and accuracy come as standard, with the 1000 Series offering the following comprehensive features :

- ✓ AC/DC Voltage to 1000V
- ✓ AC/DC Current to 10A (500A with coil)
- ✓ Resistance to 100 MOhms
- ✓ Capacitance
- ✓ Frequency
- ✓ Thermocouple Simulation
- ✓ PRT Simulation
- ✓ Pressure Measurement (via Transducers)
- ✓ Process Control Measurement (mV / mA)
- ✓ Insulation Tester Calibration

All these functions together with the high drive capabilities for calibrating older analogue instruments make the 1000 Series the perfect choice for on-site calibration. This full function ultra portable configuration makes it ideal for all types of sites including oil rigs, ships, aviation, power & process plants and railways.



#### KEY FEATURES AND FUNCTIONALITY

- ✓ MULTI FUNCTION CALIBRATOR DESIGNED TO CALIBRATE MULTIPLE INSTRUMENT TYPES WITH THE POWER TO DRIVE OLDER ANALOGUE INSTRUMENTS AND THE ACCURACY TO CALIBRATE MODERN DIGITAL INSTRUMENTS
- ✓ A DEDICATED RUGGED, ULTRA PORTABLE DESIGN IDEAL FOR ON-SITE USE. FAST WARM UP TIME
- ✓ WIDE WORKLOAD WITH FUNCTIONS TO COVER MANY TYPES OF TESTERS.
- ✓ FULL OUTPUT PROTECTION USING BUILT-IN **I-GUARD** SYSTEM
- ✓ OPTION TO CONFIGURE IN A BENCH TOP CASE FOR MAXIMUM FLEXIBILITY



ProCal is the genuinely easy to use calibration software which complements the 1000 Series calibrators to provide a complete laboratory solution.

Maximum calibration throughput is achieved with multi discipline support. ProCal-Track adds laboratory management control with dynamic job tracking from goods inwards to despatch - streamlines laboratory operation.



#### FLEXIBLE CONFIGURATION - PORTABLE OR BENCHTOP





# 1000 SERIES

## THE WORLD'S FIRST ULTRA PORTABLE CALIBRATOR

### ONE CALIBRATOR :: TWO CONFIGURATIONS

**TRANSMILLE**  
SOLUTIONS IN CALIBRATION

## 1000B BENCH CALIBRATOR

COMPACT BENCH ENCLOSURE - A REDUCED FOOTPRINT ALLOWS THE CALIBRATOR TO BE POSITIONED AT THE REAR OF A WORKBENCH OR WITHIN A RACK SYSTEM.

- 1 ADVANCED ADAPTER INTERFACE TO EXPAND FUNCTIONALITY INCLUDING mV, mA, PRESSURE MEASUREMENT AND MORE.
- 2 CLEAR LED INDICATION OF ACTIVE TERMINALS
- 3 DEDICATED THERMOCOUPLE OUTPUT SOCKET
- 4 GRAPHIC LCD DISPLAY INCORPORATING LED BACKLIGHT FOR CLEAR, BRIGHT PRESENTATION OF FUNCTIONS & SETTINGS
- 5 TACTILE SOFT-KEYS LINKED TO ON-SCREEN MENUS
- 6 EASY MANUAL ENTRY OF TEST VALUES USING NUMERIC KEYPAD
- 7 DIGITAL CONTROL FOR QUICK SELECTION OF RANGES & OUTPUTS
- 8 USB INTERFACE BUILT-IN AS STANDARD

☒ BUILT-IN INPUT PROTECTION




**I-GUARD**  
SYSTEM PREVENTS OUTPUT BEING SWITCHED ON WHEN VOLTAGE DETECTED ON TERMINALS

☒ ADVANCED ADAPTER INTERFACE



EXPAND WORKLOAD CAPABILITIES WITH ADD-ON ADAPTERS

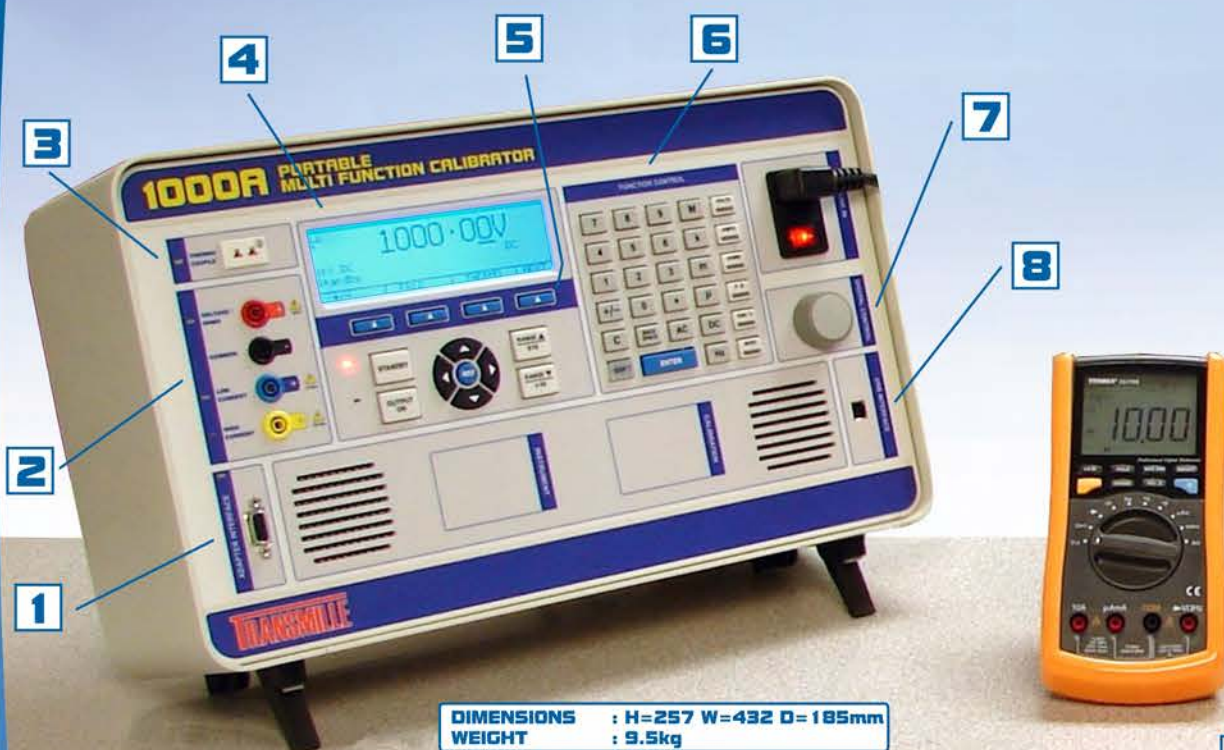

DIMENSIONS : H=257 W=432 D=185mm  
WEIGHT : 9.5kg

### ANALOGUE / MOVING IRON METER SUPPORT

The high current drive capability allows the 1000A Series to drive moving iron meters - ideal for many industrial applications where these analogue meters are commonly used in monitoring stations / control panels.



## 1000A PORTABLE CALIBRATOR

RUGGED IP67 RATED ENCLOSURE WITH BUILT-IN HANDLE INCORPORATING COMFORT INSERT AND HIGH PERFORMANCE LATCHING CATCHES.


- 6 EASY MANUAL ENTRY OF TEST VALUES USING NUMERIC KEYPAD
- 7 DIGITAL CONTROL FOR QUICK SELECTION OF RANGES & OUTPUTS
- 8 USB INTERFACE BUILT-IN AS STANDARD

☒ ELECTRONIC 'COVERS ON' CALIBRATION VIA REMOTE INTERFACE



ELIMINATES TEMPERATURE GRADIENTS FOR THE ULTIMATE IN STABILITY

☒ INCORPORATES THE LATEST IN HIGH PERFORMANCE PROCESSOR TECHNOLOGY



FOR ULTRA PRECISION & ADVANCED FUNCTIONALITY

☒ SMALL AND LIGHTWEIGHT CONFIGURATION - IDEAL FOR ON-SITE OR INDUSTRIAL ENVIRONMENTS



FOR THE ULTIMATE IN PORTABILITY



DIMENSIONS : H=180 W=447 D=297mm  
WEIGHT : 9.2kg  
CASE RATING : IP 67

### KEY FEATURES

- 80 PPM **80PPM ACCURACY**
- V **AC/DC VOLTAGE TO 1000V**
- A **AC/DC CURRENT UP TO 10A**
- $\Omega$  **2 WIRE RESISTANCE TO 100M $\Omega$**
- F **CAPACITANCE**
- Hz **FREQUENCY**
- TC **THERMOCOUPLE SIMULATION**
- PRT INS **PRT & INSULATION TEST FUNCTIONS**



## EA001A THERMOCOUPLE SIMULATION & MEASUREMENT ADAPTER

The 1000 Series provides thermocouple simulation via a front panel socket for basic temperature meters. For higher accuracy meters and thermocouples Transmile has designed an external source / measure adapter which keeps the electronics used for thermocouple simulation / measurement as close as possible to the connection of the UUT. Temperature gradients / thermal EMFs can be eliminated by using this external adapter, allowing the signal to be as free from electrical noise as possible, preventing errors caused by heat generated by surrounding electronics in the calibrator.

- ✓ Superior thermocouple simulation / measurement
- ✓ 11 Built-in Types
- ✓ Temperature Standard - EN60584-1 (1996) : Scale - ITS90
- ✓ Thermocouple measurement
- ✓ Uses neutral (copper) thermocouple plug - simulation / measurement of any thermocouple type without the need for compensation cables, avoiding introduction of errors.
- ✓ CJC sensor built into thermocouple plug - The ultimate in accurate CJC compensation - measures the temperature at the closest point to the cold junction.



### SPECIFICATIONS

| TYPE | RANGE            |
|------|------------------|
| J    | -210°C to 1200°C |
| K    | -200°C to 1370°C |
| T    | -250°C to 400    |
| R    | 0°C to 1760°C    |
| S    | 0°C to 1760°C    |
| B    | 600° to 1820°C   |
| N    | -200°C to 1300°C |
| E    | -250°C to 1000°C |
| L    | -200°C to 900°C  |
| U    | -200°C to 600°C  |
| C    | 0°C to 2316°C    |

See extended specifications for full details

### COLD JUNCTION COMPENSATION



CJC Sensor

Special care has been taken over the cold junction compensation - a common source of errors in thermocouple calibration. The cold junction compensation sensor is mounted in the thermocouple plug / socket itself. By measuring the cold junction at the instruments input allows any type of thermocouple to be simulated / measured without using compensation cables.

## EA002 2 / 10 / 50 TURN CLAMP COIL ADAPTER



Designed for the calibration of both wound AC & Magnetic field hall effect AC/DC clamp meters the Transmile current coil offers several unique features built in a robust construction, complete with alignment table for ease of use.



- ✓ Calibrates Clamp Meters up to 500A
- ✓ 2 / 10 / 50 Turn Coils
- ✓ High Accuracy AC/DC Balanced Design
- ✓ Wide range of clamp sizes covered
- ✓ Includes alignment table for repeatable readings

### INNOVATIVE CLOSED CONSTRUCTION DESIGN

Three coils in one provide the ability to calibrate a wide range, from small clamps down to 10mm jaw diameter, to larger current clamps. The low inductance, low resistance properties allow the calibrators to easily drive the coil, giving plenty of overhead for calibrating older clamps. The coils are fully enclosed in a strong, robust and compact plastic enclosure preventing mechanical damage. This rugged design is ideal for using the coil on-site and in harsh environments.

### SPECIFICATIONS

|                     |                                                   |
|---------------------|---------------------------------------------------|
| Configuration       | 2 Turn (LHS)<br>10 Turn (RHS)<br>50 Turn (Centre) |
| Type                | High Accuracy Balanced                            |
| Internal Dimensions | 10mm (2/10 Turn)<br>25mm 50 Turn                  |
| Maximum Current     | 40A                                               |
| Duty Cycle @ 20A    | 70% On / 30% Off                                  |
| Maximum RMS Voltage | 4V                                                |
| Frequency Range     | DC to 500Hz                                       |

See extended specifications for full details

## EA022 PROCESS CONTROL CALIBRATION ADAPTER

To provide support for calibration of process control instruments and transducers, the 1000 Series has a dedicated adapter designed to allow measurement of mV and mA signal sources allowing the 1000 Series to perform these measurement tasks without the need for a separate meter. A dedicated pressure module input on the rear of the adapter also allow pressure monitoring for transducer calibration.

- ✓ mV Measurement to 30V
- ✓ mA Measurement to 30mA
- ✓ 24V Loop Supply for Transducers
- ✓ Pressure Module input for pressure monitoring

### SPECIFICATIONS

| FUNCTION            | RANGE | ACCURACY        |
|---------------------|-------|-----------------|
| Voltage Measurement | 100mV | 0.02% ±2 DIGITS |
|                     | 1V    | 0.02% ±2 DIGITS |
|                     | 30V   | 0.02% ±2 DIGITS |
| Current Measurement | 30mA  | 0.03% ±2 DIGITS |

See extended specifications for full details



## INSULATION TESTER CALIBRATION FUNCTIONS



The Insulation test functions allow both Insulation and Installation tester functions to be calibrated. Adding yet another useful set of functions to the 1000 Series, the insulation tester calibration functions provide simulated insulation resistance and test voltage measurement capabilities to the 1000 Series.

Outputs are generated using accurate simulated techniques, meaning any resistance value within the output range of the 1000 Series can be selected.

- ✓ Insulation Resistance from 1MΩ to 1GΩ
- ✓ Select any resistance value within output range
- ✓ Test Voltage Measurement
- ✓ Accuracy 0.8%

## PRT TEMPERATURE SIMULATION

The PRT temperature simulation function makes the calibration of resistance thermometers easy. Simply connect in place of the probe and select a resistance value using the keypad or digital control. Compare the calibrator simulated value with the displayed value on the thermometer.

Additional modes are available using the PRT simulation function and can be selected using the on-screen PRT menu.

- ✓ 2-Wire simulation of probe
- ✓ Range -200° to 800°C
- ✓ Accuracy 0.3°C





## TPM INTELLIGENT PRESSURE MODULES



The 1000 Series supports pressure calibration using a range of pressure modules, which can connect directly to the 1000 Series or be used as part of a transducer verification system with the E022 adapter. These pressure modules cover the range from 25mBar to 10000 PSI with a 5 PSI differential and  $\pm 1$ Bar vacuum modules available.

- ✓ Pressure ranges from 25mBar to 10,000PSI • 5 PSI differential •  $\pm 1$ Bar vacuum
- ✓ Optional Hand pump available (-0.95Bar to 60Bar).
- ✓ Connects directly to Adapter Interface or EA022 Adapter
- ✓ Use direct from front panel or ProCal Software
- ✓ Supports multiple pressure units
- ✓ 1000 series automatically switches to pressure function on connection



## EA003 OPTICAL TACHOMETER CALIBRATION ADAPTER



Using a high intensity LED light source, optical tachometers can be calibrated quickly and easily. Simply enter the RPM value using the calibrator keypad or use with ProCal software for automated calibration.

- ✓ High intensity LED light source
- ✓ Direct keyboard input in RPM
- ✓ Range : 60 to 60,000 RPM

### SPECIFICATIONS

|              |                    |
|--------------|--------------------|
| Light source | High intensity LED |
| Range        | 60 to 60,000 RPM   |
| Duty Cycle   | 20% on / 80% off   |
| Accuracy     | 50ppm              |

See extended specifications for full details

## PROCAL : EASY TO USE SOFTWARE FOR CALIBRATION



GRAPHICAL CALIBRATION

Transmille ProCal software provides easy control of the 1000 Series with pre-set test points for each model of tester. The software takes care of setting the 1000 Series to the correct function and output - the user simply follows on-screen prompts and confirms measurements or enters readings from the tester.

ProCal software provides an easy to use package, with simple function select using drop down boxes and is focused on providing a complete solution for rapid on-site, workshop or laboratory testing, with an easy learning curve for new users ensuring rapid return on investment.



PROCEDURE WIZARDS

- ✓ UNIVERSAL CALIBRATION SOFTWARE
- ✓ AUTOMATIC CONTROL OF 1000 SERIES CALIBRATORS
- ✓ FAST PROCEDURE CREATION - PROCEDURE WIZARDS
- ✓ PRINT CERTIFICATES ON PLAIN PAPER
- ✓ M3003 / GUM UNCERTAINTIES
- ✓ SUPPORTS CRYSTAL REPORTS
- ✓ CALIBRATION PRICING

### BUILT IN SUPPORT FOR SCANNERS & PRINTERS



BARCODE SCANNING



LABEL PRINTING



DOCUMENT SCANNING

### PROCAL PROGRAM SUITE



SYSTEM SETUP



CERTIFICATE PRINTING



PROCEDURE MANAGEMENT



INSTRUMENT CALIBRATION

PROCAL

PROCAL

## CONDENSED SPECIFICATIONS<sup>1</sup>

| FUNCTION                      | RANGE                           | RESOLUTION | ACCURACY |
|-------------------------------|---------------------------------|------------|----------|
| DC Voltage                    | 0 to 1020V                      | 1uV        | 80ppm    |
| DC Current                    | 0 to 10A                        | 1nA        | 300ppm   |
| AC Voltage<br>Frequency Range | 0 to 1020V<br>10Hz to 20kHz     | 1uV        | 0.08%    |
| AC Current<br>Frequency Range | 0 to 10A<br>10Hz to 2kHz        | 1nA        | 0.1%     |
| Resistance (Simulated)        | 0Ω to 10MΩ                      | 1mΩ        | 0.02%    |
| Resistance (Passive Decades)  | 10Ω to 100MΩ                    | 100uΩ      | 0.02%    |
| Capacitance(Passive)          | 10nF to 1uF                     | 0.1pF      | 0.8%     |
| Insulation Resistance*        | 1MΩ to 1GΩ                      | 0.1MΩ      | 0.8%     |
| PRT Resistance*               | -200° to 800°C                  | 0.01°C     | 0.3°C    |
| Frequency                     | 10Hz to 100kHz                  | 1Hz        | 20ppm    |
| Thermocouple Simulation       | J, K, T, R, S, B, N, E, L, U, C | 0.01°C     | 0.22°C   |

\* Simulated Resistance

## EXTERNAL ADAPTERS : CONDENSED SPECIFICATIONS<sup>1</sup>

| FUNCTION                                         | RANGE                           | RESOLUTION           | ACCURACY                                                             |
|--------------------------------------------------|---------------------------------|----------------------|----------------------------------------------------------------------|
| EA001A Thermocouple Simulation / Measure Adapter |                                 |                      |                                                                      |
| Simulation & Measurement                         | J, K, T, R, S, B, N, E, L, U, C | 0.01°C               | 0.09°C                                                               |
| EA002 2/10/50 TURN CLAMP COIL ADAPTER            |                                 |                      |                                                                      |
| 2/10/50 Turn Clamp Coil                          | 3 Coils : 2 • 10 • 50 Turn      | -                    | 0.24%                                                                |
| EA003 Optical Tachometer Calibration Adapter     |                                 |                      |                                                                      |
| RPM                                              | 0 to 60,000 RPM                 | 1 RPM                | 50ppm                                                                |
| EA022 Process Control Calibration Adapter        |                                 |                      |                                                                      |
| Voltage Measurement                              | 100mV<br>1V<br>30V              | 1uV<br>10uV<br>100uV | 0.02% $\pm 2$ Digits<br>0.02% $\pm 2$ Digits<br>0.02% $\pm 2$ Digits |
| Current Measurement                              | 30mA                            | 1uA                  | 0.03% $\pm 2$ Digits                                                 |

## GENERAL SPECIFICATIONS

|              |                                                                    |
|--------------|--------------------------------------------------------------------|
| WARM UP TIME | Double the time since last powered up to 20minutes maximum.        |
| INTERFACE    | Built-In USB                                                       |
| LINE POWER   | 110V / 230V                                                        |
| DIMENSIONS   | 1000A : H 180 • W 447 • D 297mm<br>1000B : H 257 • W 432 • D 185mm |
| WEIGHT       | 1000A : 9.2kg<br>1000B : 9.5kg                                     |
| WARRANTY     | 1 Year                                                             |
| SAFETY       | Designed to EN61010-1:2001 : CE Marked                             |
| EMC          | EN55011:1998 • EN61326:1998                                        |

<sup>1</sup>Best 1 Year absolute uncertainties including calibration uncertainties  
Due to continuous development specifications are subject to change



## ORDERING GUIDE

|                 |                                                                       |
|-----------------|-----------------------------------------------------------------------|
| 1000A           | 80PPM PORTABLE MULTI FUNCTION CALIBRATOR (PORTABLE TRANSIT CASE)      |
| 1000B           | 80PPM COMPACT MULTI FUNCTION CALIBRATOR (BENCH TOP ENCLOSURE)         |
| 1000M           | 80PPM COMPACT MULTI FUNCTION CALIBRATOR (RACK MOUNT ENCLOSURE)        |
| CAL1000         | UKAS CALIBRATION CERTIFICATE                                          |
| OPTION EA001A   | EA001A THERMOCOUPLE SIMULATION AND MEASUREMENT ADAPTER                |
| OPTION EA002    | EA002 2/10/50 TURN CLAMP COIL ADAPTER                                 |
| OPTION EA003    | EA003 OPTICAL TACHOMETER CALIBRATION ADAPTER                          |
| OPTION EA022    | EA022 PROCESS CONTROL CALIBRATION ADAPTER                             |
| OPTION TPMxx    | TPM PRESSURE MODULES (SEE SEPARATE PRICE LIST FOR RANGES AND OPTIONS) |
| OPTION 1000LEAD | 1000 SERIES LEAD SET                                                  |
| OPTION PC-PACK  | PROCAL CALIBRATION SOFTWARE                                           |

## PRODUCT RANGE

### MULTI PRODUCT



**8/25/50ppm ACCURACY**

### TRANSPORTABLE



**25/50ppm ACCURACY**

### MULTIMETERS



**4/9ppm ACCURACY**

### ELECTRICAL TEST



**INSULATION • RCD • PAT • LOOP**

## TRANSMILLE :: THE CALIBRATION SPECIALISTS



Transmille has over a decades experience in calibration and instrumentation design & manufacture. Our products are in use throughout the world in both commercial and military laboratories, service centers and production facilities. Our reputation for innovation, reliability & value is second to none with complete solutions including instrumentation, software, support & training.



0324



UNIT 4 SELECT BUSINESS CENTRE,  
LODGE ROAD, STAPLEHURST, KENT.  
TN12 0QW. UNITED KINGDOM.  
TEL : +44 (0) 1580 890700  
FAX : +44 (0) 1580 890711  
EMAIL : [sales@transmille.com](mailto:sales@transmille.com)  
**WWW.TRANSMILLE.COM**

**europascal GmbH**  
An der Wiesenhecke 10  
DE - 63456 Hanau  
Tel.: +49 (0) 6181 / 42 309 - 0  
**[service@europascal.de](mailto:service@europascal.de)**  
**[www.europascal.de](http://www.europascal.de)**