

EASY OPEN LINE CRATES


EASY BOX CLIP

PERMANENT PLASTIC CONNECTORS
FOR RAPID, SECURE ASSEMBLY



An innovative plastic clip with a twist closure gives this reusable box extra stability. The system clips together in a flash to create a completely gap-free box, which can later be disassembled for compact storage.

These stackable OSB boxes feature permanent plastic connectors for fast and secure assembly – no tools required. The Easy Box Clip is custom-designed to match individual customer or product requirements, minimizing unused space during storage and transport. For added security, the ergonomically designed clip-together system includes a surrounding strap. Once the lid is removed, the contents are immediately accessible, and a seal on the joints provides a clear indication if the box has been opened.

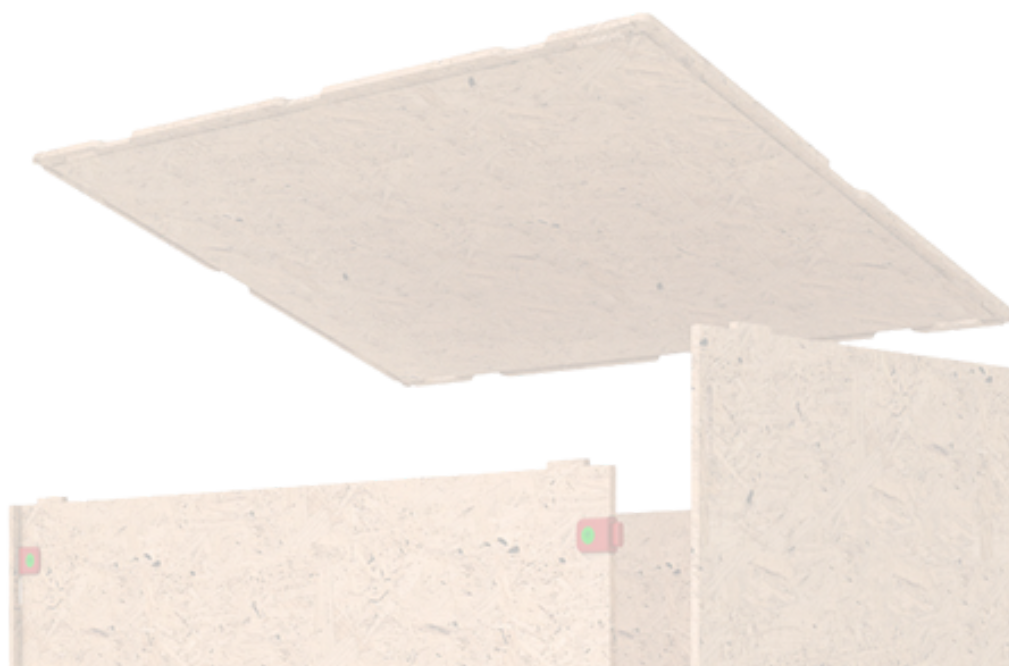

EASY BOX CLIP

Easy Box Clip		Easy Box Clip	Easy Box Clip+
Fastening system		Slot-together with plastic clip	Slot-together with plastic clip
Contents	Max. length	2320	2320
	Max. width	1070	1070
	Max. height	1120	1120
	Max. weight in kg	≤ 500	> 500
Maximum external container dimensions	Max. length	2500	2500
	Max. width	1250	1250
	Max. height	1250	1250
Material and material thickness – sides & lid	Material, sides	OSB	OSB
	Material thickness, sides	12	12
	Wooden brace, sides	–	Optional
	Additional security with screws	–	–
	Material lid	OSB	OSB
	Material thickness, lid	12	12
	Wooden brace, lid	–	–
	Lid fastening	Plastic or steel strap	Gaffer tape
	Additional security with screws	–	–
	Edge protection	–	Optional
Base	Design	Transverse skids	Transverse/longitudinal skids Pallet base
	Pallet base	–	Available from length 850 mm and width 800 mm
	Material	Plywood	Plywood
	Thickness (mm)	12	15
	Cross skids (mm)	60 × 100	100 × 100
	Longitudinal skids (mm)	–	100 × 60
	Top (mm)	–	100 × 100
	Steel cables	–	Optional
Markings and certifications	Fragile (glass symbol)	Standard	Standard
	Top (arrow symbol)	Standard	Standard
	Keep dry (umbrella symbol)	Standard	Standard
	ISPM 15	Standard	Standard
	Easy Open Line™ (Logo)	Standard	Standard
	Centre of gravity	Optional	Optional
	Do not roll	Optional	Optional
	Do not use forklift	Optional	Optional
	Attach here	Optional	Optional
	Weight limit for stacked load	–	Optional
	Stacking limit	–	Optional
	ISTA 3E load and stability test	Coming soon	Coming soon
Recommended minimum storage requirements	Outdoors	Possible, covered with Valeron film	Possible, covered with Valeron film
	Outdoors, covered	Yes	Yes
	Indoor warehouse	Yes	Yes
	Warehouse with climate control	Yes	Yes
Delivery time from order		48 hours	48 hours

Note: dimensions in mm; weight and load specifications in kg