

Magnum Optimum® 1208-960




2500.461 - 665 L	
Ext. (mm)	1200 x 800 x 958
Int. (mm)	1142 x 742 x 785
Weight (Kg)	52.0
Folded height (mm)	295 / 265
Unit load (Kg)	750*
Stack load (Kg)	3200
Dynamic load (Kg)	1600

2 skids, 2 feet / 2 drop doors.

* approved according to DIN EN 13 626.



99 full Magnum Optimum® in a mega trailer.

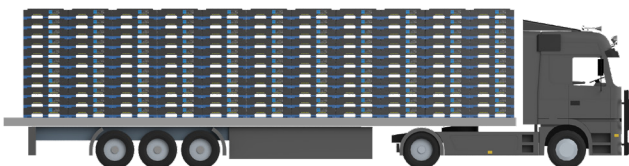


363 folded Magnum Optimum® in a mega trailer.

Accessories



2506.820 - Lid	
Ext. (mm)	1210 x 810 x 73
Weight (Kg)	5.2

Lid for Magnum Optimum® 1208 range.




2508.000 - Optiframe® (set of 2)	
Ext. (mm)	1200 x 800 x 105
Weight (Kg)	2.5

2 x 2508.000 are necessary to equip one Magnum Optimum® 1208.




4 Different base options


Ref. 2500.461
2 Doors
2 skids
2 feet version

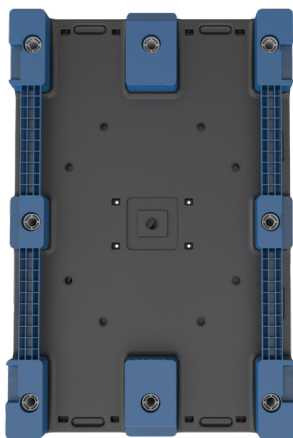


Ref. 2500.481
2 Doors
3 skids version

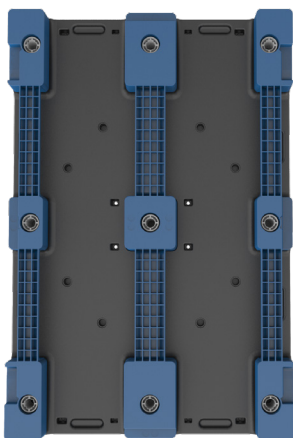

Ref. 2500.491
2 Doors
8 feet version

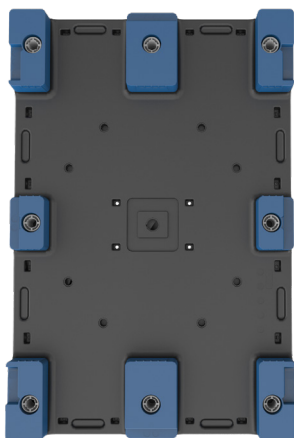

Ref. 2500.441
2 Doors
4 feet version

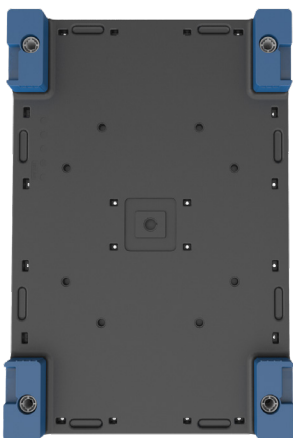

Schoeller Allibert
Innovating your logistics for a better world



Please visit our website
www.schoellerallibert.com

360°

Schoeller Allibert Returnable Plastic Packaging Solutions



Magnum Optimum® 1208



Schoeller Allibert
Innovating your logistics for a better world

In line with its policy of continuous development, Schoeller Allibert reserves the right to amend product specifications described in this catalogue without prior notice. Most of products are protected by patent, registered design or copyright. Texts, characteristics, pictures and plans are not contractual. Design and production by MAGINA – Creation 09/2018.

Magnum Optimum® 1208: The New Dimension for Industrial Logistics

Maximised truck payload and profitability

Lightweight (7% lighter than the previous generation) and offering 12% more volume thanks to the double wall structure, the Magnum Optimum® 1208 significantly increases truck payload any folding metal or plastic containers: less trucks are needed, fuel consumption and carbon footprint are reduced.




A new footprint for the most efficient reverse logistics

With the highest folding ratio on the market : 71% the new 1200 x 800 Magnum Optimum® stacks folded up to 9 in a standard truck and 11 in a mega trailer. Reverse logistics costs are minimised by 36% and storage space of empties by 30% compared to the previous generation of FLC.




Ergonomics and handling efficiency



Non sequential folding and easy to use locking devices inside the panels allow one operator on one side to erect and fold the Magnum Optimum® 1208.



New unique push self-lock door for improved ergonomics and maximum labour savings. Deep opening on one side and one end in standard version for versatile and easy loading and unloading.




Secured loads thanks to strap locations and pins in the base angles.

Smooth and easy to clean



Smooth internal and external surfaces allow fast and easy cleansing, avoid water retention and protect content from damages.

The lid (in option) increases protection and prevents contamination of content.

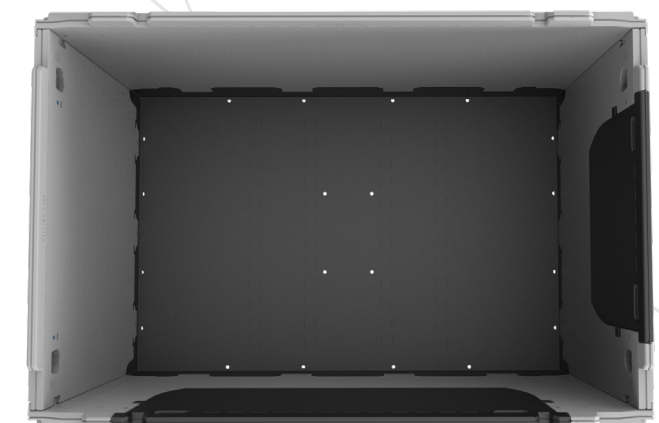

Versatile modular system

The Optiframe® spacer allows increasing usable height by 105 mm step adapting volume to the type of content. For the Automotive industry logistics, dunnages, plastic or textile, fit inside the folded Magnum Optimum® 1208 for an efficient empties return.

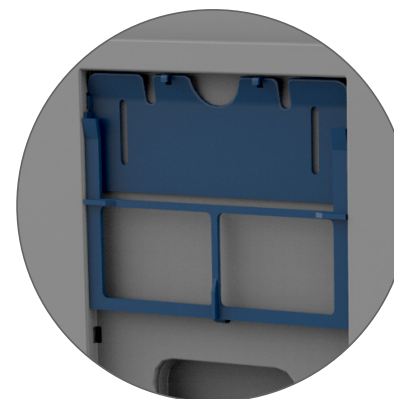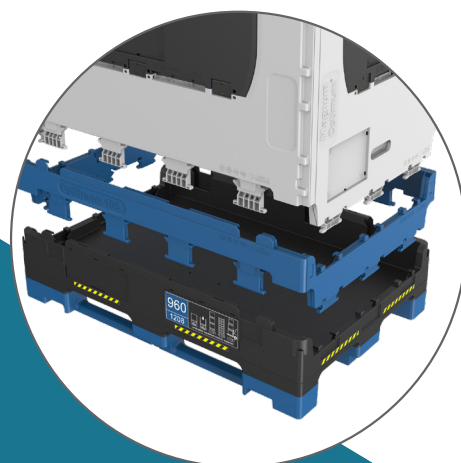

Multiple identification options

Integrated A5 label holders on one end and one side, bar code label recessed zones, large marking plates on four walls, RFID and IOT ready, Magnum Optimum® 1208 options are multiple for maximised flexibility.