




Cojinetes deslizantes *CATALOGO TECNICO*
Sliding bearings *TECHNICAL CATALOG*



BRL BEARINGS

Calle Química, 40
08450 LLINARS DEL VALLÈS (BARCELONA)
Tel. 93 754 16 74
www.brlbearings.com

CARACTERISTICAS CHARACTERISTICS

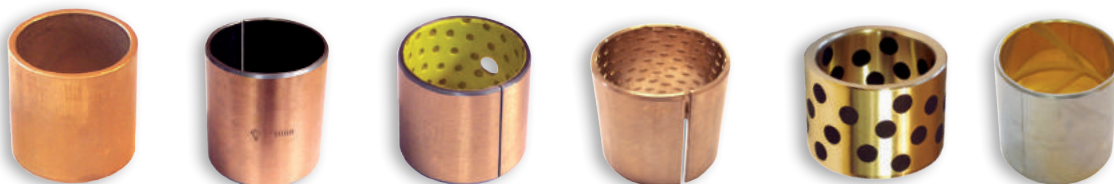

	BRONCE SINTERIZADO SINTERED BRONZE	AUTOLUBRICANTE EN PTFE SELF LUBRICATING PTFE	RELUBRICABLE EN POM/PEEK RELUBRICATING POM/PEEK	BRONCE ALVEOLAR RULLED BRONZE	BRONCE GRAFITO CAST BRONZE/ GRAPHITE	BIMETALICO BIMETAL
	BZ..	PT..SL	PT .. RK	PB .. AR/AC	BG .. A /B /C	BJ..
AUTOLUBRICANTE SELF-LUBRICATING	• •	• • •	• •	-	• • •	-
EXENTA DE MANUTENCION MAINTENANCE-FREE	• •	• • •	• •	•	• • •	•
CARGA ELEVADA HIGH LOAD	-	• •	• • •	•	• • •	•
ALTA VELOCIDAD HIGH SPEED	• • •	• •	• •	•	•	•
BAJA FRICCION LOW FRICTION	• •	• • •	• • •	-	• •	-
ALTA TEMPERATURA HIGH TEMPERATURE	-	• •	•	• •	• • •	• •
ENTORNO SUCIO DIRTY ENVIRONMENT	•	-	•	• • •	• •	• • •
RESISTENCIA A LA CORROSION CORROSION RESISTANCE	•	•	•	• •	• •	•
TOLERA DESALINEAMIENTO MISALIGNMENT	•	-	•	•	• •	•
FUNCIONAMIENTO JUEGO EDUCIDO REDUCED CLEARANCE	•	• • •	• •	•	• • •	•
MAL ACABADO SUPERFICIE APOYO LOW FINISHING OF MATING SURFACE	-	-	•	•	-	•
RESPUESTA VIBRACIÓN Y CHOQUE VIBRATION AND SHOCK	•	•	•	• •	• • •	• •

LEYENDA LEGEND

- • OPTIMO
- BUENO
- ACCEPTABLE - INADECUADO
- • VERY WELL
- GOOD
- SUITABLE - UNSUITABLE