

LiFePO₄ Smart Battery

12,8V 100Ah **DIN**

Bluetooth™

HEATING
MODULE



VOLTUM
ENERGY

VE-SPBT-12100DIN

VOLTUMENERGY.COM



BATTERY FEATURES

- ✓ Long lasting superpower, LiFePO₄ has up to 10 times more cycles than comparable lead acid batteries
- ✓ Lithium Iron Phosphate is the safest lithium technology on the market
- ✓ The intelligent Battery Management System (BMS) controls and balance the battery cells, protects the battery against over-charging, over-discharging and has temperature protection
- ✓ Double, triple or even quadruple the capacity or voltage through parallel or serial pairing
- ✓ Low self-discharge and the ability to charge quickly and efficiently
- ✓ Twice the usable capacity (100% DOD) than comparable lead acid batteries
- ✓ The battery can be mounted in any position and weighs only 40% of the weight of a comparable lead acid battery
- ✓ With our smart Bluetooth® app you can easily view and monitor all relevant data of your LiFePO₄ battery
- ✓ The Battery has a pre-charge function which means the battery can handle high incoming currents from inverters. Thanks to this feature, the BMS and cells will not be damaged.

APPLICATIONS



ENERGY STORAGE



RECREATION & SPORT



FISHING




MARINE



TRANSPORT



MOBILITY



EVENTS



MEDICAL



INDUSTRIAL



DATA CENTER

CERTIFICATES

- ✓ CE certificate
- ✓ UL 1642 cell certificate
- ✓ IEC 62133 cell certificate
- ✓ UN 38.3 certified
- ✓ ISO9001:2015 - Quality management systems



Bluetooth™

**DOWNLOAD THE APP
OF VOLTUM ENERGY**

With our Bluetooth® app, you can view and monitor the current status of your LiFePO₄ battery!



LiFePO₄ Smart Battery

12,8V 100Ah **DIN**



VOLTUM
ENERGY

VE-SPBT-12100DIN

BATTERY SPECIFICATIONS

GENERAL SPECIFICATIONS

Nominal Voltage	12,8V (4S)
Rated Capacity (CC 0.2C to 10V)	100Ah
Nominal Energy	1280Wh
Internal Resistance	≤30mΩ
Terminal type / Torque	M8 / 10 Nm
Cycle Life (@DOD 100% at 1C and ±25°C)	>3000
Cycle Life (@DOD 100% at 0.2C and ±25°C)	6000
Connection options	4 in series OR 4 in parallel
Communication	Bluetooth®

MECHANICAL CHARACTERISTICS

Dimension	Length 350±2mm
	Width 176±2mm
	Height 188±2mm
Weight	Approx. 11.5Kg
Housing material	ABS

STORAGE SPECIFICATIONS


Storage Temperature	0-25°C
Self-discharge rate	≤3% per month
Recommended storage SOC	50-70% SOC
Storage condition	See manual

CHARGE SPECIFICATIONS


Battery operation temperature range @charging	0~45°C
Normal charge voltage	14.6 ±0.1V
Recommended float charge voltage (for Standby use)	13.8 ±0.1V
Max charge current	100A at ±25°C
Recommended charge current	0.2C
Charge Cut-off Voltage	15V ±0.2V

DISCHARGE SPECIFICATIONS

Discharging temperature range	-20~60°C
Output Voltage Range	10.0~14.6V
Max discharge current	100A at ±25°C
Recommended discharge current	0.2C
Pulse discharge current	800A withstand 3s
Discharge Cut-off voltage	10.0V
Discharge temperature characteristics	-20°C / 70% capacity
	0°C / 90% capacity
	25°C / 100% capacity
	60°C / 102% capacity



DIMENSIONS

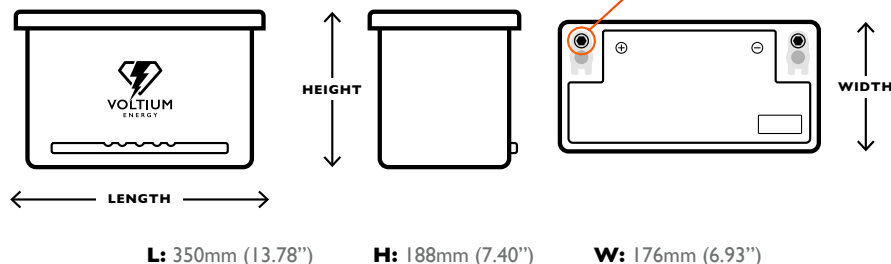

©2024.Voltium Energy. All rights reserved. All trademarks are the property of their respective owners. All data subject to change without notice. E&O.E

To ensure safe and efficient operation always refer to the latest edition of our Technical Datasheet, as published on our website.

VOLTUMENERGY.COM



BMS TECHNICAL SPECIFICATIONS

OVER CHARGE

Over-charge protection for each cell (delay time)	3.75V ±0.05V (2s)
Over-charge release for each cell (delay time)	3.6V ±0.05V (2s)
Over-charge release method	When voltage is under release voltage

OVER DISCHARGE

Over-discharge protection for each cell (delay time)	2.5V ±0.05V (2s)
Over-discharge release for each cell (delay time)	2.8V ±0.05V (2s)
Over-discharge release method	Charging recover

OVER CURRENT CHARGE

Charge over-current protection (delay time)	1st protection / 110A ±5A (10s) 2nd protection / 150A ±5A (3s)
Over-current release method (delay time)	Discharge or auto release (60s)

OVER CURRENT DISCHARGE

Discharge over-current protection (delay time)	360A ±60A (3s)
Over-current release method (delay time)	Charge or auto release (60s)

BATTERY TEMPERATURE CHARGING

Temperature protection	Over / 60°C ±5°C (2s) Low / 0°C ±2°C (2s)
Release temperature	Over / 45°C ±2°C (2s) Low / 2°C ±2°C (2s)
Release method (delay time)	When temperature is on release

BATTERY TEMPERATURE DISCHARGING

Over-temperature protection Battery	Over / 65°C ±5°C (2s) Low / -20°C ±2°C (2s)
Release temperature Battery	Over / 55°C ±5°C (2s) Low / -18°C ±2°C (2s)
Over-temperature protection Circuit	Over / 85°C ±5°C (2s)
Release temperature Circuit	Over / 70°C ±5°C (2s)
Release method (delay time)	When temperature is on release

SHORT CIRCUIT PROTECTION

Function condition	External short circuit
Short circuit delay time	250-500 ms
Release method (delay time)	Remove load for the short circuit protection to release (30s)