


*clever – creative – sustainable – smart*

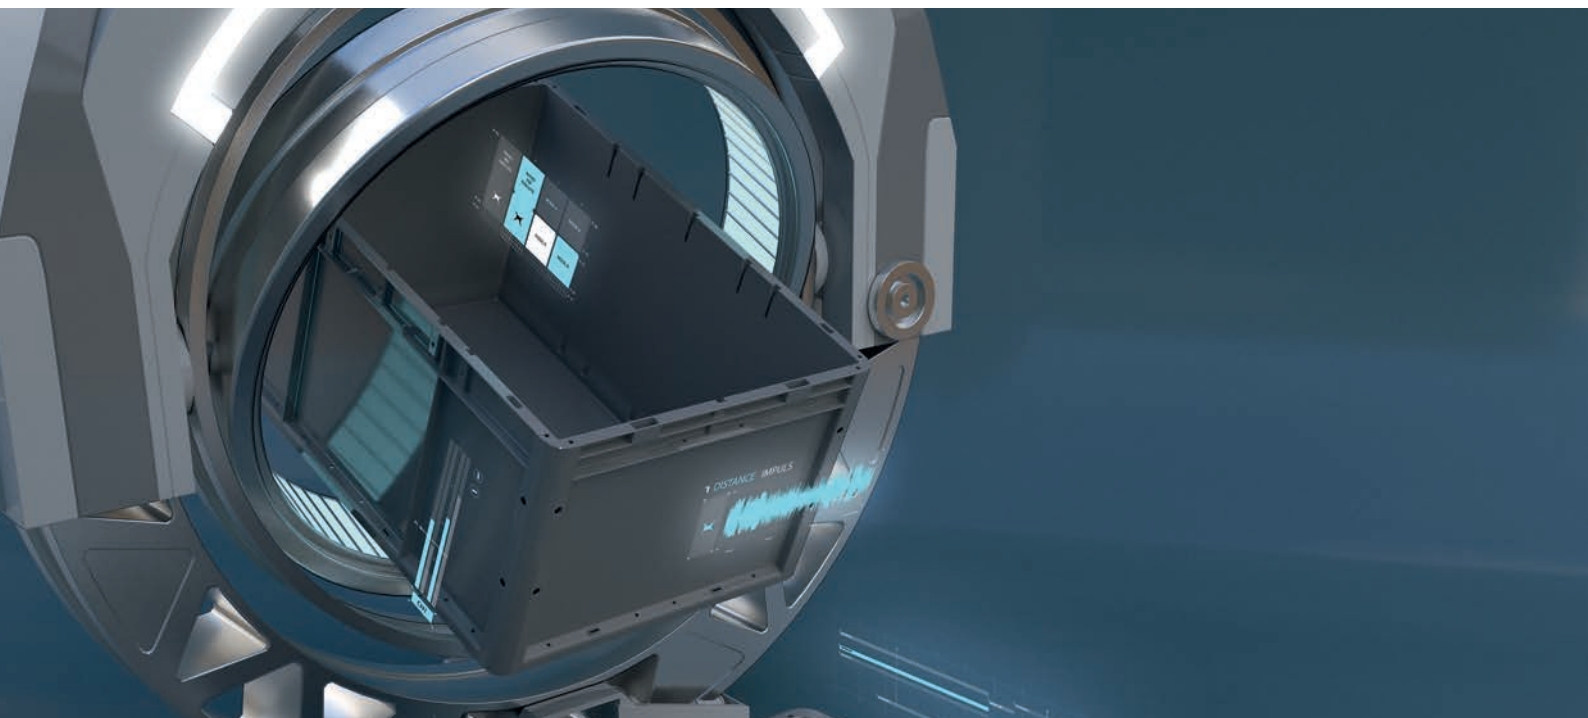

**utz** EUROTEC

[utzgroup.com](http://utzgroup.com)

## High-tech containers for automatic handling




### Conveyed automatically

The EUROTEC is predominantly suitable for automatic handling on all conventional storage and conveyor systems. It has a large number of points for robots to grab on to or where an automatic conveyor system can be positioned. Recessed grips and handle holes also permit manual container handling.

### EUROTEC features

- **A variety of basic dimensions:**  
300 × 200 mm, 400 × 300 mm, 600 × 400 mm, 650 × 450 mm with heights between 80 and 420 mm
- **A large selection of base variants:**  
According to the required container load
- **Adapted to the latest conveyor technology:**  
Horizontal/vertical pick-up and bottom pull groove
- **Individual labelling is possible:**  
e.g. hot stamping, mould inserts and barcode labels  
barcode labels



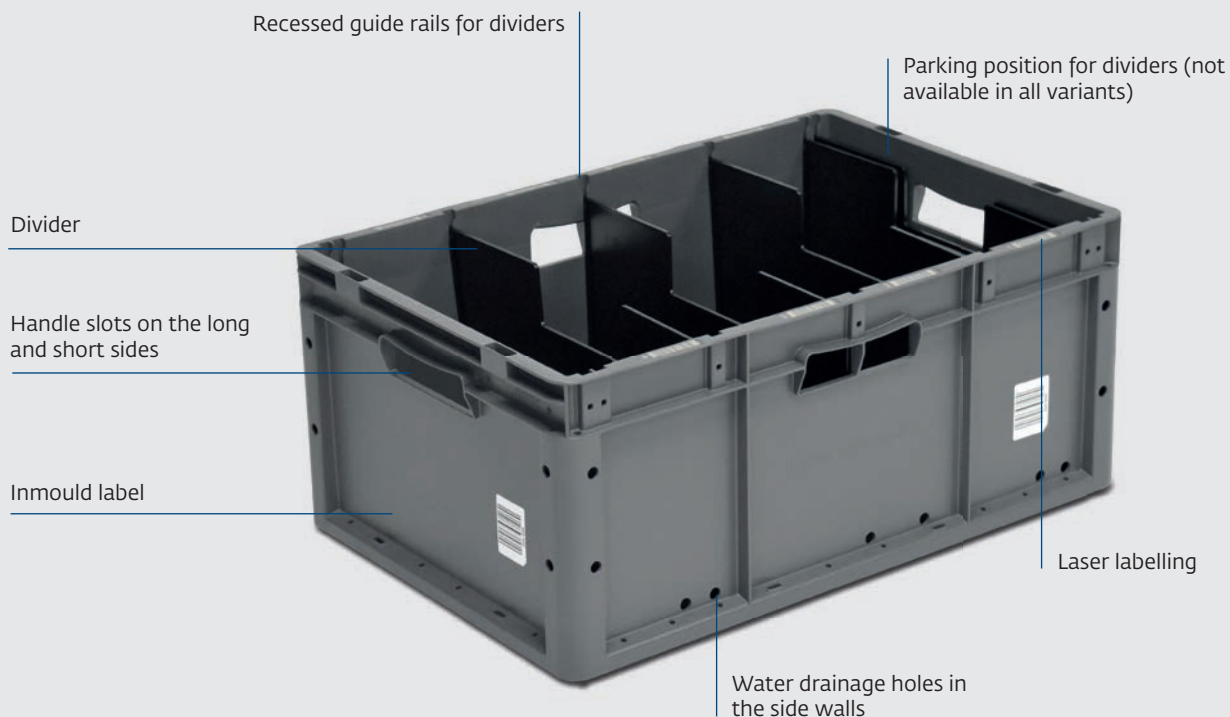


## Programmed precision

The number of interfaces at which robots can operate makes EUROTEC an indispensable container for automated handling.



### Vertical take-up

- Opening in the upper container rim.
- This enables a conveyor device to lift the container.



### Lower pulling channel

- Opening in the lower rim of the short sides.
- Interface for the automatic conveyor system to pull or push the container.



### Grip sleeve

- Vertical indentation in close proximity to the corner area.
- Interface for the grip sleeves to pull or push the container.



### Divider safety catch

- Recessed guides make it easier to insert the divider panels.
- Grid point for stabilising the divider plates on the container base.



### Double-walled corner sections

- Guarantee maximum stability.
- Optimum gripping options thanks to large, flat and stable surfaces.
- Ideal water drainage after the washing process.




### Inmould label


- Can be positioned individually.
- Form a firm bond with the container and therefore hold much better.

## EUROTEC Versions: base variants


### Bases for high surface loading

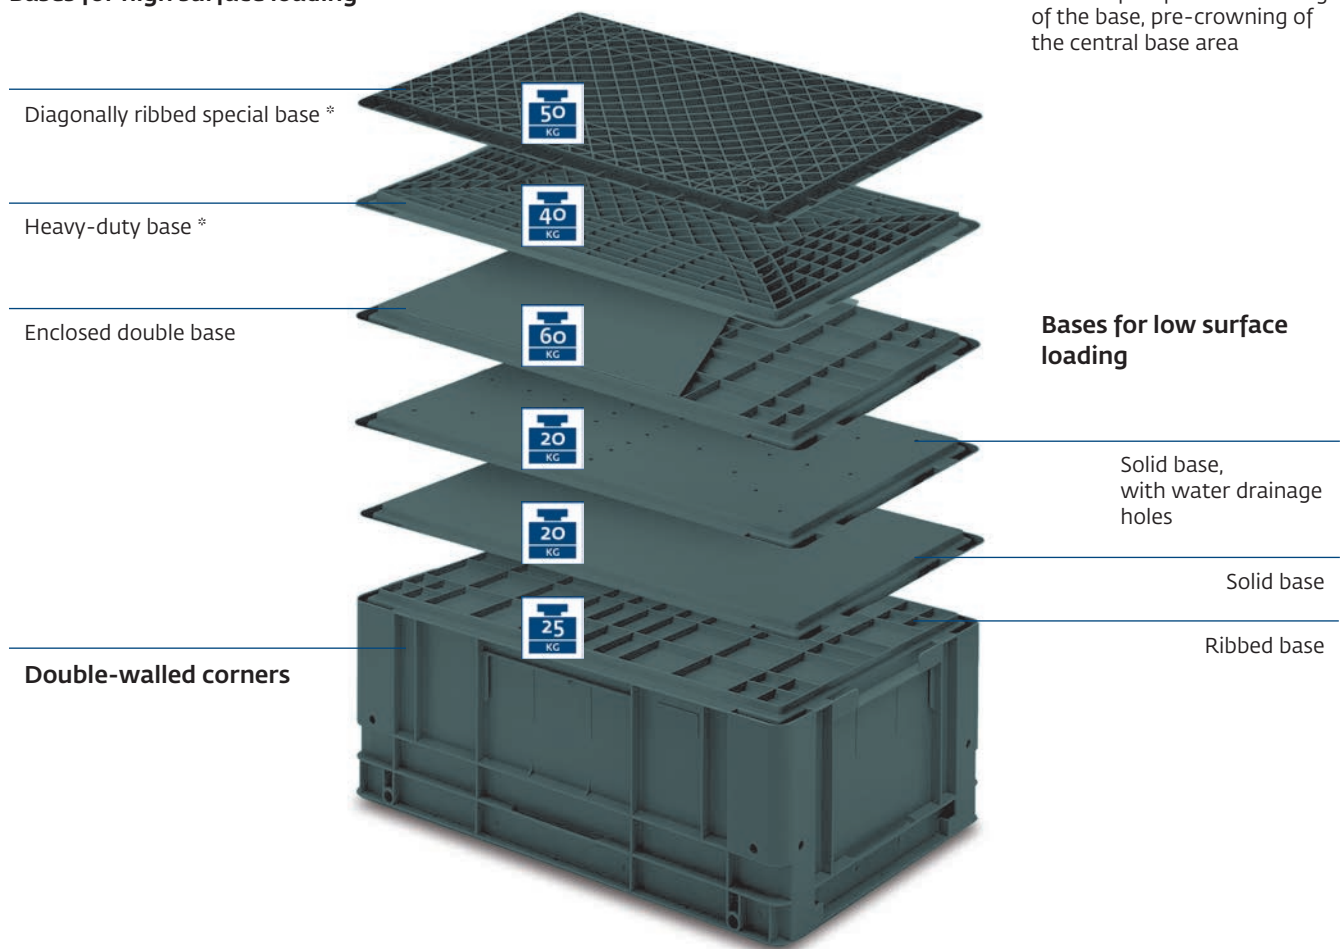


### Solid base

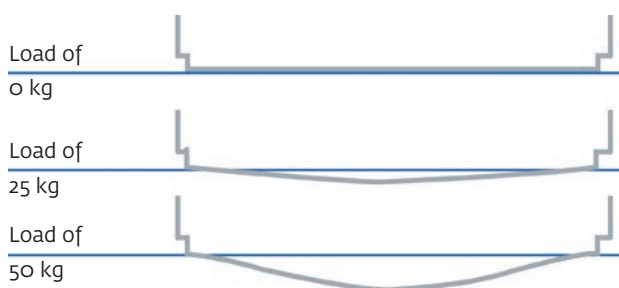

### Enclosed double base

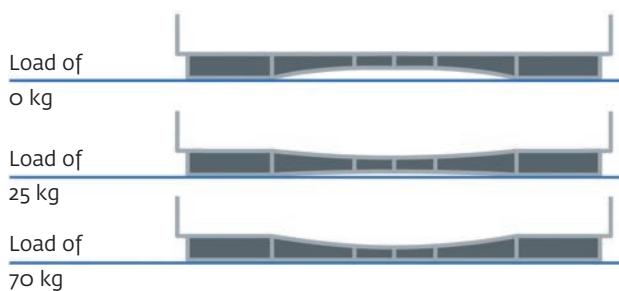

### Heavy-duty base

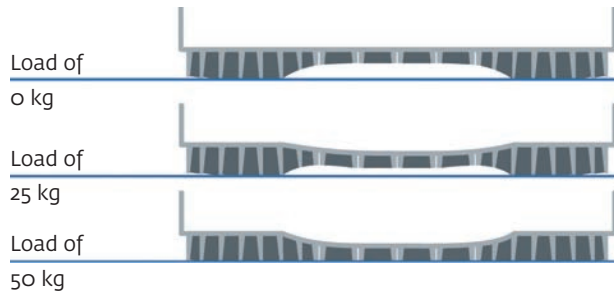

# Identification and customised extras



## Identification

- Barcode(frames)
- Transponder/RFID-Chips
- Inmould label

Can be positioned individually

## Label pockets

- With borders on 2 or 3 sides
- For welding on or gluing on

## Adhesive label area

- On request

## Individual marking

- Hot stamping
- Pad printing
- Thermotransfer printing
- Lasering
- Script inserts
- Inmould label
- Foil embossing

For individual models a template is required

Base dimension **195 x 145 mm**Height **120 mm**

| Internal dimensions base        | 157 x 107 x 118 mm |       |            |
|---------------------------------|--------------------|-------|------------|
| Stacking height                 | 108 mm             |       |            |
| Usable internal height in stack | 106 mm             |       |            |
| Volume                          | 2.0 litres         |       |            |
| Weight                          | 0.20 kg            |       |            |
| Article code                    | U-channel          | Base  | Handles    |
| 5-2112-11                       | none               | solid | handle bar |

Base dimension **300 x 200 mm**Standard colour  
iron greyHeight **120 mm**

| Internal dimensions base        | 259 x 159 x 118 mm |       |            |
|---------------------------------|--------------------|-------|------------|
| Stacking height                 | 108 mm             |       |            |
| Usable internal height in stack | 106 mm             |       |            |
| Volume                          | 4.0 litres         |       |            |
| Weight                          | 0.39 kg            |       |            |
| Article code                    | U-channel          | Base  | Handles    |
| 5-3212-11 R                     | none               | solid | handle bar |
| 5-3212-11                       | none               | solid | handle bar |

Base dimension **400 x 300 mm**Height **80 mm**

| Internal dimensions base        | 354 x 254 x 77 mm |       |                 |
|---------------------------------|-------------------|-------|-----------------|
| Stacking height                 | 65 mm             |       |                 |
| Usable internal height in stack | 63 mm             |       |                 |
| Volume                          | 7.0 litres        |       |                 |
| Weight                          | 0.75 kg           |       |                 |
| Article code                    | U-channel         | Base  | Handles         |
| 5-4308-0                        | none              | solid | 2 shell handles |

Standard colour  
iron greyHeight **120 mm**

| Internal dimensions base        | 365 x 265 x 105 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 108 mm             |        |                 |
| Usable internal height in stack | 93 mm              |        |                 |
| Volume                          | 10.0 litres        |        |                 |
| Weight                          | 0.90 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 5-4312-3 R                      | none               | ribbed | 4 shell handles |
| 5-4312-3                        | none               | ribbed | 4 shell handles |

**Container with reinforced base**

| Weight       | 1.10 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-4312-3-V   | none      | enclosed double base | 4 shell handles |

Article code with **R** =  
made of recycled materialStock items (SKU), for all other items please  
request the minimum order quantities.

Base dimension **400 x 300 mm**Standard colour  
iron greyHeight **170 mm**

| Internal dimensions base        | 365 x 265 x 155 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 158 mm             |        |                 |
| Usable internal height in stack | 143 mm             |        |                 |
| Volume                          | 15.0 litres        |        |                 |
| Weight                          | 1.15 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 5-4317-1                        | closed             | ribbed | 2 handle slots  |
| 5-4317-2                        | open               | ribbed | 4 shell handles |
| <b>5-4317-3 R</b>               | closed             | ribbed | 4 shell handles |
| 5-4317-3                        | closed             | ribbed | 4 shell handles |
| 5-4317-4                        | open               | ribbed | 2 handle slots  |

**Containers with reinforced base**

| Weight       | 1.39 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-4317-1-V   | closed    | enclosed double base | 2 handle slots  |
| 5-4317-2-V   | open      | enclosed double base | 4 shell handles |
| 5-4317-3-V   | closed    | enclosed double base | 4 shell handles |
| 5-4317-4-V   | open      | enclosed double base | 2 handle slots  |
| 5-4317-20    | closed    | heavy-duty b. 17 mm  | 4 shell handles |
| 5-4317-21    | closed    | heavy-duty b. 17 mm  | 2 handle slots  |
| 5-4317-22    | open      | heavy-duty b. 17 mm  | 4 shell handles |
| 5-4317-24    | open      | heavy-duty b. 17 mm  | 2 handle slots  |

Standard colour  
iron greyHeight **220 mm**

| Internal dimensions base        | 365 x 265 x 205 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 208 mm             |        |                 |
| Usable internal height in stack | 193 mm             |        |                 |
| Volume                          | 20.0 litres        |        |                 |
| Weight                          | 1.33 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 5-4322N-1                       | closed             | ribbed | 2 handle slots  |
| 5-4322N-2                       | open               | ribbed | 4 shell handles |
| <b>5-4322N-3 R</b>              | closed             | ribbed | 4 shell handles |
| 5-4322N-3                       | closed             | ribbed | 4 shell handles |
| 5-4322N-4                       | open               | ribbed | 2 handle slots  |
| 5-4322N-303                     | closed             | solid  | 4 shell handles |

**Containers with reinforced base**

| Weight       | 1.58 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-4322N-1-V  | closed    | enclosed double base | 2 handle slots  |
| 5-4322N-2-V  | open      | enclosed double base | 4 shell handles |
| 5-4322N-3-V  | closed    | enclosed double base | 4 shell handles |
| 5-4322N-4-V  | open      | enclosed double base | 2 handle slots  |
| 5-4322N-20   | closed    | heavy-duty b. 17 mm  | 4 shell handles |
| 5-4322N-21   | closed    | heavy-duty b. 17 mm  | 2 handle slots  |
| 5-4322N-22   | open      | heavy-duty b. 17 mm  | 4 shell handles |
| 5-4322N-24   | open      | heavy-duty b. 17 mm  | 2 handle slots  |

Article code with **R** =  
made of recycled materialStock items (SKU), for all other items please  
request the minimum order quantities.

Base dimension **400 x 300 mm**Height **220 mm**

| Internal dimensions base        | 365 x 265 x 205 mm |       |               |
|---------------------------------|--------------------|-------|---------------|
| Stacking height                 | 208 mm             |       |               |
| Usable internal height in stack | 193 mm             |       |               |
| Volume                          | 20.0 litres        |       |               |
| Weight                          | 1.24 kg            |       |               |
| Access opening                  | 110 x 200 mm       |       |               |
| Article code                    | U-channel          | Base  | Handles       |
| 5-4322N-590                     | closed             | solid | 1 handle slot |

Base dimension **600 x 400 mm**Height **80 mm**

| Internal dimensions base        | 565 x 365 x 66 mm |        |                 |
|---------------------------------|-------------------|--------|-----------------|
| Stacking height                 | 69 mm             |        |                 |
| Usable internal height in stack | 55 mm             |        |                 |
| Volume                          | 14.0 litres       |        |                 |
| Weight                          | 1.26 kg           |        |                 |
| Article code                    | U-channel         | Base   | Handles         |
| 5-6408-524                      | none              | ribbed | 4 shell handles |

## Container with reinforced base

| Weight       | 1.59 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-6408-524-V | none      | enclosed double base | 4 shell handles |



Standard colour  
iron grey

Height **120 mm**

| Internal dimensions base        | 565 x 365 x 105 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 108 mm             |        |                 |
| Usable internal height in stack | 93 mm              |        |                 |
| Volume                          | 21.0 litres        |        |                 |
| Weight                          | 1.60 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 5-6412N-3 R                     | none               | ribbed | 4 shell handles |
| 5-6412N-3                       | none               | ribbed | 4 shell handles |

## Containers with reinforced base

| Weight       | 1.95 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-6412N-3-V  | none      | enclosed double base | 4 shell handles |
| 5-6412N-20   | none      | heavy-duty b. 17 mm  | 4 shell handles |



Article code with **R** =  
made of recycled material

Stock items (SKU), for all other items please  
request the minimum order quantities.

Base dimension **600 x 400 mm****Height 120 mm**

| Internal dimensions base        | 566 x 366 x 105 mm             |                                         |                 |
|---------------------------------|--------------------------------|-----------------------------------------|-----------------|
| Stacking height                 | 108 mm                         |                                         |                 |
| Usable internal height in stack | 93 mm                          |                                         |                 |
| Volume                          | 18.0 litres                    |                                         |                 |
| Weight                          | 1.80 kg                        |                                         |                 |
| Special version                 | 1 short side with sliding wall |                                         |                 |
| Article code                    | U-channel                      | Base                                    | Handles         |
| 5-6412-650                      | none                           | enclosed double base, water drain holes | 2 shell handles |

**Height 120 mm**

| Internal dimensions base        | 568 x 368 x 104 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 107 mm             |        |                 |
| Usable internal height in stack | 89 mm              |        |                 |
| Volume                          | 22.0 litres        |        |                 |
| Weight                          | 1.30 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 15-6412-0                       | none               | ribbed | 2 shell handles |
| 15-6412-25                      | none               | ribbed | 2 handle slots  |

**Container with reinforced base**

| Weight       | 1.7 kg    |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 15-6412-3-V  | none      | enclosed double base | 2 shell handles |

**Height 150 mm**

| Internal dimensions base        | 565 x 365 x 127 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 136 mm             |        |                 |
| Usable internal height in stack | 113 mm             |        |                 |
| Volume                          | 26.0 litres        |        |                 |
| Weight                          | 1.50 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 15-6415-0                       | none               | ribbed | 2 shell handles |
| 15-6415-25                      | none               | ribbed | 2 handle slots  |

**Container with reinforced base**

| Weight       | 2.08 kg   |                     |                 |
|--------------|-----------|---------------------|-----------------|
| Article code | U-channel | Base                | Handles         |
| 15-6415-150  | none      | heavy-duty b. 20 mm | 2 shell handles |

Base dimension **600 x 400 mm**Standard colour  
iron grey**Height 170 mm**

| <b>Internal dimensions base</b>        |           | 565 x 365 x 155 mm |                 |
|----------------------------------------|-----------|--------------------|-----------------|
| <b>Stacking height</b>                 |           | 158 mm             |                 |
| <b>Usable internal height in stack</b> |           | 143 mm             |                 |
| <b>Volume</b>                          |           | 32.0 litres        |                 |
| <b>Weight</b>                          |           | 1.76 kg            |                 |
| Article code                           | U-channel | Base               | Handles         |
| 5-6417N-1                              | closed    | ribbed             | 2 handle slots  |
| 5-6417N-2                              | open      | ribbed             | 4 shell handles |
| <b>5-6417N-3 R</b>                     | closed    | ribbed             | 4 shell handles |
| 5-6417N-3                              | closed    | ribbed             | 4 shell handles |
| 5-6417N-4                              | open      | ribbed             | 2 handle slots  |
| 5-6417-303                             | closed    | solid              | 4 shell handles |

**Containers with reinforced base**

| <b>Weight</b> |           | 2.14 kg              |                 |
|---------------|-----------|----------------------|-----------------|
| Article code  | U-channel | Base                 | Handles         |
| 5-6417N-1-V   | closed    | enclosed double base | 2 handle slots  |
| 5-6417N-2-V   | open      | enclosed double base | 4 shell handles |
| 5-6417N-3-V   | closed    | enclosed double base | 4 shell handles |
| 5-6417N-4-V   | open      | enclosed double base | 2 handle slots  |
| 5-6417N-80    | closed    | heavy-duty b. 20 mm  | 4 shell handles |
| 5-6417N-81    | closed    | heavy-duty b. 20 mm  | 2 handle slots  |
| 5-6417N-82    | open      | heavy-duty b. 20 mm  | 4 shell handles |
| 5-6417N-84    | open      | heavy-duty b. 20 mm  | 2 handle slots  |

**Height 200 mm**

| <b>Innenmasse oben</b>                 |           | 566 x 366 mm       |                 |
|----------------------------------------|-----------|--------------------|-----------------|
| <b>Internal dimensions base</b>        |           | 565 x 365 x 183 mm |                 |
| <b>Stacking height</b>                 |           | 186 mm             |                 |
| <b>Usable internal height in stack</b> |           | 169 mm             |                 |
| <b>Volume</b>                          |           | 37.5 litres        |                 |
| <b>Weight</b>                          |           | 2.07 kg            |                 |
| Article code                           | U-channel | Base               | Handles         |
| 15-6420-0                              | none      | ribbed             | 2 shell handles |
| 15-6420-25                             | none      | ribbed             | 2 handle slots  |
| 15-6420-400 *                          | none      | ribbed             | 2 shell handles |
| 15-6420-425 *                          | none      | ribbed             | 2 handle slots  |

**Containers with reinforced base**

| <b>Weight</b> |           | 2.35 kg              |                 |
|---------------|-----------|----------------------|-----------------|
| Article code  | U-channel | Base                 | Handles         |
| 15-6420-0-V   | none      | enclosed double base | 2 shell handles |
| 15-6420-150   | none      | heavy-duty b. 20 mm  | 2 shell handles |

\* = sidewalls: long sides solid, short sides perforated

Article code with **R** =  
made of recycled materialStock items (SKU), for all other items please  
request the minimum order quantities.

Base dimension **600 x 400 mm**



Standard colour  
iron grey

Height **220 mm**

| Internal dimensions base        | 565 x 365 x 205 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 208 mm             |        |                 |
| Usable internal height in stack | 193 mm             |        |                 |
| Volume                          | 42.0 litres        |        |                 |
| Weight                          | 2.14 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 5-6422N-1                       | closed             | ribbed | 2 handle slots  |
| 5-6422N-2                       | open               | ribbed | 4 shell handles |
| 5-6422N-3 R                     | closed             | ribbed | 4 shell handles |
| 5-6422N-3                       | closed             | ribbed | 4 shell handles |
| 5-6422N-4                       | open               | ribbed | 2 handle slots  |

**Containers with reinforced base**

| Weight       | 2.51 kg   |                      |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-6422N-1-V  | closed    | enclosed double base | 2 handle slots  |
| 5-6422N-2-V  | open      | enclosed double base | 4 shell handles |
| 5-6422N-3-V  | closed    | enclosed double base | 4 shell handles |
| 5-6422N-4-V  | open      | enclosed double base | 2 handle slots  |
| 5-6422N-80   | closed    | heavy-duty b. 20 mm  | 4 shell handles |
| 5-6422N-81   | closed    | heavy-duty b. 20 mm  | 2 handle slots  |
| 5-6422N-82   | open      | heavy-duty b. 20 mm  | 4 shell handles |
| 5-6422N-83   | open      | heavy-duty b. 20 mm  | 2 shell handles |



Height **220 mm**

| Internal dimensions base        | 568 x 368 x 204 mm |        |                 |
|---------------------------------|--------------------|--------|-----------------|
| Stacking height                 | 207 mm             |        |                 |
| Usable internal height in stack | 189 mm             |        |                 |
| Volume                          | 43.0 litres        |        |                 |
| Weight                          | 2.30 kg            |        |                 |
| Article code                    | U-channel          | Base   | Handles         |
| 15-6422-0                       | none               | ribbed | 2 shell handles |
| 15-6422-25                      | none               | ribbed | 2 handle slots  |

*Oeco-line*

Article code with **R** =  
made of recycled material

Stock items (SKU), for all other items please  
request the minimum order quantities.

Base dimension **600 x 400 mm****Height 220 mm**

| Internal dimensions base        | 565 x 365 x 205 mm                         |        |                 |
|---------------------------------|--------------------------------------------|--------|-----------------|
| Stacking height                 | 208 mm                                     |        |                 |
| Usable internal height in stack | 193 mm                                     |        |                 |
| Volume                          | 42.0 litres                                |        |                 |
| Weight                          | 2.14 kg                                    |        |                 |
| Guide notches                   | 1 each on the longitudinal and short walls |        |                 |
| Article code                    | U-channel                                  | Base   | Handles         |
| 5-6422N-582                     | closed                                     | ribbed | 4 shell handles |

**Partition panels**


| Article code | External dimensions | Position   |
|--------------|---------------------|------------|
| 80-6530-1    | 564 x 190 x 3 mm    | lengthwise |
| 80-6530-2    | 364 x 190 x 3 mm    | crosswise  |

**Height 220 mm**

| Internal dimensions base        | 565 x 365 x 205 mm           |                     |                 |
|---------------------------------|------------------------------|---------------------|-----------------|
| Stacking height                 | 208 mm                       |                     |                 |
| Usable internal height in stack | 193 mm                       |                     |                 |
| Volume                          | 42.0 litres                  |                     |                 |
| Weight                          | 2.56 kg                      |                     |                 |
| Guide notches, protruding       | 3 on both longitudinal walls |                     |                 |
| Article code                    | U-channel                    | Base                | Handles         |
| 5-6422N-561                     | closed                       | heavy-duty b. 20 mm | 4 shell handles |

**Partition panel**

| Article code | External dimensions | Position  |
|--------------|---------------------|-----------|
| 26-3-0084    | 364 x 175 x 3 mm    | crosswise |

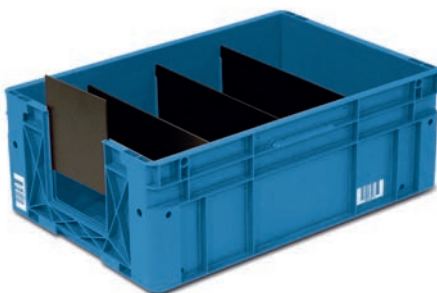**Height 220 mm**

| Internal dimensions base        | 565 x 365 x 205 mm           |                     |                 |
|---------------------------------|------------------------------|---------------------|-----------------|
| Stacking height                 | 208 mm                       |                     |                 |
| Usable internal height in stack | 193 mm                       |                     |                 |
| Volume                          | 42.0 litres                  |                     |                 |
| Weight                          | 2.43 kg                      |                     |                 |
| Guide notches, protruding       | 3 on both longitudinal walls |                     |                 |
| Article code                    | U-channel                    | Base                | Handles         |
| 5-6422N-576                     | closed                       | heavy-duty b. 16 mm | 3 shell handles |

**Partition panel**

| Article code | External dimensions | Position  |
|--------------|---------------------|-----------|
| 26-3-0106    | 364 x 185 x 3 mm    | crosswise |

**Slide in panel for front opening**

| Article code | External dimensions |
|--------------|---------------------|
| 26-3-0107    | 157 x 157 x 3 mm    |

Base dimension **600 x 400 mm****Height 220 mm**

|                                        |                                                  |                                |                 |
|----------------------------------------|--------------------------------------------------|--------------------------------|-----------------|
| <b>Internal dimensions base</b>        | 566 x 366 x 197 mm                               |                                |                 |
| <b>Stacking height</b>                 | 208 mm                                           |                                |                 |
| <b>Usable internal height in stack</b> | 185 mm                                           |                                |                 |
| <b>Volume</b>                          | 40.0 litres                                      |                                |                 |
| <b>Weight</b>                          | 2.70 kg                                          |                                |                 |
| <b>Guide notches, recessed</b>         | 3 on the longitudinal walls, 1 on the short wall |                                |                 |
| <b>Article code</b>                    | <b>U-channel</b>                                 | <b>Base</b>                    | <b>Handles</b>  |
| 55-6040A-220 R                         | none                                             | diagonally ribbed special base | 4 shell handles |

**Partition panels**

|                     |                            |                    |                 |
|---------------------|----------------------------|--------------------|-----------------|
| <b>Article code</b> | <b>External dimensions</b> | <b>Execution</b>   | <b>Position</b> |
| 55-6000A-220-01     | 578 x 184 x 9 mm           | with 5 guide slots | lengthwise      |
| 55-6000A-220-11     | 578 x 184 x 9 mm           | with 3 guide slots | lengthwise      |
| 55-4000A-220-01     | 378 x 184 x 9 mm           | with 1 guide slot  | crosswise       |

**Height 265 mm**

|                                        |                    |             |                 |
|----------------------------------------|--------------------|-------------|-----------------|
| <b>Internal dimensions base</b>        | 565 x 365 x 250 mm |             |                 |
| <b>Stacking height</b>                 | 252 mm             |             |                 |
| <b>Usable internal height in stack</b> | 237 mm             |             |                 |
| <b>Volume</b>                          | 52.0 litres        |             |                 |
| <b>Weight</b>                          | 2.51 kg            |             |                 |
| <b>Article code</b>                    | <b>U-channel</b>   | <b>Base</b> | <b>Handles</b>  |
| 5-6427N-1                              | closed             | ribbed      | 2 handle slots  |
| 5-6427N-2                              | open               | ribbed      | 4 shell handles |
| 5-6427N-3                              | closed             | ribbed      | 4 shell handles |
| 5-6427N-4                              | open               | ribbed      | 2 handle slots  |
| 5-6427-303                             | closed             | solid       | 4 shell handles |

**Containers with reinforced base**

|                     |                  |                      |                 |
|---------------------|------------------|----------------------|-----------------|
| <b>Weight</b>       | 2.89 kg          |                      |                 |
| <b>Article code</b> | <b>U-channel</b> | <b>Base</b>          | <b>Handles</b>  |
| 5-6427N-1-V         | closed           | enclosed double base | 2 handle slots  |
| 5-6427N-2-V         | open             | enclosed double base | 4 shell handles |
| 5-6427N-3-V         | closed           | enclosed double base | 4 shell handles |
| 5-6427N-4-V         | open             | enclosed double base | 2 handle slots  |

**Height 268 mm****Containers with reinforced base**

|                                        |                    |                     |                 |
|----------------------------------------|--------------------|---------------------|-----------------|
| <b>Internal dimensions base</b>        | 565 x 365 x 245 mm |                     |                 |
| <b>Stacking height</b>                 | 255 mm             |                     |                 |
| <b>Usable internal height in stack</b> | 232 mm             |                     |                 |
| <b>Volume</b>                          | 52.0 litres        |                     |                 |
| <b>Weight</b>                          | 2.88 kg            |                     |                 |
| <b>Article code</b>                    | <b>U-channel</b>   | <b>Base</b>         | <b>Handles</b>  |
| 5-6427N-80                             | closed             | heavy-duty b. 20 mm | 4 shell handles |
| 5-6427N-81                             | closed             | heavy-duty b. 20 mm | 2 handle slots  |
| 5-6427N-82                             | open               | heavy-duty b. 20 mm | 4 shell handles |
| 5-6427N-84                             | open               | heavy-duty b. 20 mm | 2 handle slots  |

Article code with **R** =  
made of recycled material

Base dimension **600 x 400 mm****Height 270 mm**

|                                        |                    |             |                 |
|----------------------------------------|--------------------|-------------|-----------------|
| <b>Internal dimensions base</b>        | 568 x 368 x 253 mm |             |                 |
| <b>Stacking height</b>                 | 256 mm             |             |                 |
| <b>Usable internal height in stack</b> | 238 mm             |             |                 |
| <b>Volume</b>                          | 53.0 litres        |             |                 |
| <b>Weight</b>                          | 2.40 kg            |             |                 |
| <b>Article code</b>                    | <b>U-channel</b>   | <b>Base</b> | <b>Handles</b>  |
| 15-6427-0                              | none               | ribbed      | 2 shell handles |
| 15-6427-25                             | none               | ribbed      | 2 handle slots  |

**Height 270 mm**

|                                        |                                                  |                      |                 |
|----------------------------------------|--------------------------------------------------|----------------------|-----------------|
| <b>Internal dimensions base</b>        | 566 x 366 x 251 mm                               |                      |                 |
| <b>Stacking height</b>                 | 254 mm                                           |                      |                 |
| <b>Usable internal height in stack</b> | 235 mm                                           |                      |                 |
| <b>Volume</b>                          | 52.0 litres                                      |                      |                 |
| <b>Weight</b>                          | 2.35 kg                                          |                      |                 |
| <b>Guide notches, recessed</b>         | 5 on the longitudinal walls, 1 on the short wall |                      |                 |
| <b>Article code</b>                    | <b>U-channel</b>                                 | <b>Base</b>          | <b>Handles</b>  |
| 55-6040A-270-1 R                       | none                                             | ribbed               | 4 shell handles |
| 55-6040A-270-1-V R                     | none                                             | enclosed double base | 4 shell handles |

**Partition panels**

|                     |                            |                    |                 |
|---------------------|----------------------------|--------------------|-----------------|
| <b>Article code</b> | <b>External dimensions</b> | <b>Execution</b>   | <b>Position</b> |
| 55-6000A-270-01     | 578 x 243 x 9 mm           | with 5 guide slots | lengthwise      |
| 55-4000A-270-11     | 378 x 243 x 9 mm           | with 1 guide slot  | crosswise       |

**Height 280 mm**

|                                        |                    |             |                 |
|----------------------------------------|--------------------|-------------|-----------------|
| <b>Internal dimensions top</b>         | 567 x 367 mm       |             |                 |
| <b>Internal dimensions base</b>        | 565 x 365 x 263 mm |             |                 |
| <b>Stacking height</b>                 | 266 mm             |             |                 |
| <b>Usable internal height in stack</b> | 249 mm             |             |                 |
| <b>Volume</b>                          | 54.0 litres        |             |                 |
| <b>Weight</b>                          | 2.50 kg            |             |                 |
| <b>Article code</b>                    | <b>U-channel</b>   | <b>Base</b> | <b>Handles</b>  |
| 15-6428-0                              | none               | ribbed      | 2 shell handles |
| 15-6428-25                             | none               | ribbed      | 2 handle slots  |

**Containers with reinforced base**

|                     |                  |                      |                 |
|---------------------|------------------|----------------------|-----------------|
| <b>Weight</b>       | 2.88 kg          |                      |                 |
| <b>Article code</b> | <b>U-channel</b> | <b>Base</b>          | <b>Handles</b>  |
| 15-6428-0-V         | none             | enclosed double base | 2 shell handles |
| 15-6428-575         | none             | heavy-duty b. 20 mm  | 2 handle slots  |

Article code with **R** =  
made of recycled material

Base dimension **600 x 400 mm**



Standard colour  
iron grey

Also available with heavy-duty base 23 mm.



Height **320 mm**

| Internal dimensions base        |           | 565 x 365 x 305 mm |                 |
|---------------------------------|-----------|--------------------|-----------------|
| Stacking height                 |           | 308 mm             |                 |
| Usable internal height in stack |           | 293 mm             |                 |
| Volume                          |           | 63.0 litres        |                 |
| Weight                          |           | 2.85 kg            |                 |
| Article code                    | U-channel | Base               | Handles         |
| 5-6432N-1                       | closed    | ribbed             | 2 handle slots  |
| 5-6432N-2                       | open      | ribbed             | 4 shell handles |
| 5-6432N-3 R                     | closed    | ribbed             | 4 shell handles |
| 5-6432N-3                       | closed    | ribbed             | 4 shell handles |
| 5-6432N-4                       | open      | ribbed             | 2 handle slots  |

**Containers with reinforced base**

| Weight       |           | 3.28 kg              |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 5-6432N-1-V  | closed    | enclosed double base | 2 handle slots  |
| 5-6432N-2-V  | open      | enclosed double base | 4 shell handles |
| 5-6432N-3-V  | closed    | enclosed double base | 4 shell handles |
| 5-6432N-4-V  | open      | enclosed double base | 2 handle slots  |
| 5-6432N-20   | closed    | heavy-duty b. 17 mm  | 4 shell handles |
| 5-6432N-21   | closed    | heavy-duty b. 17 mm  | 2 handle slots  |
| 5-6432N-22   | open      | heavy-duty b. 17 mm  | 4 shell handles |
| 5-6432N-24   | open      | heavy-duty b. 17 mm  | 2 handle slots  |

Height **320 mm**

| Internal dimension top          |           | 567 x 367 mm       |                 |
|---------------------------------|-----------|--------------------|-----------------|
| Internal dimensions base        |           | 565 x 365 x 303 mm |                 |
| Stacking height                 |           | 306 mm             |                 |
| Usable internal height in stack |           | 289 mm             |                 |
| Volume                          |           | 63.0 litres        |                 |
| Weight                          |           | 2.70 kg            |                 |
| Article code                    | U-channel | Base               | Handles         |
| 15-6432-0                       | none      | ribbed             | 2 shell handles |
| 15-6432-25                      | none      | ribbed             | 2 handle slots  |

**Containers with reinforced base**

| Weight       |           | 3.00 kg              |                 |
|--------------|-----------|----------------------|-----------------|
| Article code | U-channel | Base                 | Handles         |
| 15-6432-0-V  | none      | enclosed double base | 2 shell handles |
| 15-6432-575  | none      | heavy-duty b. 20 mm  | 2 handle slots  |

Height **320 mm**

| Internal dimensions base        |           | 569 x 369 x 304 mm                         |                |
|---------------------------------|-----------|--------------------------------------------|----------------|
| Stacking height                 |           | 308 mm                                     |                |
| Usable internal height in stack |           | 290 mm                                     |                |
| Volume                          |           | 63.0 litres                                |                |
| Weight                          |           | 2.60 kg                                    |                |
| Special version                 |           | 1 short side with sliding wall             |                |
| Article code                    | U-channel | Base                                       | Handles        |
| 15-6432-650                     | none      | enclosed double base, water drainage holes | 2 handle slots |

Base dimension **600 x 400 mm****Height 320 mm**

|                                        |                                                  |
|----------------------------------------|--------------------------------------------------|
| <b>Internal dimensions base</b>        | 565 x 365 x 303.5 mm                             |
| <b>Stacking height</b>                 | 308 mm                                           |
| <b>Usable internal height in stack</b> | 291.5 mm                                         |
| <b>Volume</b>                          | 62.0 litres                                      |
| <b>Weight</b>                          | 2.99 kg                                          |
| <b>Guide notches, recessed</b>         | 5 on the longitudinal walls, 1 on the short wall |

| Article code     | U-channel | Base                 | Handles         |
|------------------|-----------|----------------------|-----------------|
| 55-6040A-320-V R | none      | enclosed double base | 4 shell handles |

**Partition panels**

| Article code    | External dimensions | Execution          | Position   |
|-----------------|---------------------|--------------------|------------|
| 55-6000A-320-21 | 578 x 290 x 9 mm    | with 5 guide slots | lengthwise |
| 55-6000A-320-22 | 578 x 290 x 9 mm    | with 2 guide slots | lengthwise |
| 55-6000A-320-23 | 578 x 290 x 9 mm    | with 3 guide slots | lengthwise |
| 55-6000A-320-24 | 578 x 290 x 9 mm    | with 3 guide slot  | lengthwise |
| 55-4000A-320-21 | 378 x 290 x 9 mm    | with 1 guide slot  | crosswise  |

**Height 320 mm**

|                                        |                                                  |
|----------------------------------------|--------------------------------------------------|
| <b>Internal dimensions base</b>        | 565 x 365 x 297.5 mm                             |
| <b>Stacking height</b>                 | 308 mm                                           |
| <b>Usable internal height in stack</b> | 291.5 mm                                         |
| <b>Volume</b>                          | 62.0 litres                                      |
| <b>Weight</b>                          | 3.30 kg                                          |
| <b>Guide notches, recessed</b>         | 5 on the longitudinal walls, 1 on the short wall |

| Article code     | U-channel | Base              | Handles         |
|------------------|-----------|-------------------|-----------------|
| 55-6040A-320-4 R | none      | diagonally ribbed | 4 shell handles |

**Partition panels**

| Article code   | External dimensions | Execution          | Position   |
|----------------|---------------------|--------------------|------------|
| 55-6000A-320-1 | 578 x 284 x 9 mm    | with 5 guide slots | lengthwise |
| 55-6000A-320-2 | 578 x 290 x 9 mm    | with 2 guide slots | lengthwise |
| 55-6000A-320-3 | 578 x 290 x 9 mm    | with 3 guide slots | lengthwise |
| 55-6000A-320-4 | 578 x 290 x 9 mm    | with 3 guide slot  | lengthwise |
| 55-4000A-320-1 | 378 x 290 x 9 mm    | with 1 guide slot  | crosswise  |

Article code with **R** =  
made of recycled material

Base dimension **600 x 400 mm**



### Height 370 mm

| <b>Internal dimensions base</b>        |           | 565 x 365 x 355 mm |                 |
|----------------------------------------|-----------|--------------------|-----------------|
| <b>Stacking height</b>                 |           | 358 mm             |                 |
| <b>Usable internal height in stack</b> |           | 343 mm             |                 |
| <b>Volume</b>                          |           | 73.2 litres        |                 |
| <b>Weight</b>                          |           | 3.15 kg            |                 |
| Article code                           | U-channel | Base               | Handles         |
| 5-6437N-0                              | closed    | ribbed             | 4 shell handles |
| 5-6437N-1                              | open      | ribbed             | 2 handle slots  |
| 5-6437N-2                              | open      | ribbed             | 4 shell handles |
| 5-6437N-3                              | closed    | ribbed             | 4 shell handles |
| 5-6437N-4                              | open      | ribbed             | 2 handle slots  |

### Containers with reinforced base

| <b>Weight</b> |           | 3.50 kg             |                 |
|---------------|-----------|---------------------|-----------------|
| Article code  | U-channel | Base                | Handles         |
| 5-6437N-80    | closed    | heavy-duty b. 20 mm | 4 shell handles |
| 5-6437N-81    | closed    | heavy-duty b. 20 mm | 2 handle slots  |
| 5-6437N-82    | open      | heavy-duty b. 20 mm | 4 shell handles |
| 5-6437N-83    | closed    | heavy-duty b. 20 mm | 4 shell handles |
| 5-6437N-84    | open      | heavy-duty b. 20 mm | 2 handle slots  |



### Height 420 mm

| <b>Internal dimensions base</b>        |           | 565 x 365 x 405 mm |                 |
|----------------------------------------|-----------|--------------------|-----------------|
| <b>Stacking height</b>                 |           | 408 mm             |                 |
| <b>Usable internal height in stack</b> |           | 393 mm             |                 |
| <b>Volume</b>                          |           | 84.0 litres        |                 |
| <b>Weight</b>                          |           | 3.66 kg            |                 |
| Article code                           | U-channel | Base               | Handles         |
| 5-6442-2                               | open      | ribbed             | 4 shell handles |
| 5-6442-3                               | closed    | ribbed             | 4 shell handles |
| 5-6442-4                               | open      | ribbed             | 2 handle slots  |
| 5-6442-7                               | closed    | ribbed             | 2 handle slots  |

### Containers with reinforced base

| <b>Weight</b> |           | 4.03 kg              |                 |
|---------------|-----------|----------------------|-----------------|
| Article code  | U-channel | Base                 | Handles         |
| 5-6442-2-V    | open      | enclosed double base | 4 shell handles |
| 5-6442-3-V    | closed    | enclosed double base | 4 shell handles |
| 5-6442-4-V    | open      | enclosed double base | 2 handle slots  |
| 5-6442-7-V    | closed    | enclosed double base | 2 handle slots  |
| 5-6442-20     | closed    | heavy-duty b. 17 mm  | 4 shell handles |
| 5-6442-21     | closed    | heavy-duty b. 17 mm  | 2 handle slots  |
| 5-6442-22     | open      | heavy-duty b. 17 mm  | 4 shell handles |
| 5-6442-24     | open      | heavy-duty b. 17 mm  | 2 handle slots  |

Base dimension **650 x 450 mm**Height **420 mm****Container with reinforced base**

| Internal dimensions base        | 568 x 368 x 403 mm |                      |                |
|---------------------------------|--------------------|----------------------|----------------|
| Stacking height                 | 406 mm             |                      |                |
| Usable internal height in stack | 389 mm             |                      |                |
| Volume                          | 84.0 litres        |                      |                |
| Weight                          | 4.03 kg            |                      |                |
| Article code                    | U-channel          | Base                 | Handles        |
| 15-6442-3-V                     | none               | enclosed double base | 2 handle slots |

Height **220 mm**

| Internal dimensions base        | 613 x 413 x 190 mm                               |                      |                 |
|---------------------------------|--------------------------------------------------|----------------------|-----------------|
| Stacking height                 | 207 mm                                           |                      |                 |
| Usable internal height in stack | 190 mm                                           |                      |                 |
| Volume                          | 48.0 litres                                      |                      |                 |
| Weight                          | 2.80 kg                                          |                      |                 |
| Guide notches, recessed         | 5 on the longitudinal walls, 1 on the short wall |                      |                 |
| Article code                    | U-channel                                        | Base                 | Handles         |
| 55-6545F-0220-2                 | none                                             | enclosed double base | 4 shell handles |

**Partition panels**

| Article code  | External dimensions | Execution          | Position   |
|---------------|---------------------|--------------------|------------|
| 55-6500F-0220 | 628 x 184 x 9.5 mm  | with 5 guide slots | lengthwise |
| 55-4500F-0220 | 428 x 184 x 9.5 mm  | with 1 guide slot  | crosswise  |

Height **320 mm**

| Internal dimensions base        | 613 x 413 x 290 mm                               |                      |                 |
|---------------------------------|--------------------------------------------------|----------------------|-----------------|
| Stacking height                 | 307 mm                                           |                      |                 |
| Usable internal height in stack | 290 mm                                           |                      |                 |
| Volume                          | 73.0 litres                                      |                      |                 |
| Weight                          | 3.42 kg                                          |                      |                 |
| Guide notches, recessed         | 5 on the longitudinal walls, 1 on the short wall |                      |                 |
| Article code                    | U-channel                                        | Base                 | Handles         |
| 55-6545F-0320-2                 | none                                             | enclosed double base | 4 shell handles |

**Partition panels**

| Article code  | External dimensions | Execution          | Position   |
|---------------|---------------------|--------------------|------------|
| 55-6500F-0320 | 628 x 284 x 9.5 mm  | with 5 guide slots | lengthwise |
| 55-4500F-0320 | 428 x 284 x 9.5 mm  | with 1 guide slot  | crosswise  |

## Lids for EUROTEC



3-215S-1-11

3-215Z-0

3-215Z-1-11

54-3020-0

20-2065.1

20-2144-4  
20-2144.2

3-214Z-0

3-924-3 R

20-2064-Z

20-2130

Base dimension **200 x 150 mm**

| Article code | Model     |
|--------------|-----------|
| 3-944-0      | loose lid |

Base dimension **300 x 200 mm**

| Article code  | Model                                             |
|---------------|---------------------------------------------------|
| 3-215S-1-11   | hinged lid with snap locks and transparent window |
| 3-215Z-0      | loose lid                                         |
| 3-215Z-1-11   | hinged lid with snap locks                        |
| 3-215Z-1-11 R | hinged lid with snap locks                        |
| 54-3020-0     | loose lid                                         |
| 20-2065.1     | dust cover, thermoformed, wall thickness 0,5 mm   |

Base dimension **400 x 300 mm**

| Article code | Model                                                        |
|--------------|--------------------------------------------------------------|
| 20-2144-4    | slip lid with gripping action                                |
| 20-2144.2    | slip lid with gripping action and holes for sealing          |
| 3-214Z-0     | loose lid                                                    |
| 3-924-3 R    | slip lid with hooks<br>(lid not suitable for EUROTEC 5-4317) |
| * 20-2064-Z  | dust cover, thermoformed, wall thickness 0.8 mm              |
| * 20-2130    | loose lid, thermoformed, wall thickness 2 mm                 |

### Standard colours


|  |             |
|--|-------------|
|  | dark grey   |
|  | black       |
|  | dark blue   |
|  | yellow      |
|  | transparent |



Article code with **R** =  
made of UIC® recycled material

Stock items (SKU), for all other items please  
request the minimum order quantities.

## Lids for EUROTEC

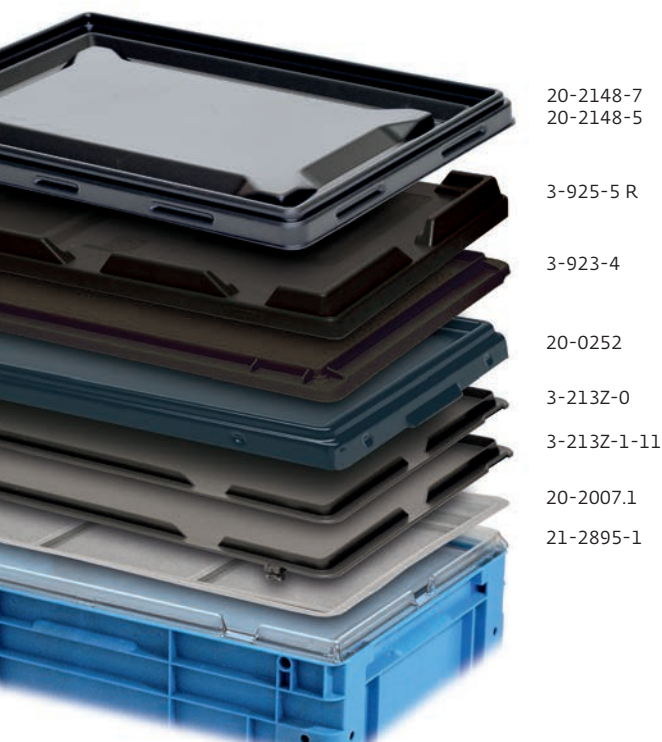

20-2148-7  
20-2148-5

3-925-5 R

3-923-4


20-0252

3-213Z-0

3-213Z-1-11

20-2007.1

21-2895-1

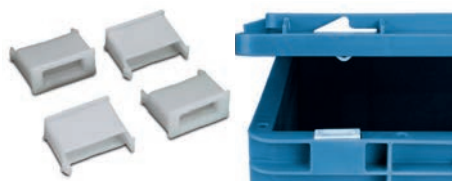

Base dimension **600 x 400 mm**

| Article code    | Model                                                                            |
|-----------------|----------------------------------------------------------------------------------|
| 20-2148-7       | slip lid with gripping action                                                    |
| 20-2148-5       | slip lid with gripping action and holes for sealing                              |
| 3-925-5 R       | slip lid                                                                         |
| 3-923-4 R       | slip lid with hooks                                                              |
| 20-0252         | slip lid with gripping action                                                    |
| 3-213Z-0        | loose lid                                                                        |
| 3-213Z-1-11     | hinged lid with snap locks (suitable only for EUROTEC 15-6415-152 and 15-6428-0) |
| 3-213Z-1-11 R   | hinged lid with snap locks (suitable only for EUROTEC 15-6415-152 and 15-6428-0) |
| 3-213Z-1-255-11 | hinged lid with snap locks (suitable only for EUROTEC 15-6415-152 and 15-6428-0) |
| 20-2007.1       | dust cover, thermoformed, wall thickness 1 mm                                    |
| 21-2895-1       | loose lid, thermoformed, wall thickness 2.5 mm                                   |

### Adapter for snap locks

| Article code | Remark                                                                                   |
|--------------|------------------------------------------------------------------------------------------|
| 89-7-009     | to attach the lid to the container (4 adapters required), to fit lid 3-924-3 and 3-923-4 |

## Cover for EUROTEC



21-0751

Base dimension **800 x 600 mm**

| Article code | Model                                    |
|--------------|------------------------------------------|
| 20-2103-2    | cover, thermoformed, wall thickness 4 mm |

Base dimension **1200 x 800 mm**

| Article code | Model                                    |
|--------------|------------------------------------------|
| 20-0751      | cover, thermoformed, wall thickness 3 mm |

Base dimension **1200 x 1000 mm**

| Article code | Model                                    |
|--------------|------------------------------------------|
| 21-0780-1    | cover, thermoformed, wall thickness 5 mm |

### Standard colours


|  |                     |
|--|---------------------|
|  | dark grey           |
|  | transparent         |
|  | translucent natural |
|  | pale blue           |
|  | dark blue           |
|  | scarlet             |
|  | yellow              |
|  | black               |

*Oeco-line*

Article code with **R** =  
made of UIC® recycled material

Stock items (SKU), for all other items please  
request the minimum order quantities.

## Removable boxes

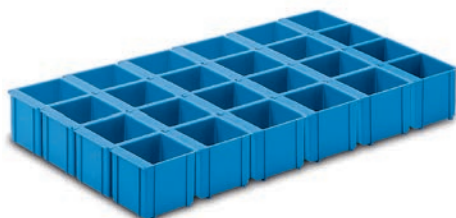

### For base dimension 400 x 300 mm

suitable for 120 mm container height

| Article code | Article   | External dimensions | Size                                                                                    |
|--------------|-----------|---------------------|-----------------------------------------------------------------------------------------|
| 3-910        | container | 130 x 91 x 88 mm    |  1/8 |
| 3-909        | container | 182 x 130 x 88 mm   |  1/4 |
| 3-908        | container | 260 x 182 x 88      |  1/2 |

### For base dimension 600 x 400 mm

suitable for 120 mm container height

| Article code | Article   | External dimensions | Size                                                                                     |
|--------------|-----------|---------------------|------------------------------------------------------------------------------------------|
| 3-907-2      | container | 95 x 92 x 80 mm     |  1/24 |

suitable for 170 mm container height

| Article code | Article   | External dimensions | Size                                                                                       |
|--------------|-----------|---------------------|--------------------------------------------------------------------------------------------|
| 3-905-2      | container | 189 x 92 x 150 mm   |  1/12 |
| 3-906-2      | container | 189 x 184 x 150 mm  |  1/6  |

suitable for 120 mm container height

| Article code | Article   | External dimensions | Size                                                                                       |
|--------------|-----------|---------------------|--------------------------------------------------------------------------------------------|
| 3-996        | container | 142 x 92 x 80 mm    |  1/16 |
| 3-995        | container | 284 x 184 x 80 mm   |  1/4  |

## Removable boxes



Standard colour    container  
light grey            lid  
transparent



Standard colour  
light grey



### For base dimension 600 x 400 mm

suitable for 120 mm container height

| Article code | Article   | External dimensions | Size                                                                                     |
|--------------|-----------|---------------------|------------------------------------------------------------------------------------------|
| 3-939N-42    | container | 139 x 89 x 99 mm    |  1/16 |
| 20-2117      | lid       | 138 x 88 mm         |                                                                                          |
| 3-903N-43    | container | 177 x 139 x 88 mm   |  1/8  |
| 20-2116      | lid       | 177 x 139 mm        |                                                                                          |
| 3-902N-43    | container | 277 x 177 x 99 mm   |  1/4  |
| 20-2115      | lid       | 277 x 177 mm        |                                                                                          |
| 3-901N-43    | container | 355 x 277 x 99 mm   |  1/2  |
| 20-2114      | lid       | 355 x 277 mm        |                                                                                          |

suitable for 278 mm container height

| Article code | Article   | External dimensions | Size                                                                                    |
|--------------|-----------|---------------------|-----------------------------------------------------------------------------------------|
| 3-922-3      | container | 277 x 177 x 230 mm  |  1/4 |

suitable for 120 mm container height

| Article code | Article   | External dimensions | Size                                                                                      |
|--------------|-----------|---------------------|-------------------------------------------------------------------------------------------|
| 3-929-3      | container | 555 x 177 x 99 mm   |  1/2 |
| 20-2118      | lid       | 553 x 177 mm        |                                                                                           |

suitable for 120 mm container height

| Article code | Article                                             | External dimensions | Size                                                                                      |
|--------------|-----------------------------------------------------|---------------------|-------------------------------------------------------------------------------------------|
| 20-2155      | container                                           | 181 x 140 x 91 mm   |  1/8 |
| 20-2154      | container, with 1 guide slot for partition panel    | 281 x 181 x 91 mm   |  1/2 |
| 20-2153      | container, with 1 guide slot for partition panel    | 363 x 281 x 91 mm   |  1/2 |
| 20-2152      | container, with 3 guide slots for partition panels  | 563 x 181 x 91 mm   |  1/2 |
| 26-3-170-80  | partition panel to fit articles 20-2152 and 20-2154 |                     |                                                                                           |
| 26-3-270-80  | partition panel to fit article 20-2153              |                     |                                                                                           |

Stock items (SKU), for all other items please request the minimum order quantities.

## Rubber foam inserts set



Standard colour  
dark grey



### Material: soft, PU HL 2551

| Article code | External dimensions | Set composed of                                                                                                     |
|--------------|---------------------|---------------------------------------------------------------------------------------------------------------------|
| 80-925-11.1  | 360 x 260 x 62 mm   | 1 perforated insert 10 mm thickness<br>2 perforated inserts 20 mm thickness<br>1 insert for lid<br>5 adhesive spots |
| 80-925-12.1  | 360 x 260 x 117 mm  | 3 perforated inserts 20 mm thickness<br>1 perforated insert 45 mm thickness<br>1 insert for lid<br>5 adhesive spots |
| 80-925-24.1  | 560 x 360 x 112 mm  | 3 perforated inserts 20 mm thickness<br>1 perforated insert 45 mm thickness<br>1 insert for lid<br>5 adhesive spots |

Stock items (SKU), for all other items please request the minimum order quantities.



*We are a climate-neutral company.  
Discover more under [www.utzgroup.com](http://www.utzgroup.com)*

